


# MAGNASPHERE HIGH SECURITY L1.5 INSTALLATION INSTRUCTIONS


**CAUTION: MAGNASPHERE MAGNET MODULES AND ANTI-REMOVAL MAGNETS ARE EXTREMELY POWERFUL: TAKE PRECAUTIONS TO AVOID THE MAGNETIC ATTRACTION OF SHARP TOOLS AND TO AVOID INJURY FROM THE PINCHING FORCE BETWEEN THE MAGNET AND FERROUS METALS OR OTHER MAGNETS.**

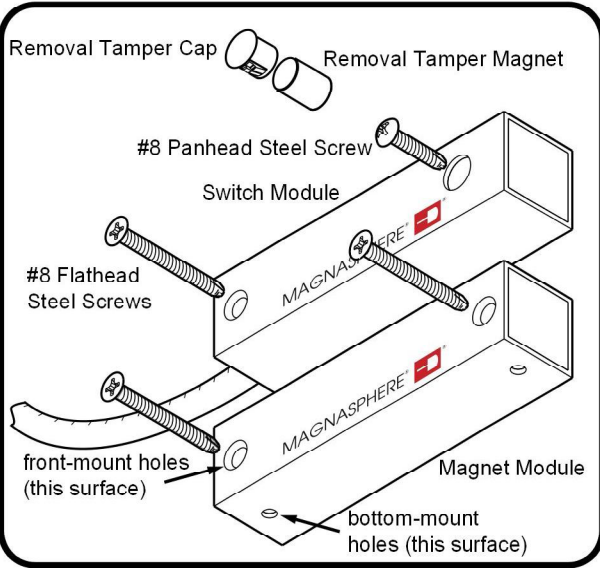

## Required Tools and Components

Provided by Manufacturer:  
 1 High Security L1.5 Switch Module  
 1 High Security L1.5 Magnet Module  
 1 Removal Tamper Magnet  
 2 Removal Tamper Caps  
 2 Spacers, 1/16"

Provided by Installer:  
 Power Drill  
 9/64" (3.5mm) Dia Drill Bit  
 3 x #8 x 1.5" (40mm) Flathead Screws, Self-Tapping recommended  
 1 x #8 x .5" (12mm) Panhead Screw, Self-Tapping recommended

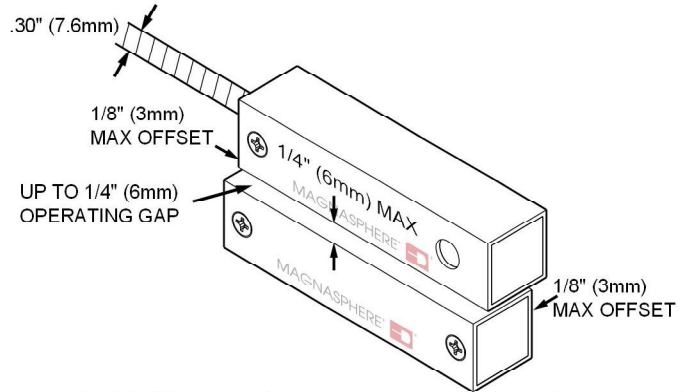

### Installation:


The High Security L1.5 should be mounted close to the latch side of the door: Up to 15" (38cm) from the doorknob/door-latch edge is recommended. Intended for operating gaps of up to 1/4" (6mm).

Alignment and orientation of the switch & magnet modules is critical for proper operation. Center-to-center alignment of the modules must be within 1/8" (3mm). The labeled faces of the modules must always have the same orientation.

For UL-qualified installations, only the following depicted configurations satisfy the requirements of UL634 High Security Level 1. Note the orientation of the labeled faces and the door-swing direction.


## INSWINGING DOOR INSTALLATION

(Switch affixed to door frame. Magnet mounted to door by front-mounting holes. Labels facing horizontally outward.)

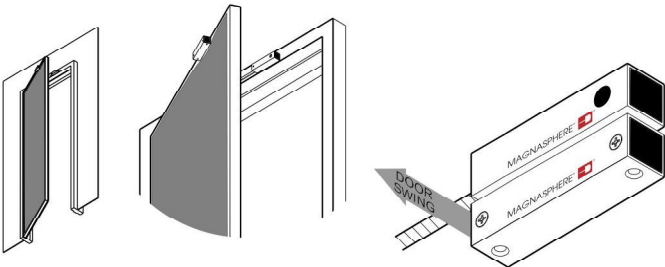

## OUTSWINGING DOOR INSTALLATION


(Switch affixed to door stop. Magnet mounted to door using bottom-mount holes. Labels facing downward.)

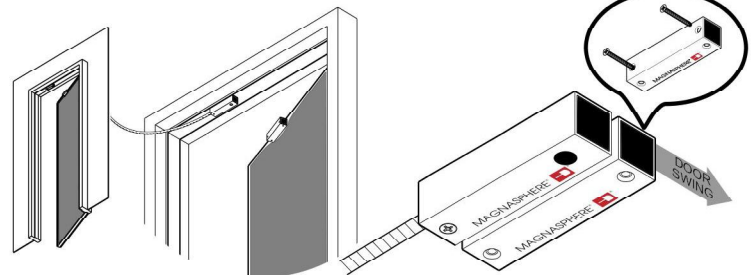

Installation: Flat-head screws are meant for all holes except for the large removal tamper in the switch module. Hold the switch module in position and drill one pilot hole; drive the #8 screw in until the module is seated. Repeat for the second hole. Maintain orientation and alignment of the modules as shown. Repeat these steps to secure the magnet module.

Wire the switch according to the schematic. Check the operation of the installed switch. The Removal Tamper circuit can be tested by withdrawing the Removal Tamper Magnet; use a magnet or piece of steel to withdraw the Removal Tamper Magnet.



Insert a Removal Tamper Cap to plug the switch's large hole. The 2nd removal cap is a spare.

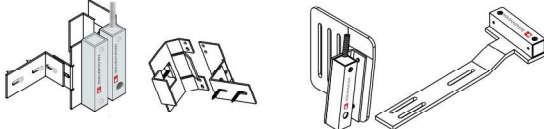

Adaptable to overhead doors and roll-up doors. See our online catalog for parts.



Secure door-stop extension available for unusually narrow door-stops. (P/N 1524)

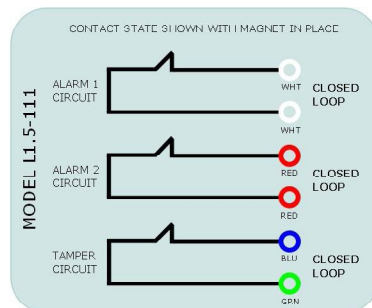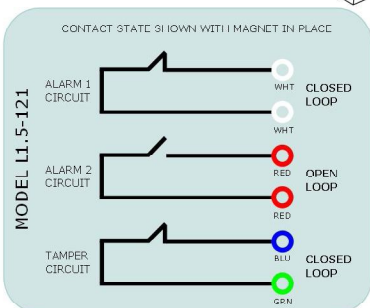

**SPECIFICATIONS PER CIRCUIT:**  
 MAXIMUM RATINGS:  
 250 mA  
 30 VDC RESISTIVE  
 0.25 W  
 Suitable for Outdoor or Indoor Use

Patents: 5530428, 6603378, RE39731, 8228191, & patents pending

L1\_5-XXX-INST REV2  
 26 APR 2013

**MAGNASPHERE**