



APPLICATION SPECIFICATION

TITLE

824-2170MHZ FLEXIBLE ANTENNA

TABLE OF CONTENTS

1.0 SCOPE

2.0 PRODUCT DESCRIPTION

3.0 APPLICABLE DOCUMENTS

4.0 ANTENNA PERFORMANCE

5.0 ASSEMBLY GUIDELINE

6.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 1 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

824-2170MHZ FLEXIBLE ANTENNA

1.0 SCOPE

This specification describes the antenna application and surrounding. The information in this document is for reference and benchmark purposes only. The user is responsible for validating antenna RF performance based on the user's actual implementation.

Antenna illustrations in this document are generic representations. They are not intended to be an image of any antenna listed in the scope.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)

Product name: 824-2170MHz Flexible Antenna


Series Number: 207235

2.2 DESCRIPTION

Series 207235 is super small size monopole and low profile flexible antenna for 824~960/1710~2170MHz band application. It's made from Poly-flexible material, has a tiny form factor (40.4mm x15.4mm x0.1mm) and has double-sided 3M adhesive for "peel and stick" easy mounting.

2.3 PRODUCT STRUCTURE INFORMATION

Please refer to PS-2072350100 for full information.

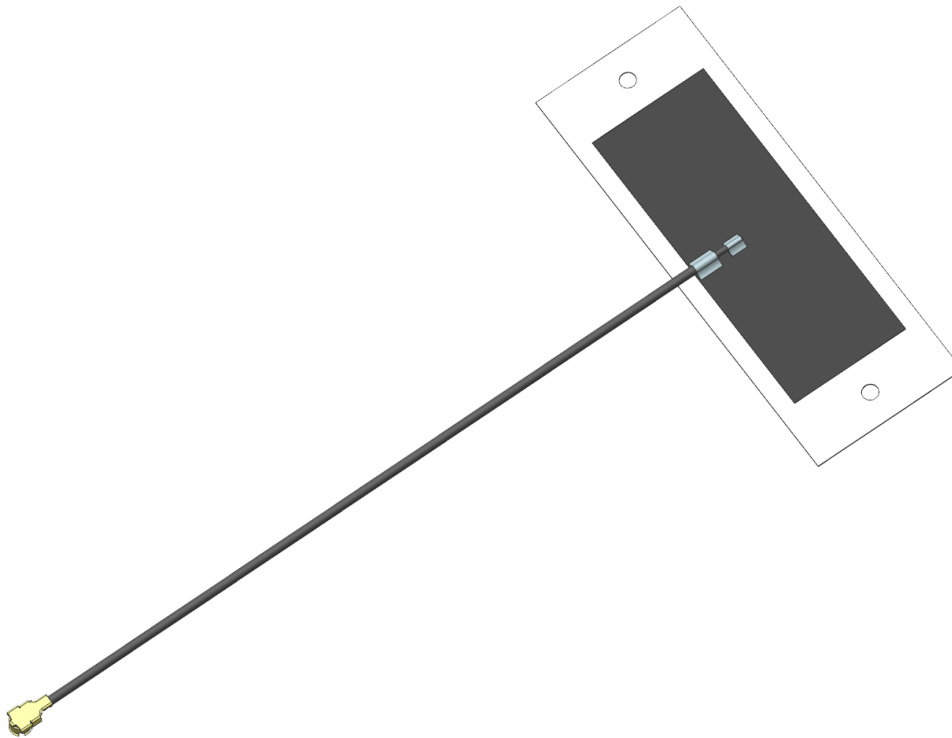

Molex 2072350100 824-2170MHz FLEXIBLE ANTENNA 3D VIEW

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 2 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

3.0 APPLICABLE DOCUMENTS

DOCUMENT	NUMBER	DESCRIPTION
Sale Drawing(SD)	SD-2072350100	Mechanical Dimension of the product
Product Specification (PS)	PS-2072350100	Product Specification
Packing Drawing(PK)	PK-2072350100	Product packaging specifications

4.0 ANTENNA PERFORMANCE

4.1 RF TEST CONDITIONS

All measurements are done of the antenna mounted on a PC/ABS material block of 2mm thickness with VNA Agilent 5071C and Over-The-Air (OTA) chamber. All measurements in this document are done with the part No.207235* with a cable length of 100mm, 150mm and 200mm.

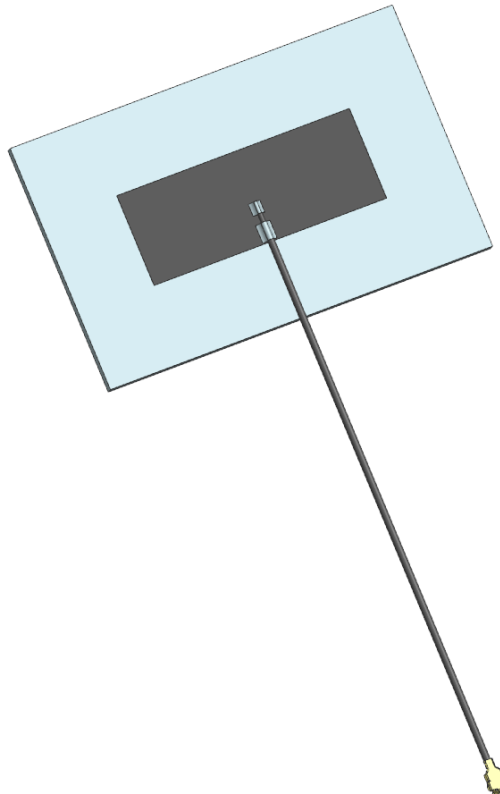


FIGURE4.1.1 ANTENNA LOADED WITH PC/ABS BLOCK OF 2MM THICKNESS

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 3 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

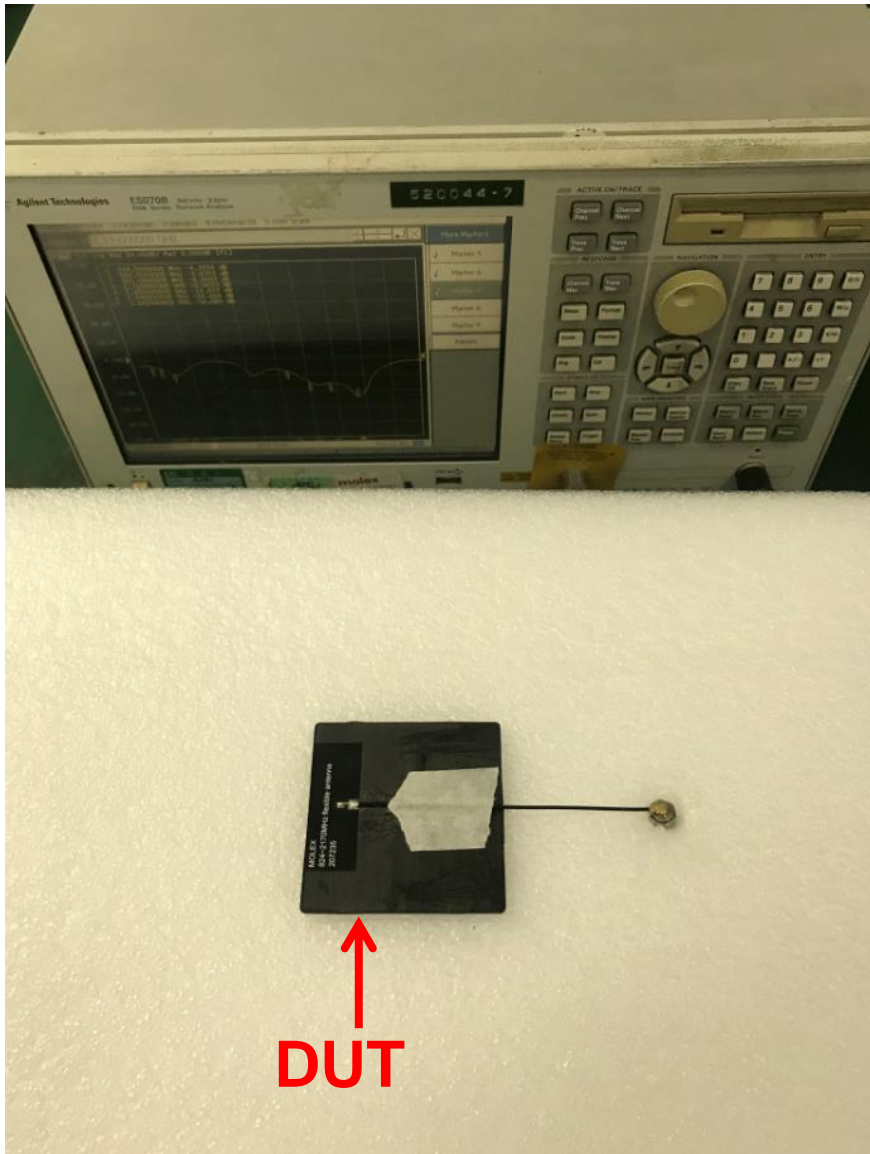


FIGURE 4.1.2 ANTENNA LOADED WITH PC/ABS BLOCK OF 2MM THICKNESS TESTED WITH VNA E5071C

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification		SHEET No. 4 of 36
DOCUMENT NUMBER: AS-2072350100		CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

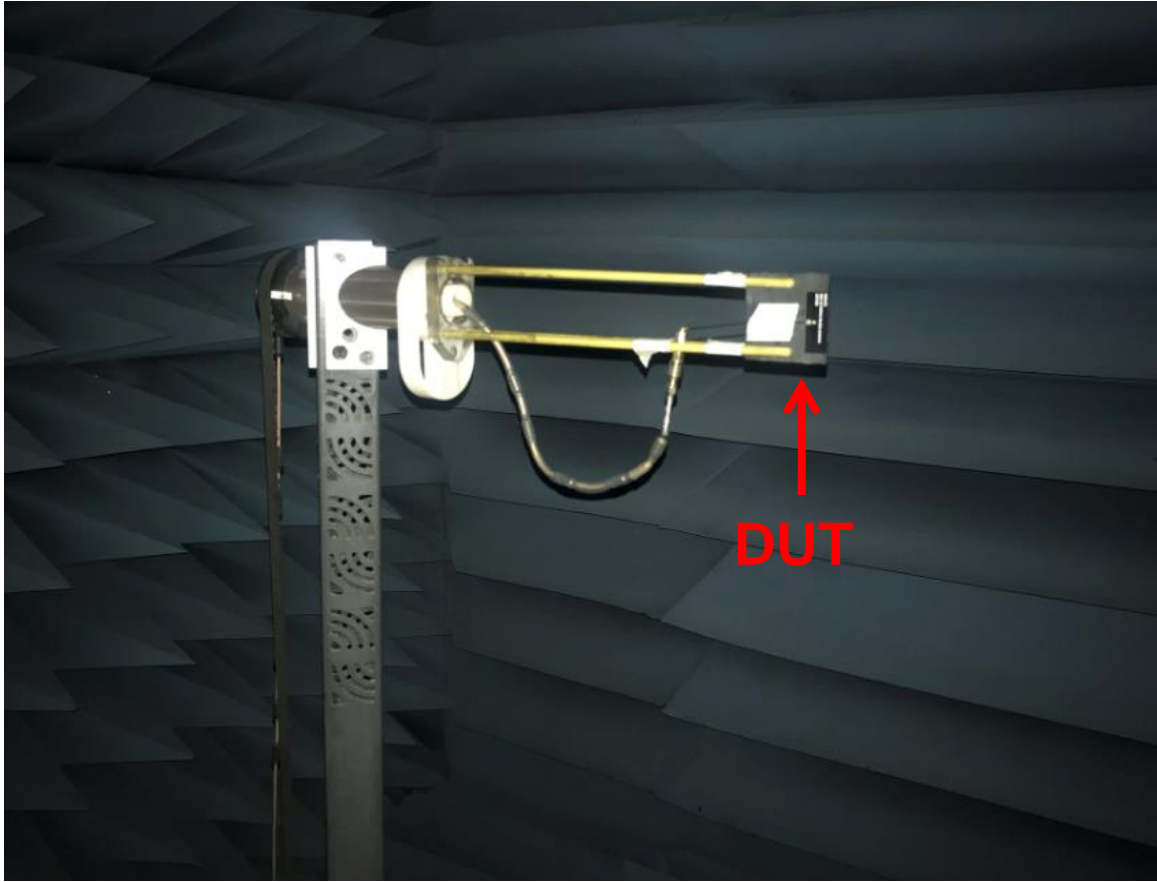


FIGURE4.1.3 ANTENNA LOADED WITH PC/ABS BLOCK OF 2MM THICKNESS TESTED IN OTA CHAMBER

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 5 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09



APPLICATION SPECIFICATION

4.2 ANTENNA PERFORMANCE

Description	Equipment	Requirement (Cable Length:100mm)		Requirement (Cable Length:150mm)		Requirement (Cable Length: 200mm)	
		824-960MHz	1710-2170MHz	824-960MHz	1710-2170MHz	824-960MHz	1710-2170MHz
Frequency Range	VNA E5071C	824-960MHz	1710-2170MHz	824-960MHz	1710-2170MHz	824-960MHz	1710-2170MHz
Return Loss	VNA E5071C	< -4 dB	< -6 dB	< -5 dB	< -8 dB	< -10 dB	< -10 dB
Peak Gain (Max)	OTA Chamber	0dBi	4.3dBi	0dBi	3.8dBi	0.6dBi	3.6dBi
Average Total Efficiency	OTA Chamber	30%	60%	31%	60%	40%	60%
Polarization	OTA Chamber	Linear					
Input Impedance	VNA E5071C	50 ohms					

Note that the above antenna performance is measured with just the antenna mounted on a PC/ABS block to similar a free-space condition. When implement into the system, the frequency resonant might be off-tune due to the loading of surrounding components especially metal plane. This off-tune can be compensated through matching. Although module manufacturers specify a peak gain limit, it is based on free-space conditions. The peak gain will be degraded by 1 to 2dBi in the actual implementation as the radiation pattern will change due to the surround components. As such, during selection of antenna, you can select one with high peak gain to compensate for the loss. Molex can offer assistant to choose the best location and best tuning in-order to meet this peak gain requirement.

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 6 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

4.3 RETURN LOSS PLOT

All measurements in this document are done with cable length of 100mm, 150mm and 200mm.

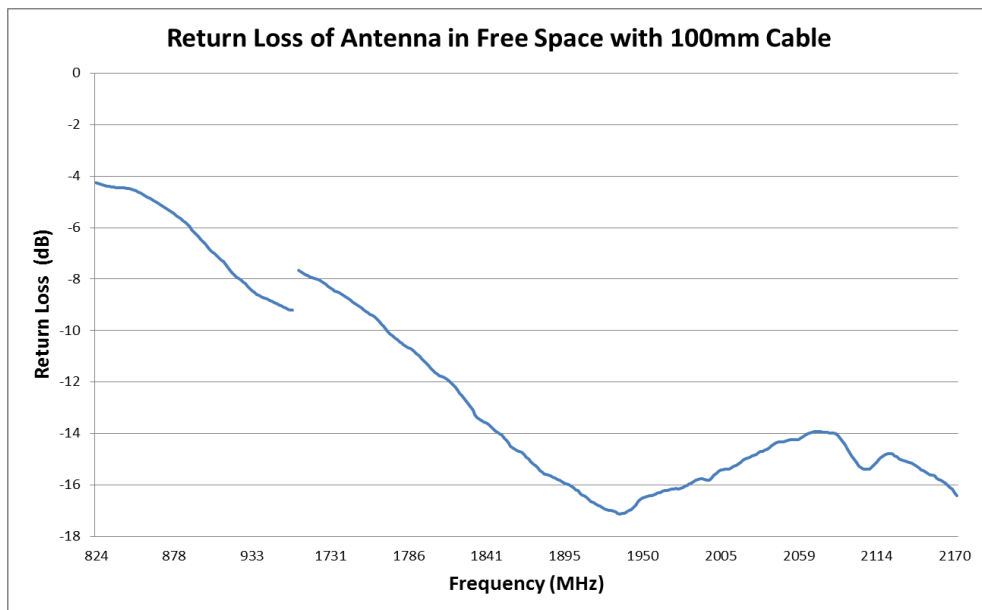


FIGURE 4.3.1 RETURN LOSS OF ANTENNA IN FREE SPACE WITH 100MM CABLE

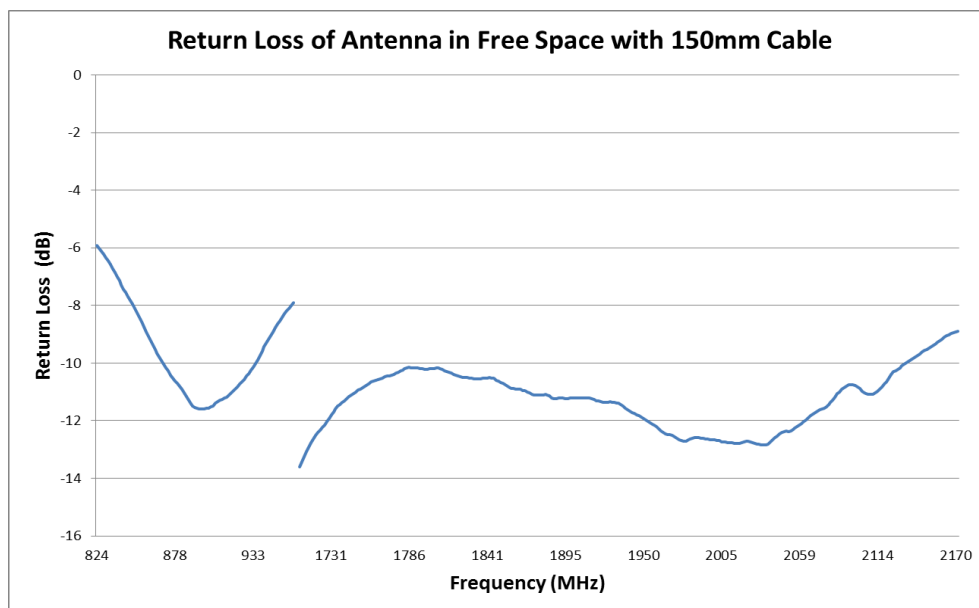


FIGURE 4.3.2 RETURN LOSS OF ANTENNA IN FREE SPACE WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 7 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

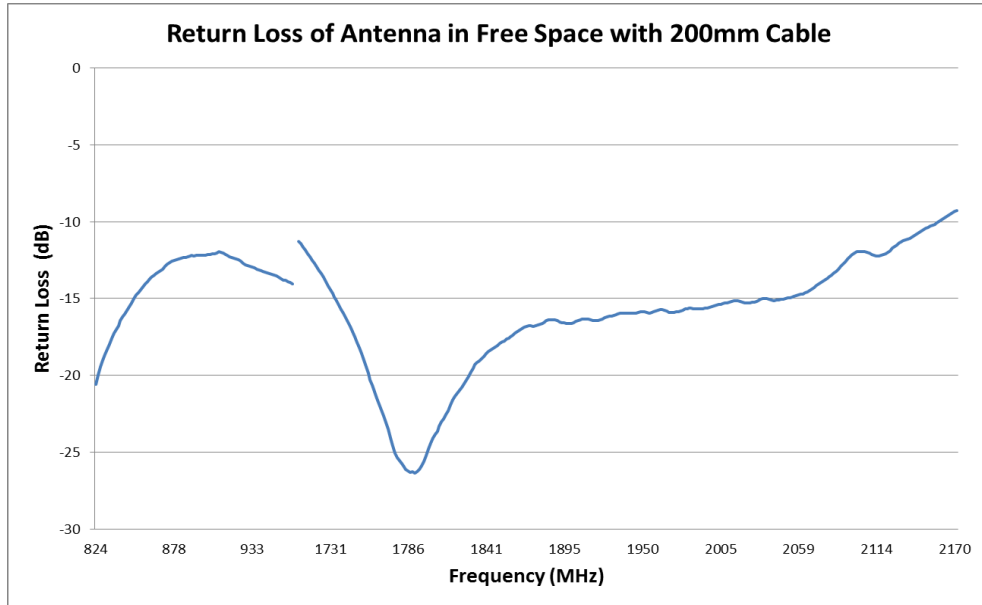


FIGURE 4.3.3 RETURN LOSS OF ANTENNA IN FREE SPACE WITH 200MM CABLE

4.4 EFFICIENCY PLOT

All measurements in this document are done with cable length of 100mm, 150mm and 200mm.

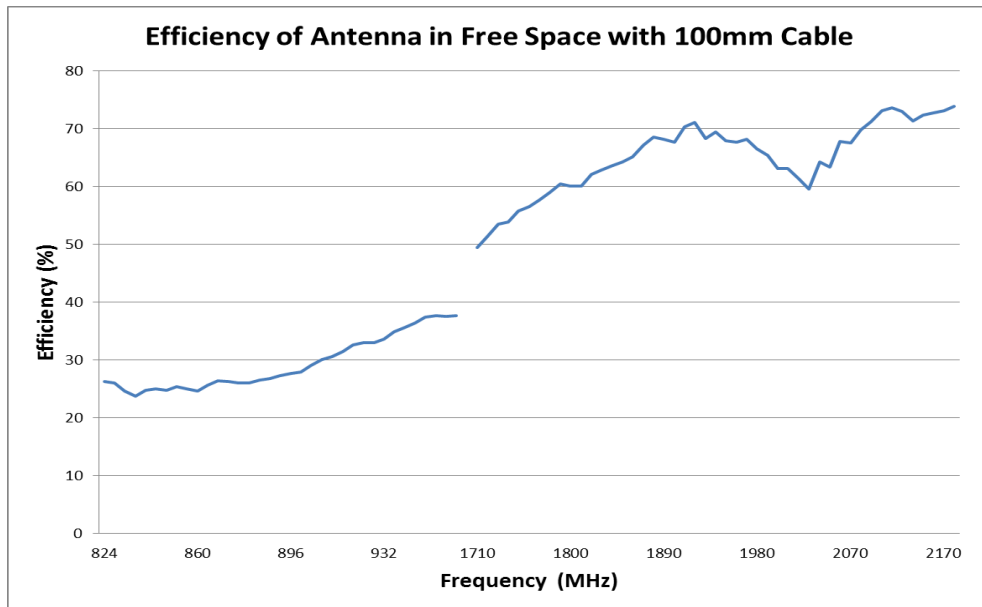


FIGURE 4.4.1 EFFICIENCY OF ANTENNA IN FREE SPACE WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 8 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

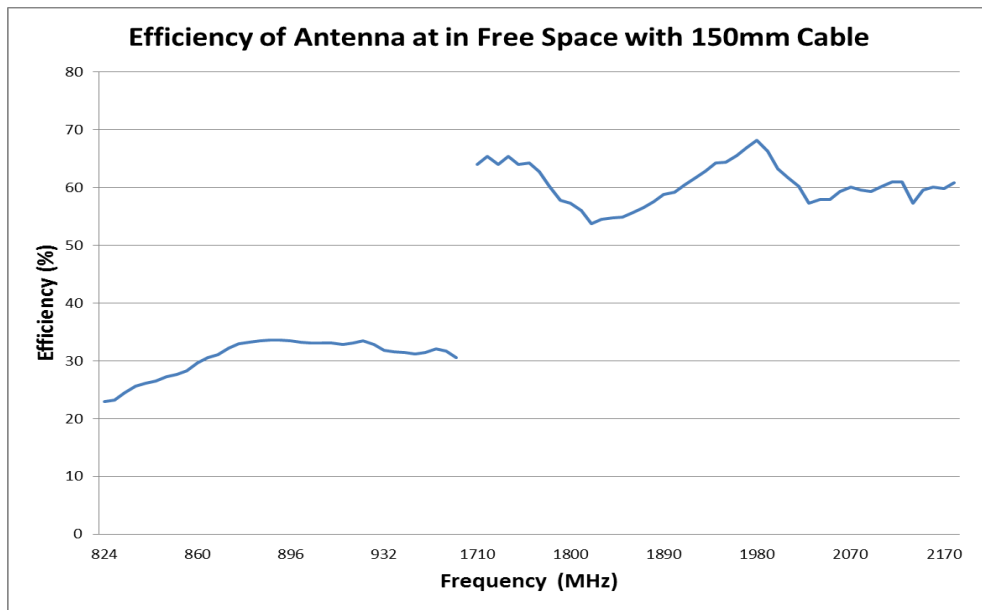


FIGURE 4.4.2 EFFICIENCY OF ANTENNA IN FREE SPACE WITH 150MM CABLE

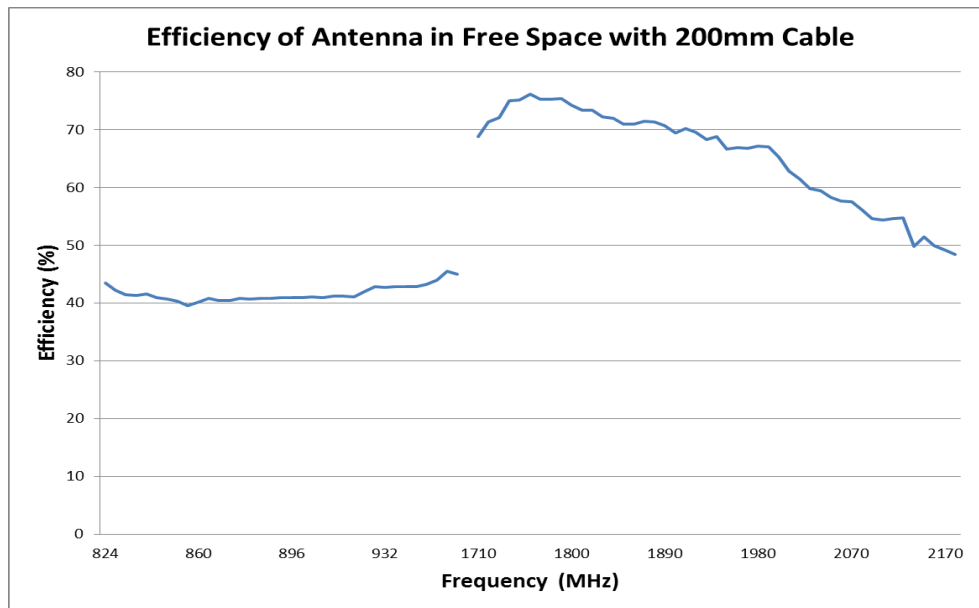


FIGURE 4.4.3 EFFICIENCY OF ANTENNA IN FREE SPACE WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 9 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

4.5 2D RADIATION PATTERN

All measurements in this document are done with cable length of 100mm, 150mm and 200mm.

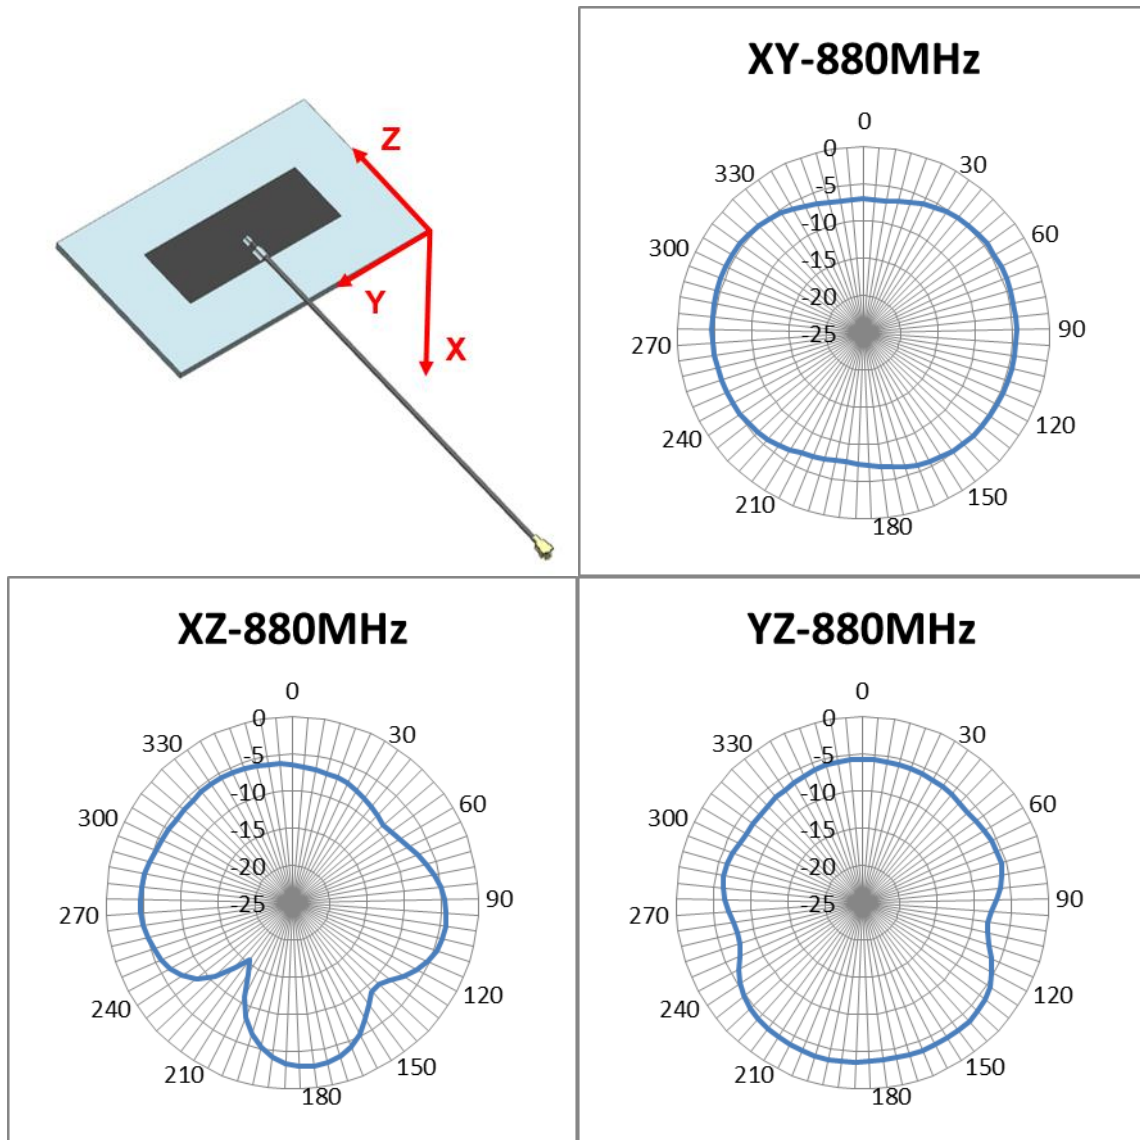


FIGURE 4.5.1 2D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 10 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

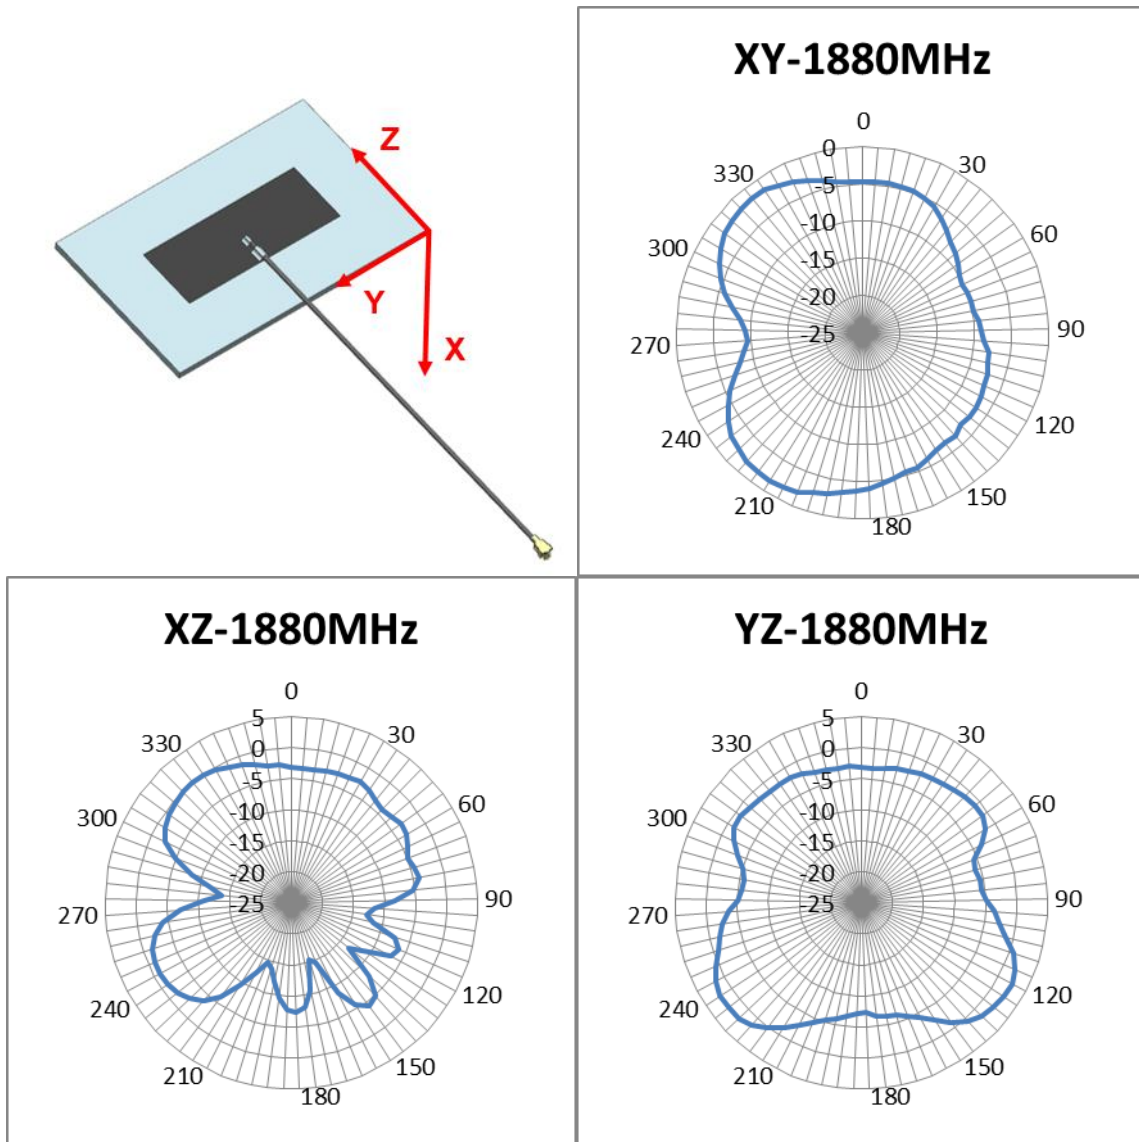


FIGURE 4.5.2 2D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 11 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

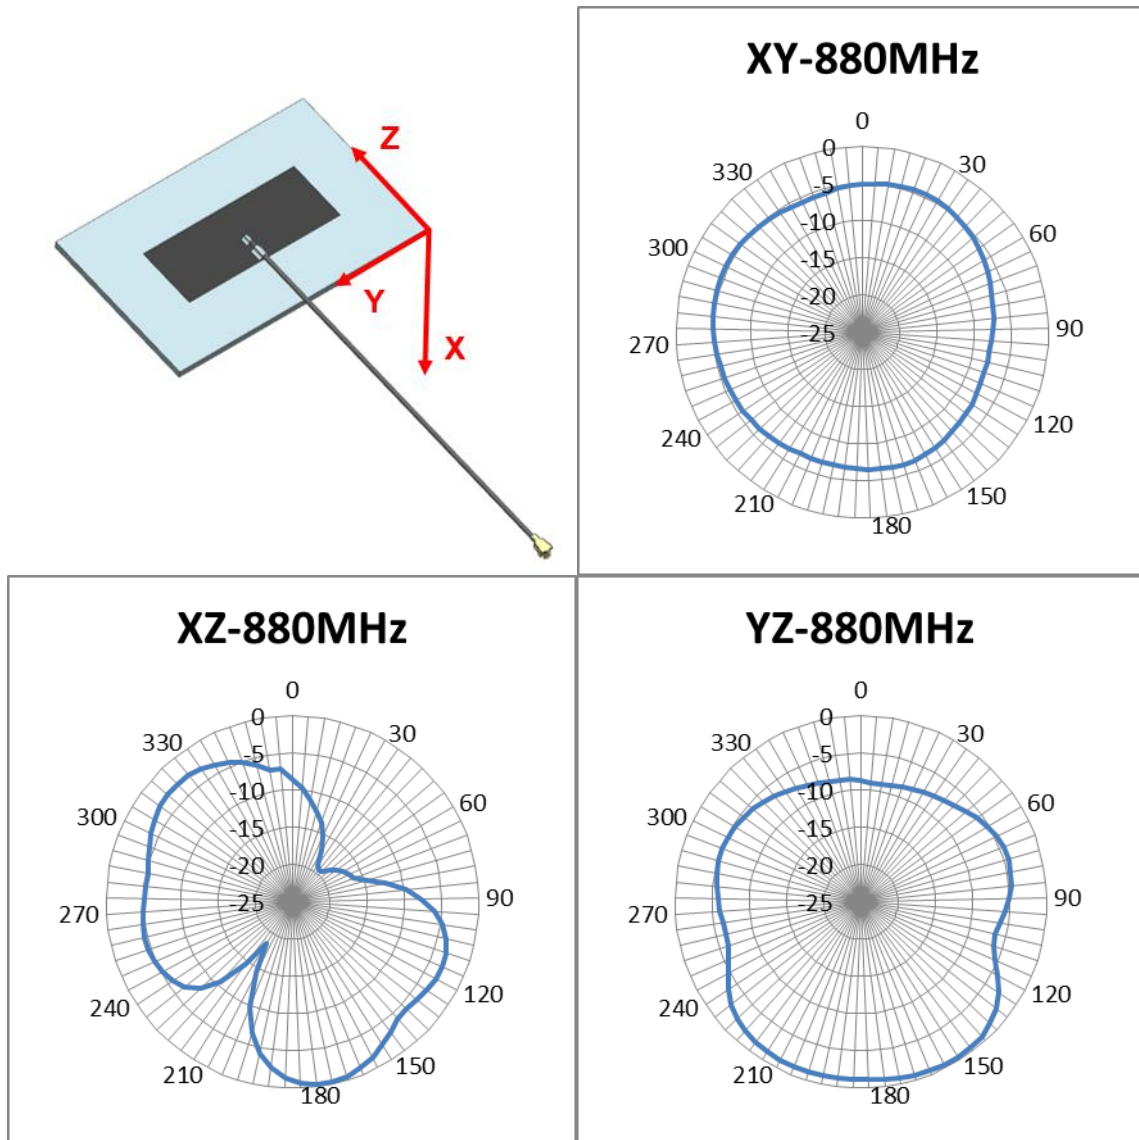


FIGURE 4.5.3 2D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 12 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

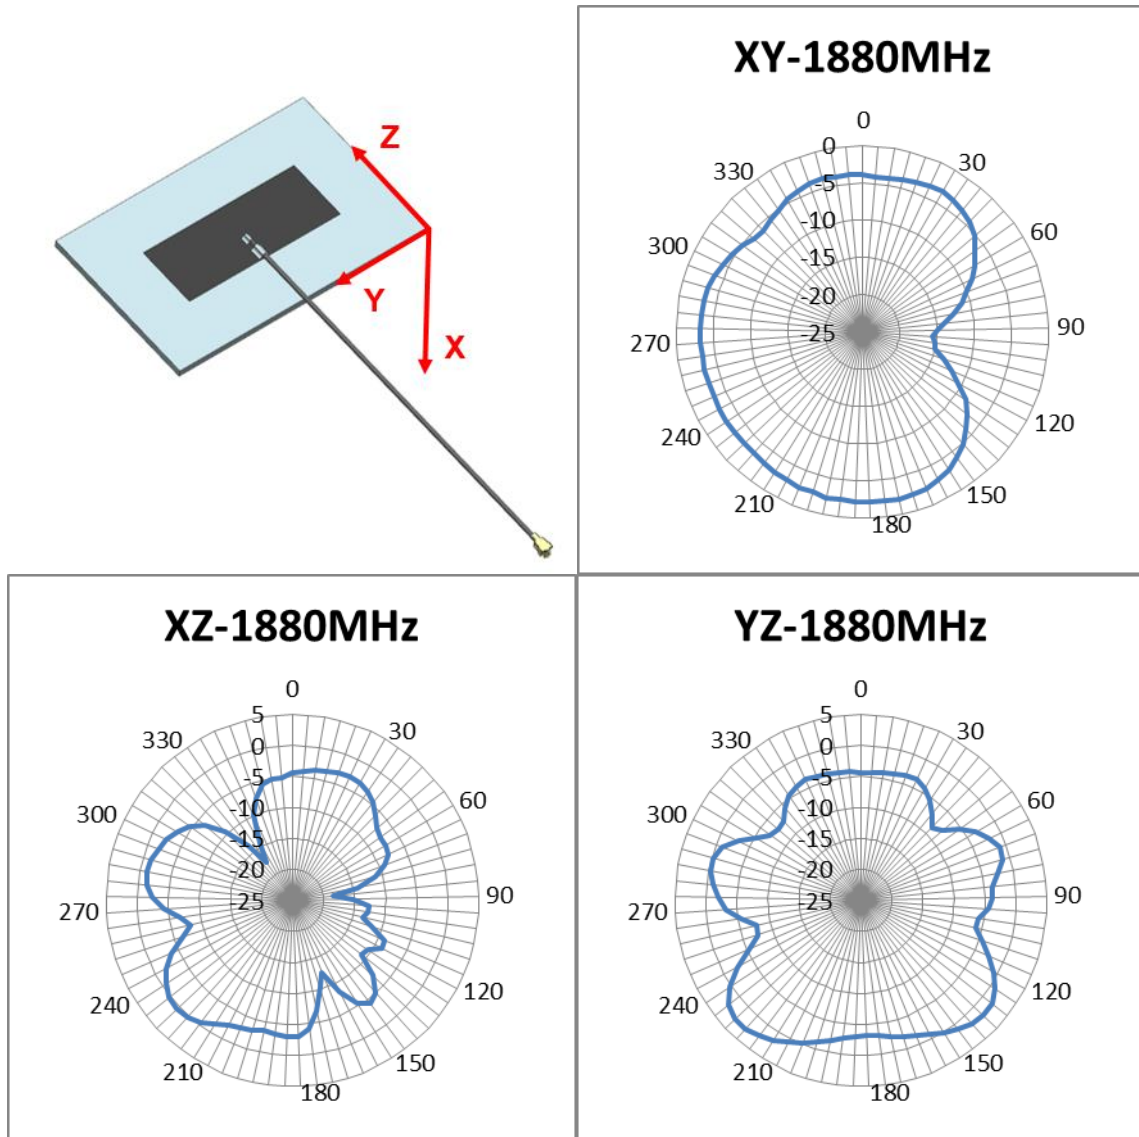


FIGURE 4.5.4 2D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 13 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

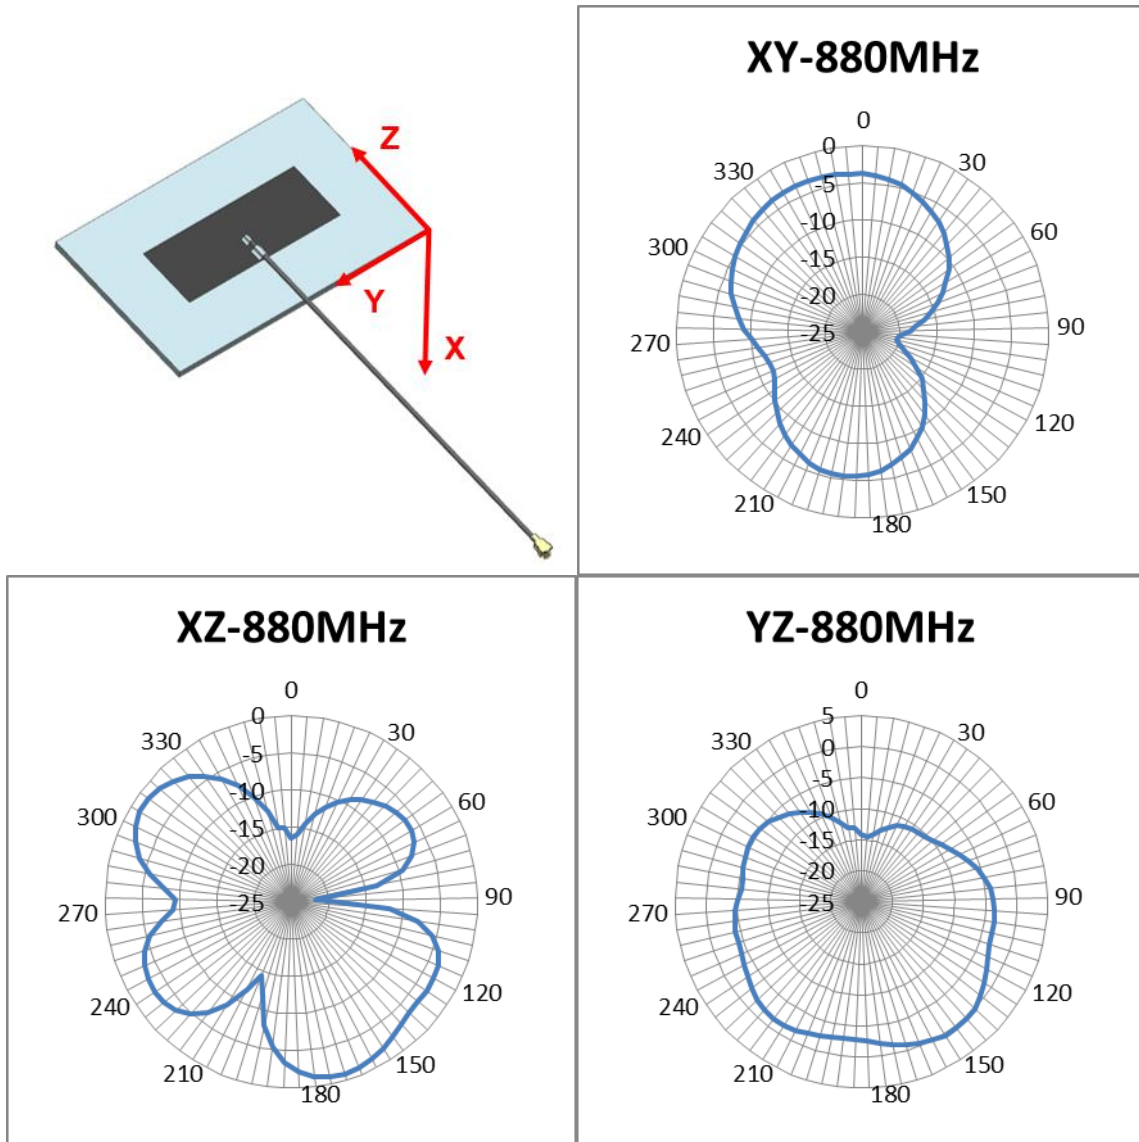


FIGURE 4.5.5 2D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 14 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

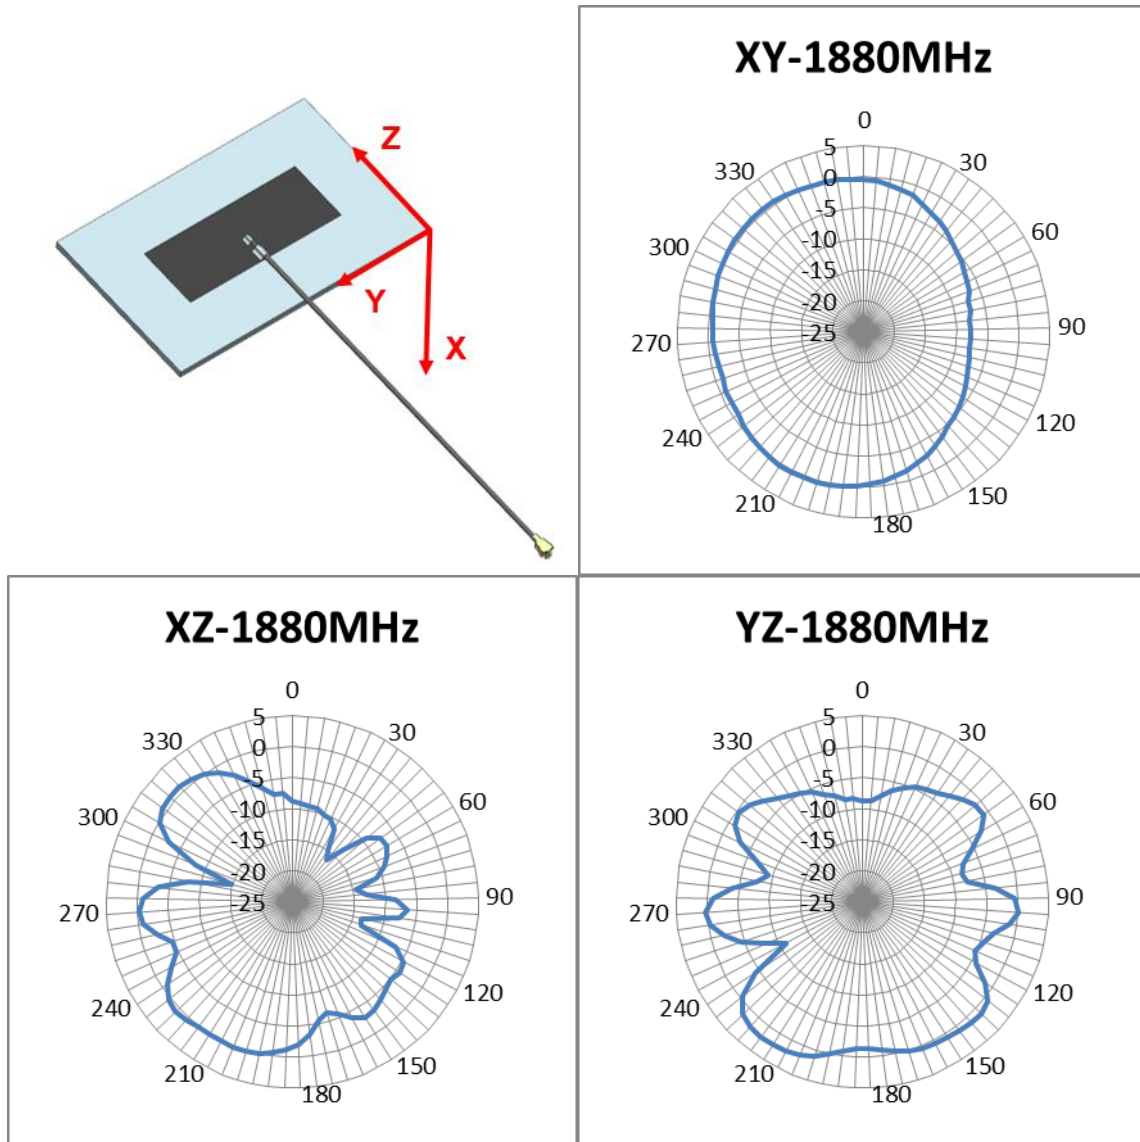


FIGURE 4.5.6 2D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 15 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

4.6 3D RADIATION PATTERN

All measurements in this document are done with cable length of 100mm, 150mm and 200mm.

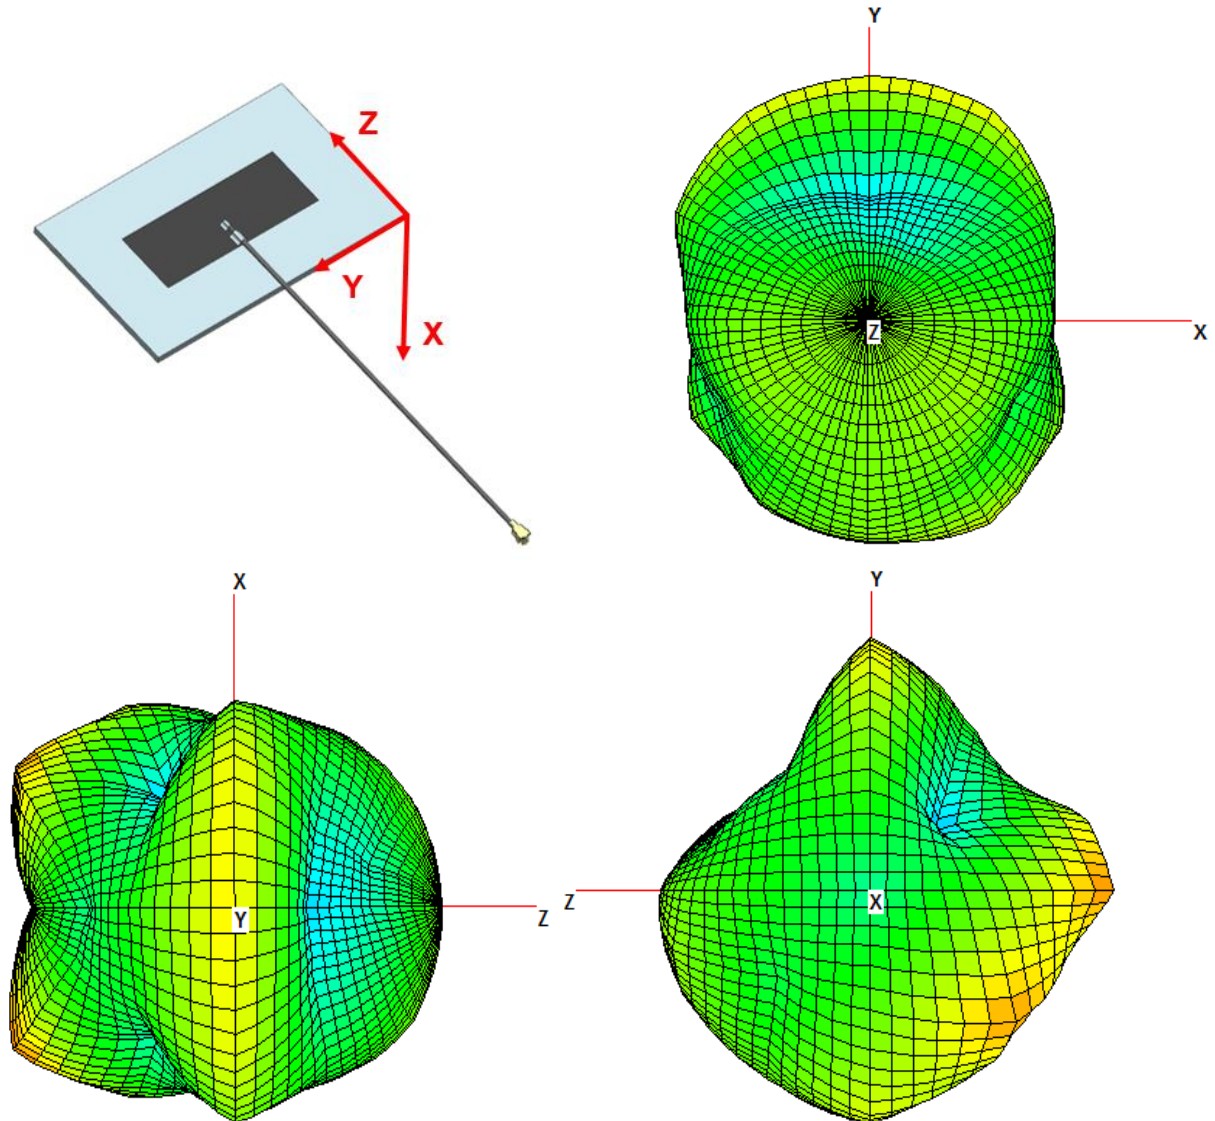


FIGURE 4.6.1 3D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 16 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

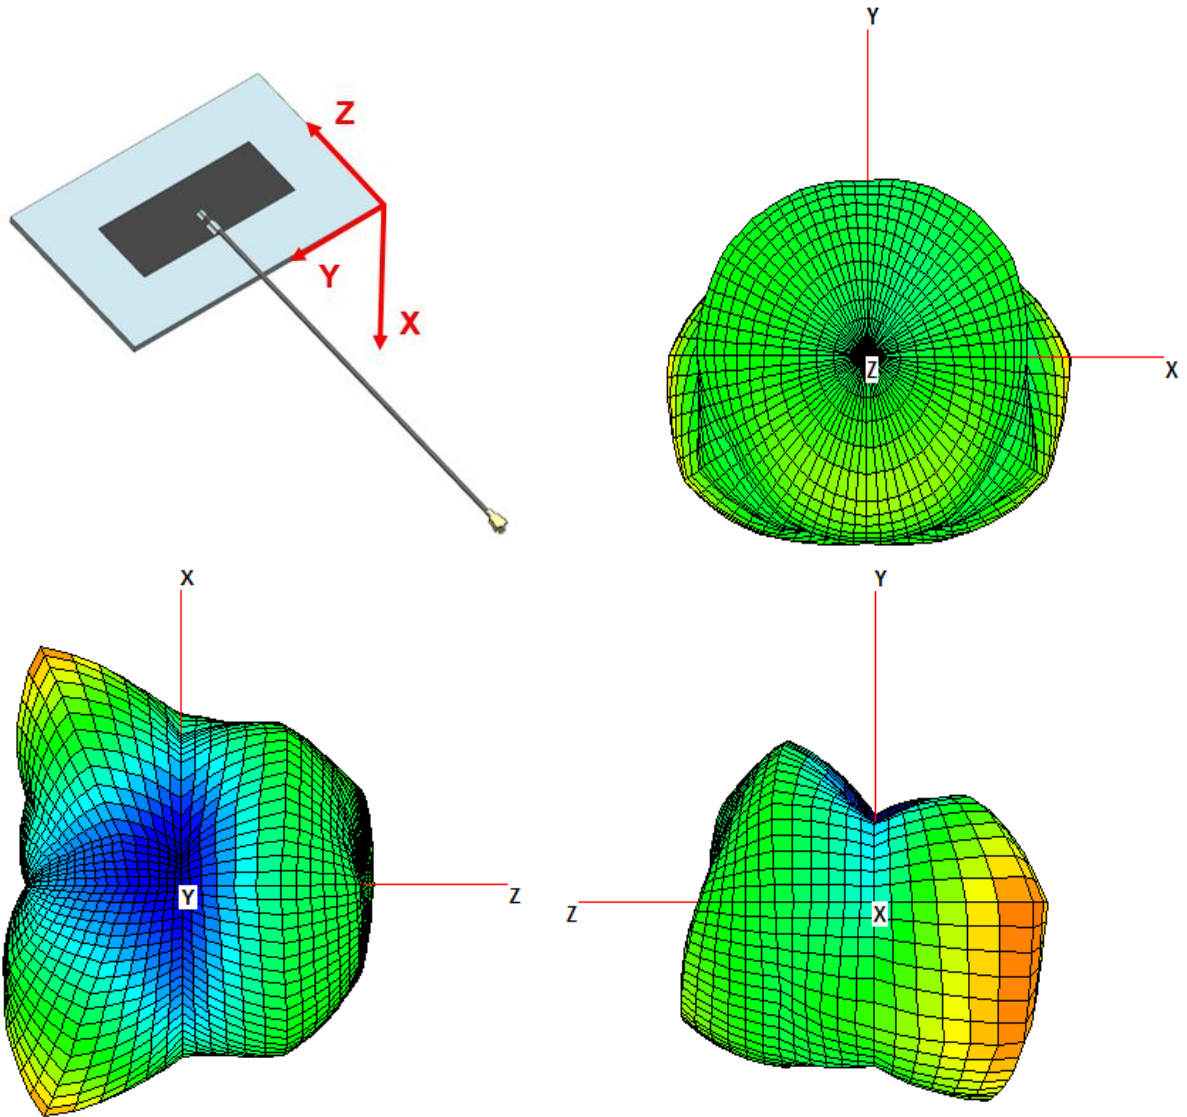


FIGURE 4.6.2 3D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 17 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

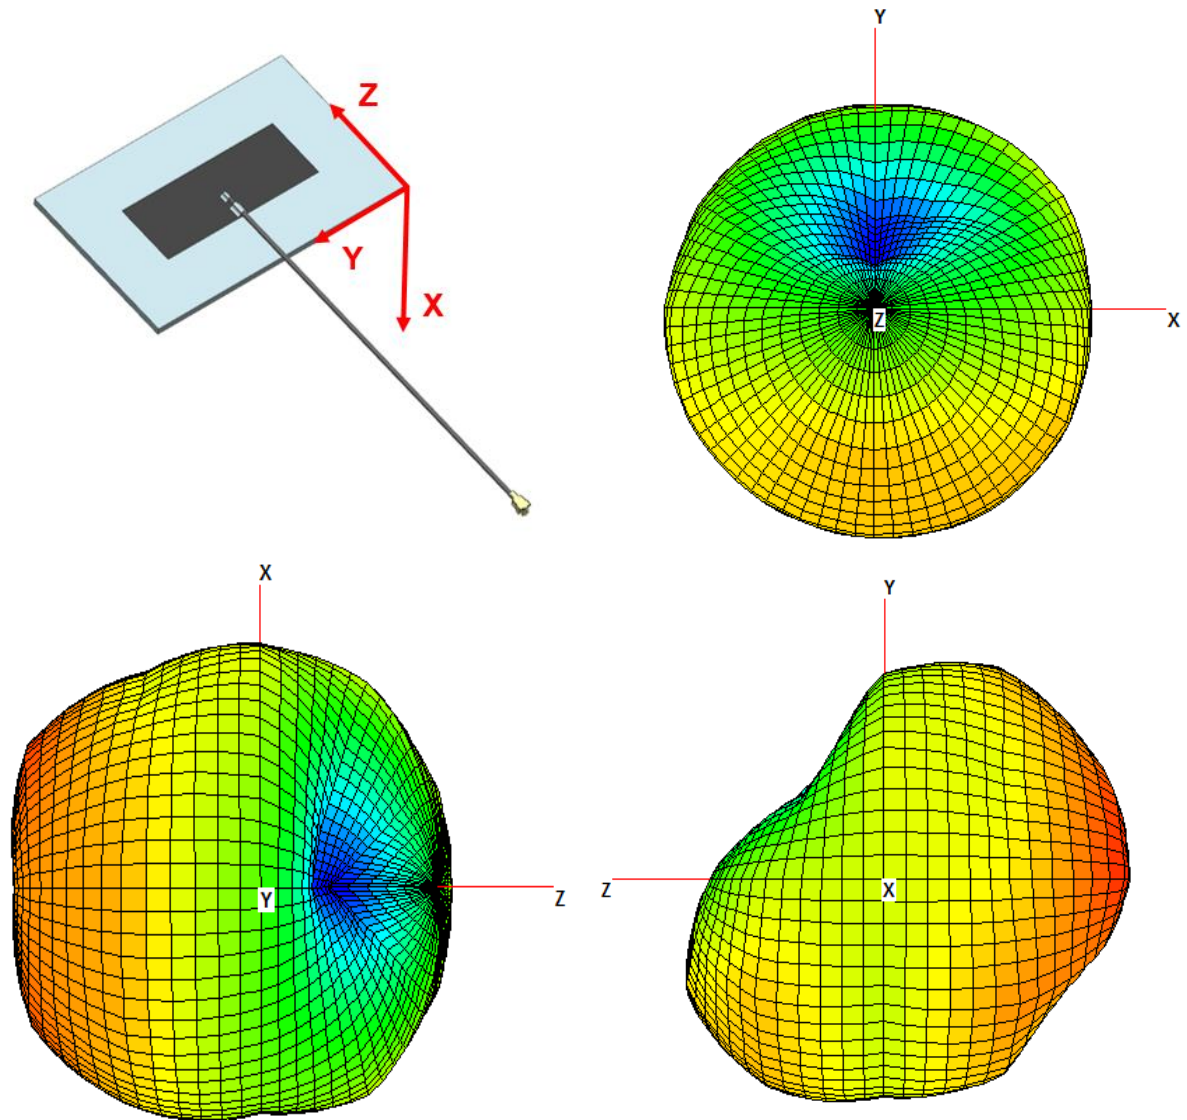


FIGURE 4.6.3 3D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 18 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

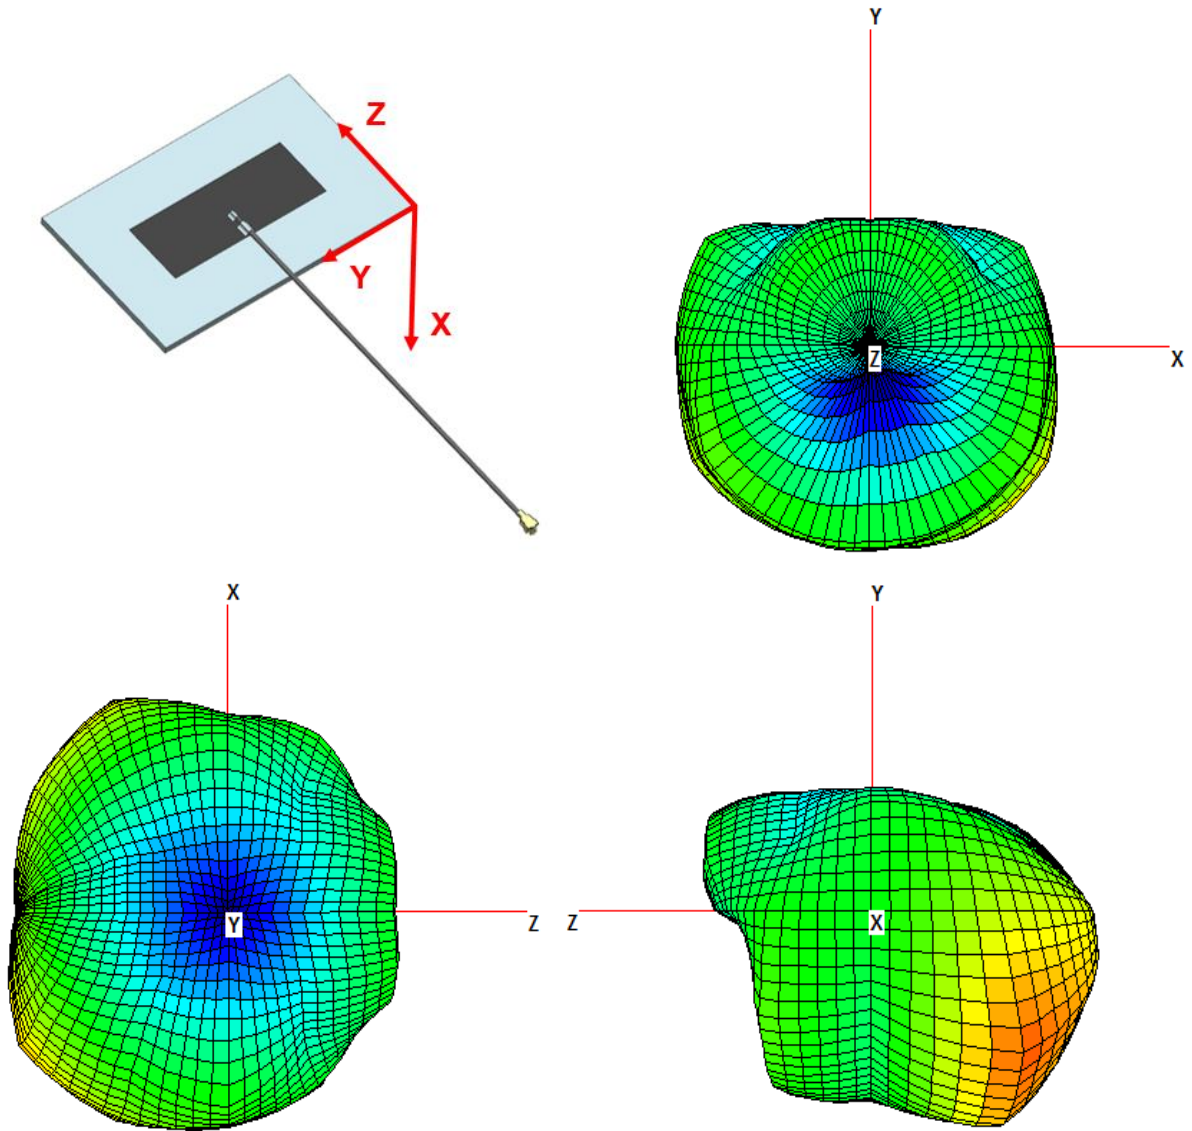


FIGURE 4.6.4 3D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 19 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

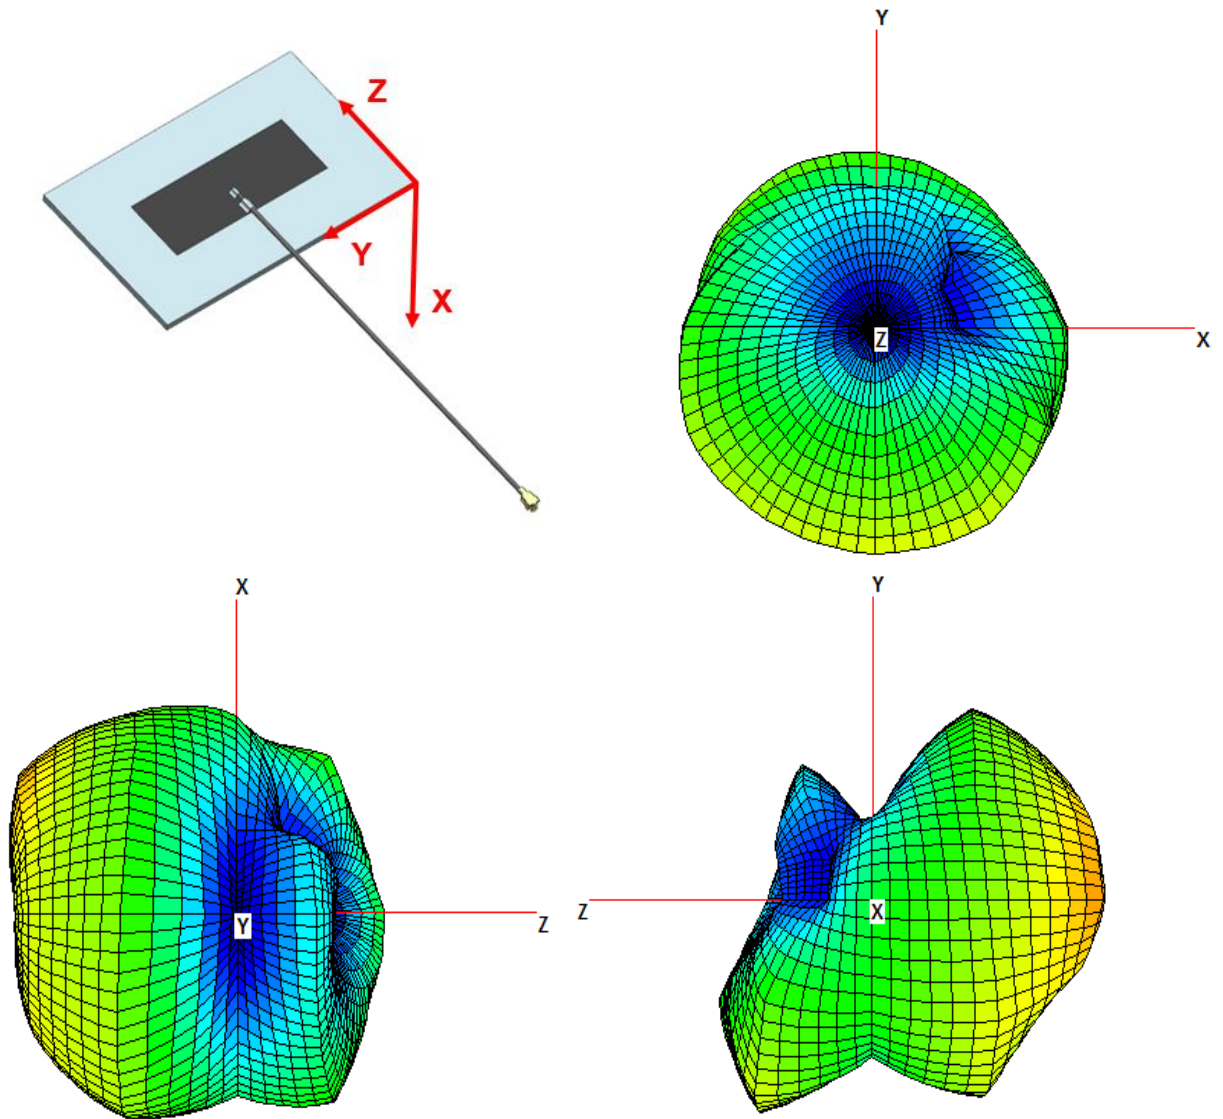


FIGURE 4.6.5 3D RADIATION PATTERN OF ANTENNA AT 880MHZ IN FREE SPACE WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 20 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

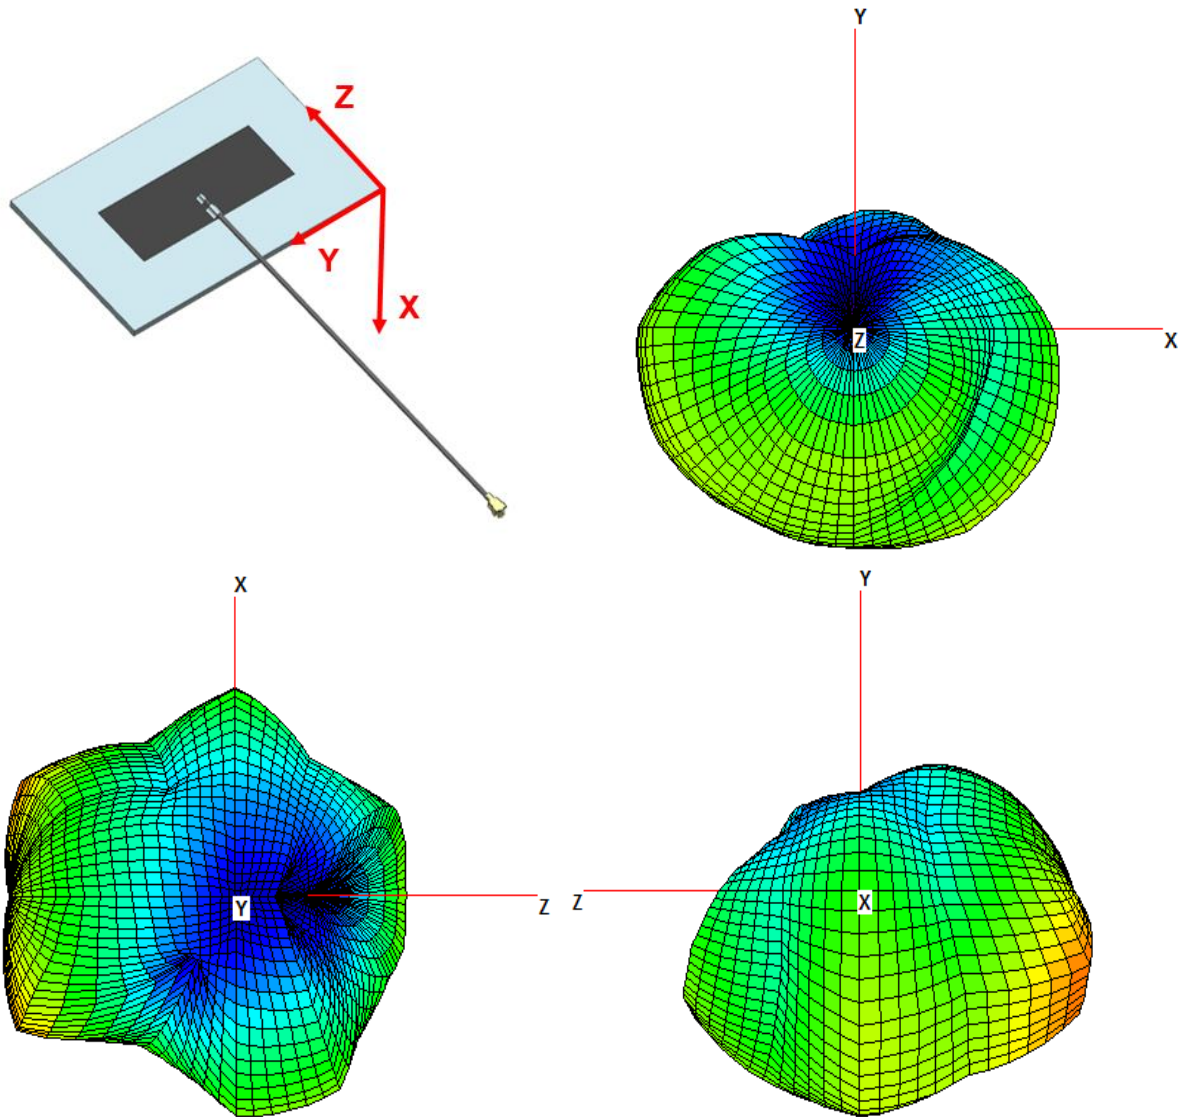


FIGURE 4.6.6 3D RADIATION PATTERN OF ANTENNA AT 1880MHZ IN FREE SPACE WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 21 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

5.0 ASSEMBLY GUIDELINE

The flex antenna comes with an adhesive 3M 9077 for assemble onto the plastic wall of the system. The surface should be smooth with $Ra < 1.6\mu m$, and need to clean the surface before sticking this product. The antenna cannot be placed on a metallic surface.



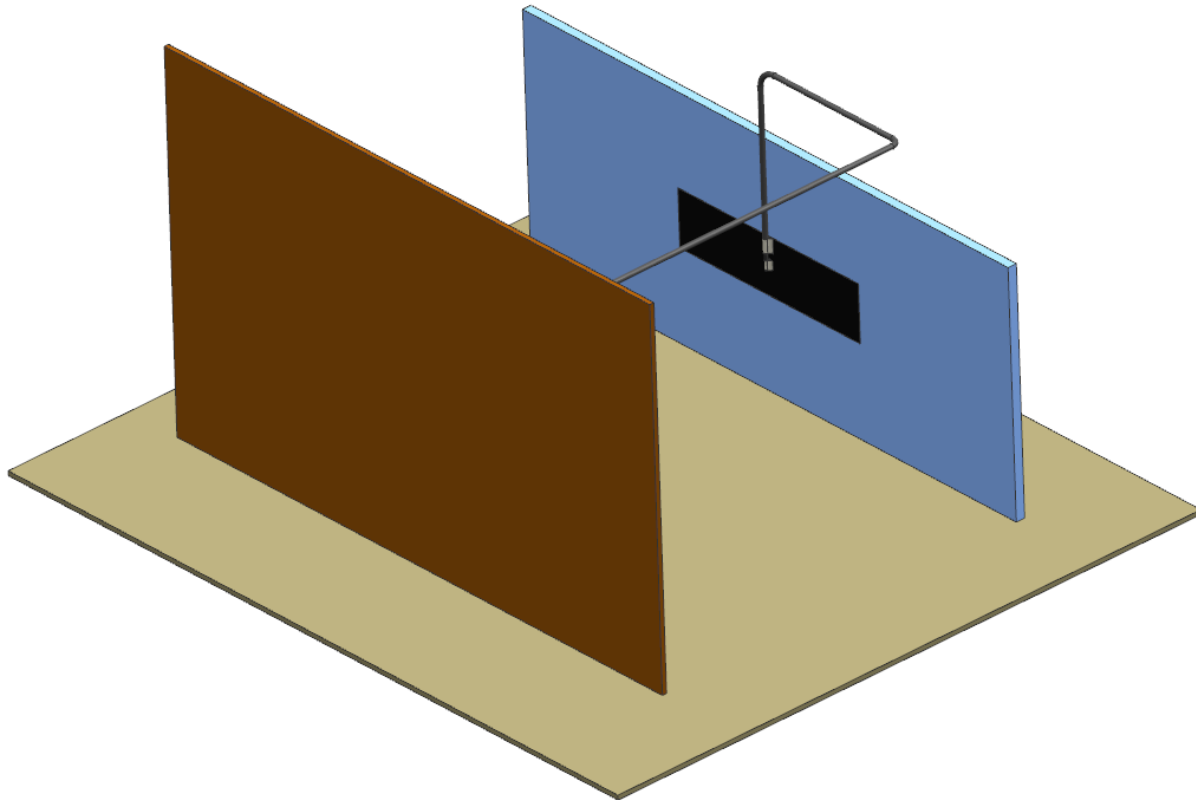


FIGURE 5.1 ASSEMBLY GUIDELINE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 22 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

During the assembly of the antenna in a device, the cable needs to be positioned away from the antenna flex to achieve best performance. The cable must be away from the pattern at least 5mm as shown in figure 5.2. If the cable crosses into the antenna flex, the antenna performance will be degraded.

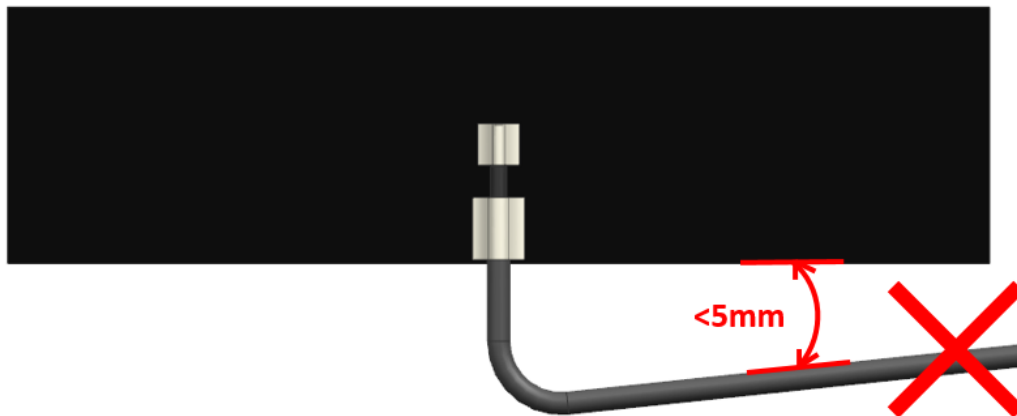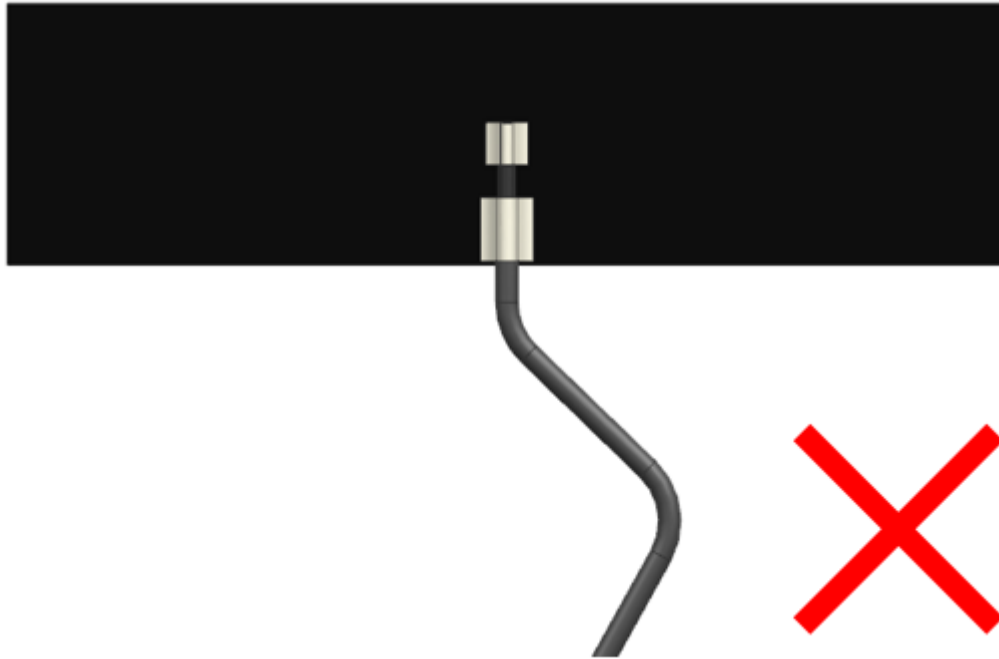

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 23 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

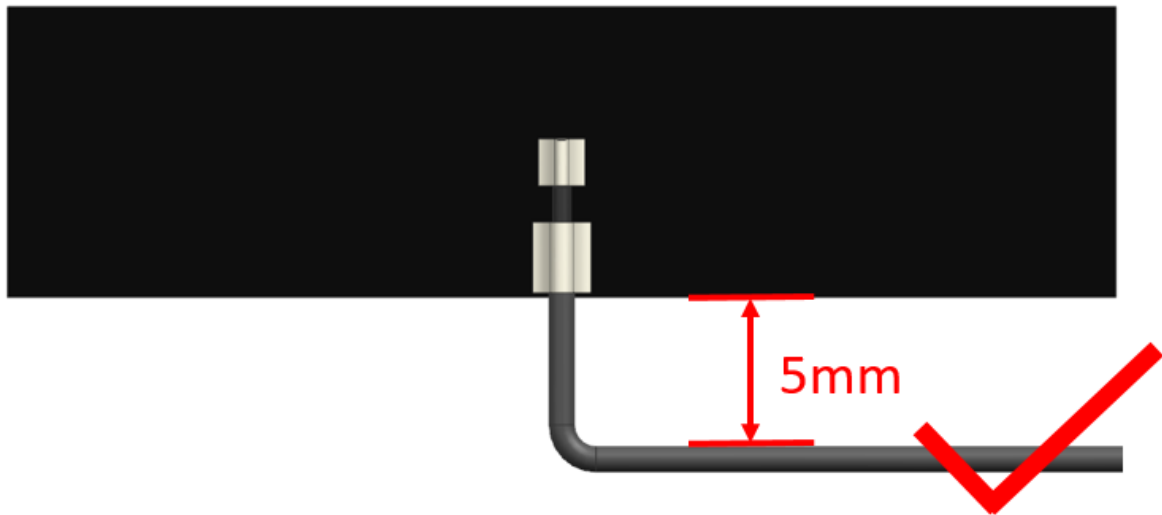


FIGURE 5.2 CABLE BENDING

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 24 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

6.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

6.1 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH PARALLEL PLANE GROUND

Four locations with parallel plane ground have been evaluated and these locations are shown in figure 6.1. The plane ground size is 90mm*90mm and we move the plane ground to four locations for each test. The antenna performance is better with larger distance between antenna and parallel plane ground at high band. The minimum distance between antenna and plane ground is recommended to be 15mm to achieve acceptable RF performance.

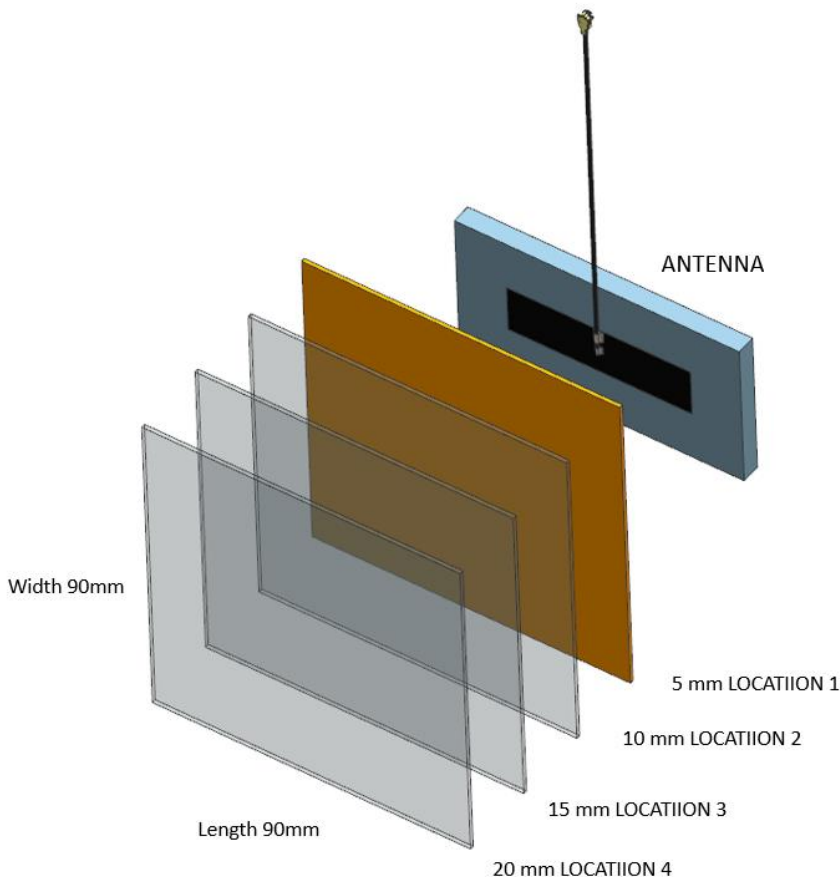


FIGURE 6.1 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

Ground Size: 90mm*90mm;
 Location 1: Distance between antenna and plane ground is about 5mm;
 Location 2: Distance between antenna and plane ground is about 10mm;
 Location 3: Distance between antenna and plane ground is about 15mm;
 Location 4: Distance between antenna and plane ground is about 20mm.

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 25 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

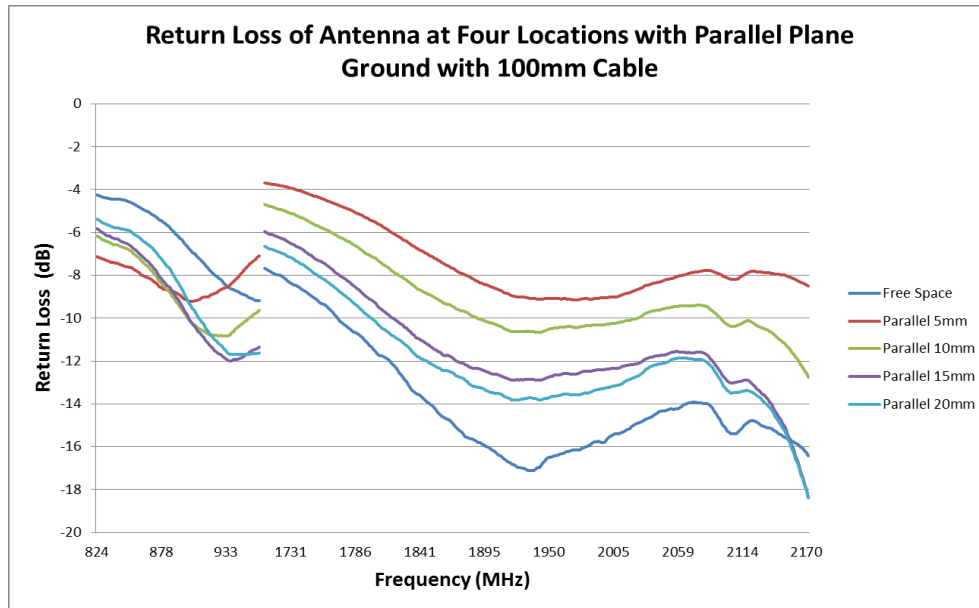


FIGURE 6.1.1 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 100MM CABLE

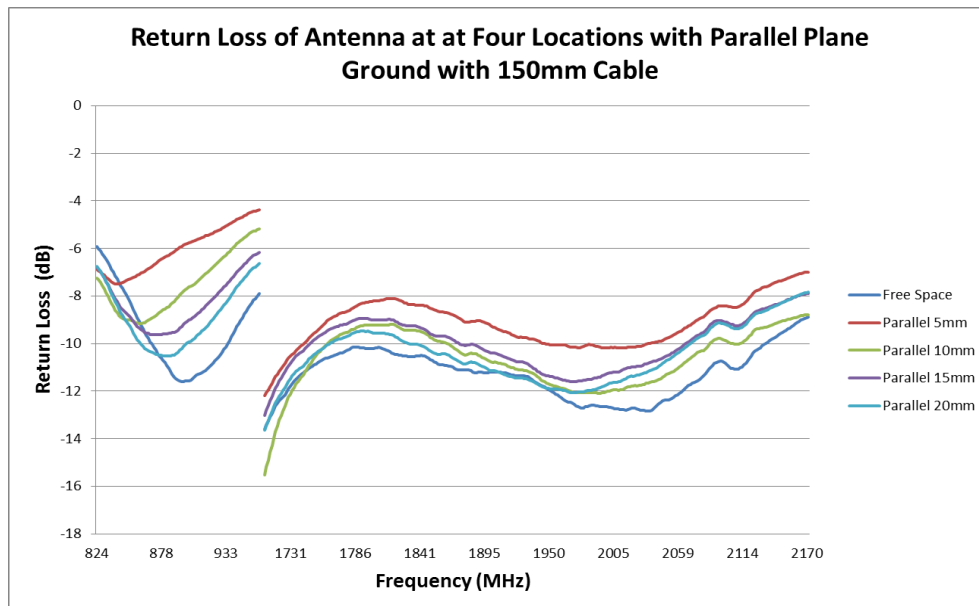


FIGURE 6.1.2 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 26 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

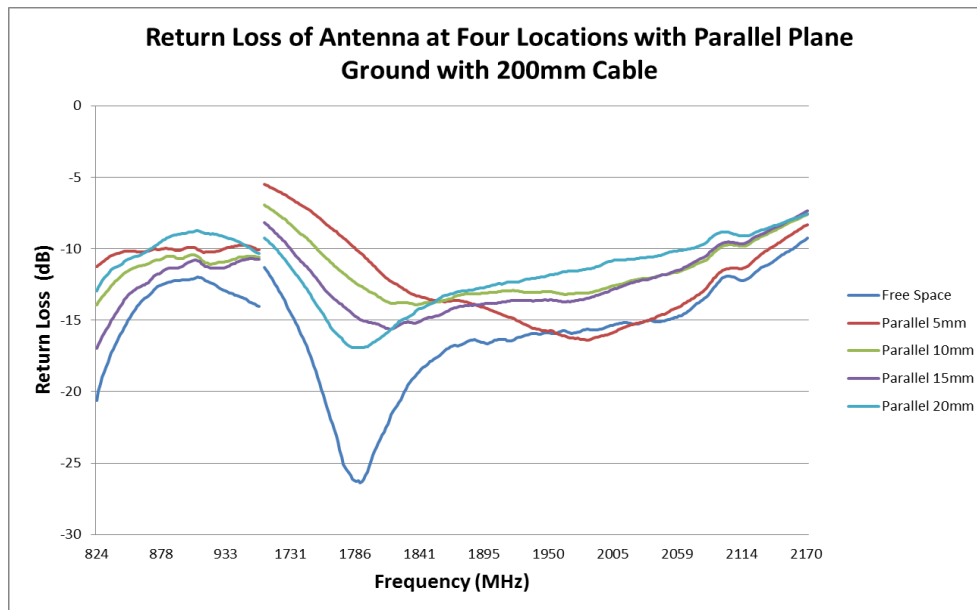


FIGURE 6.1.3 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 200MM CABLE

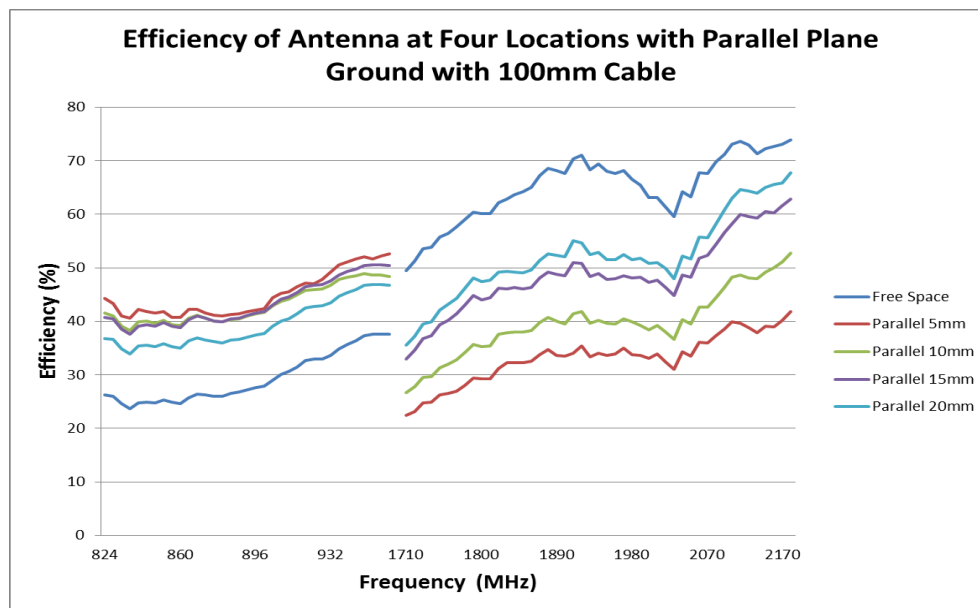


FIGURE 6.1.4 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 27 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

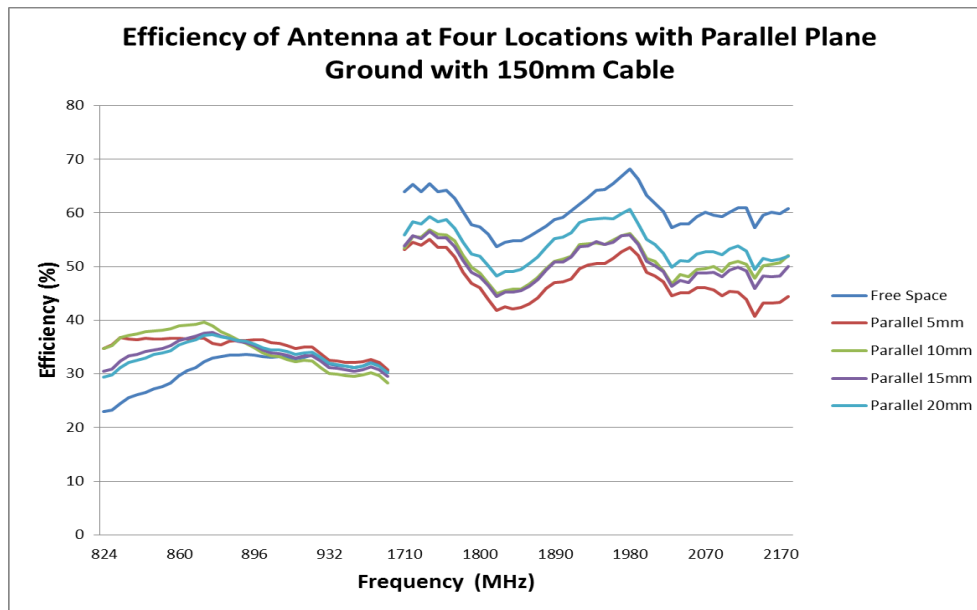


FIGURE 6.1.5 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 150MM CABLE

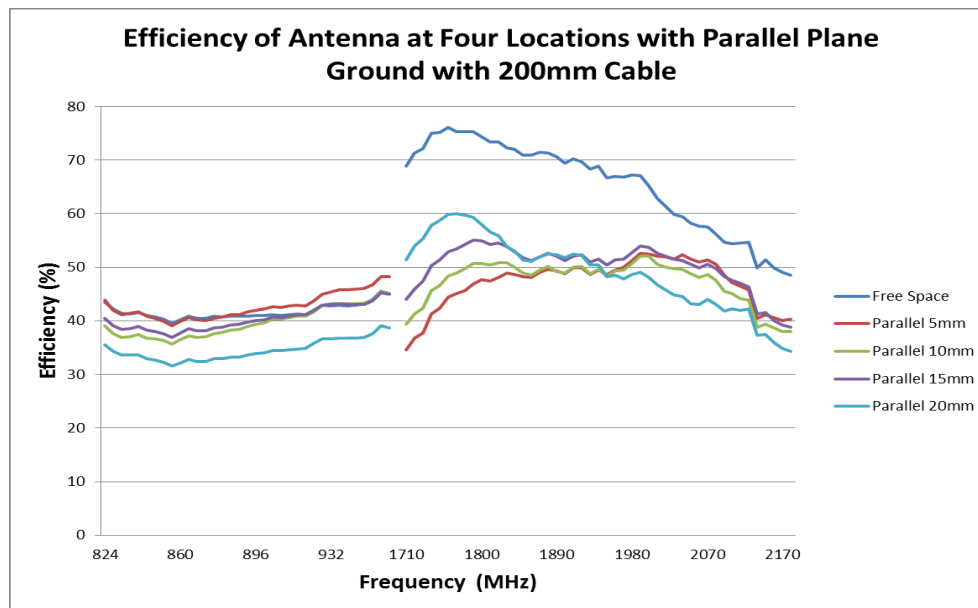


FIGURE 6.1.6 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 28 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

6.2 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH VERTICAL PLANE GROUND

Four locations with vertical plane ground have been evaluated and these locations are shown in figure 6.2. The plane ground size is 90mm*90mm and we move the plane ground to four locations for each test. The distance between antenna and vertical plane ground affect the antenna performance slightly. We still suggest the minimum distance between antenna and plane ground is recommended to be 5mm.

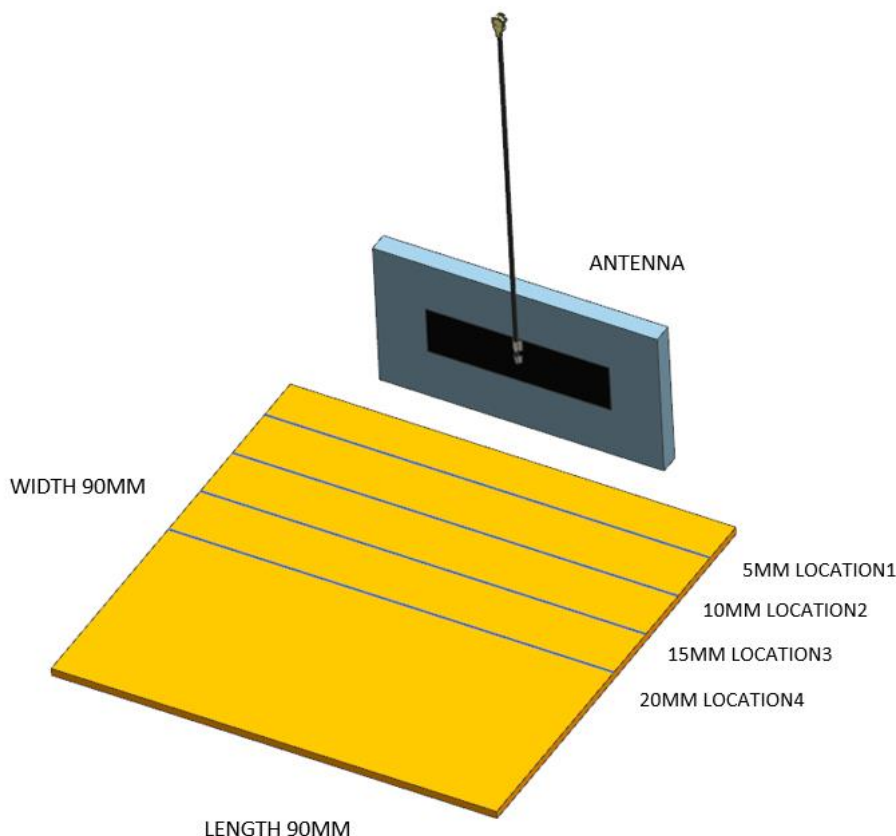


FIGURE 6.2 FOUR LOCATIONS WITH VERTICAL PLANE GROUND

Ground Size: 90mm*90mm;

Location 1: Distance between antenna and plane ground is about 5mm;

Location 2: Distance between antenna and plane ground is about 10mm;

Location 3: Distance between antenna and plane ground is about 15mm;

Location 4: Distance between antenna and plane ground is about 20mm.

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 29 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

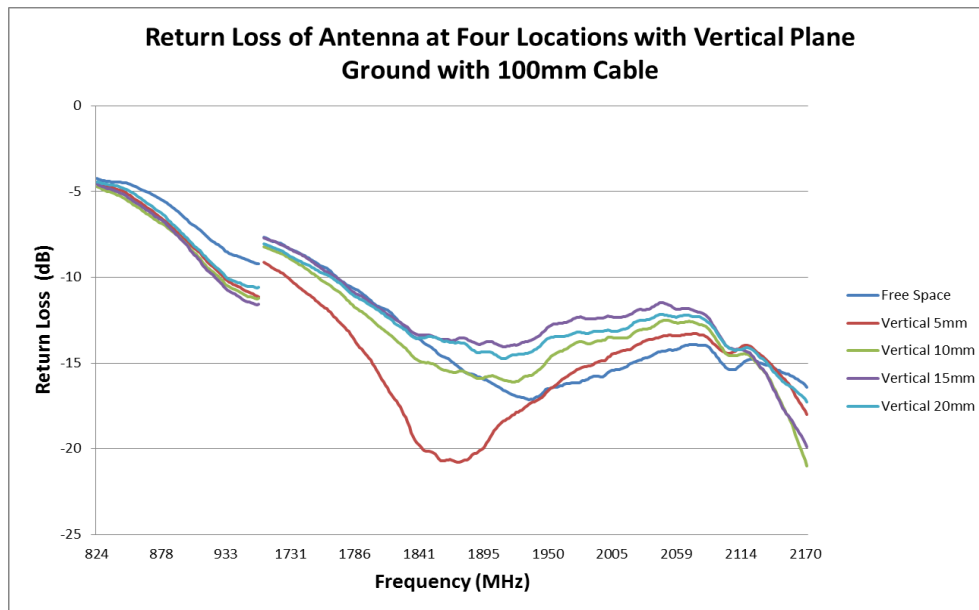


FIGURE 6.2.1 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 100MM CABLE

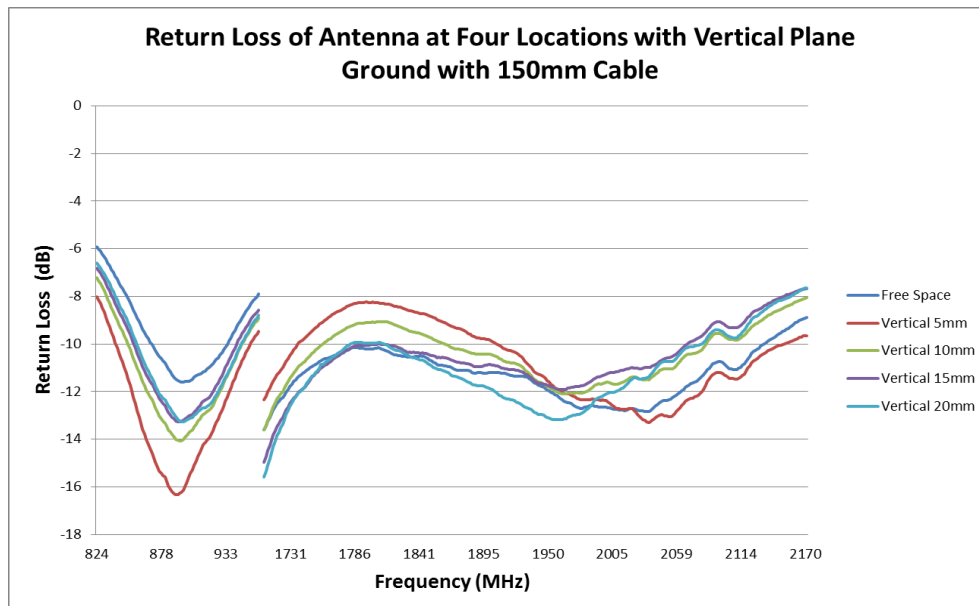


FIGURE 6.2.2 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 30 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

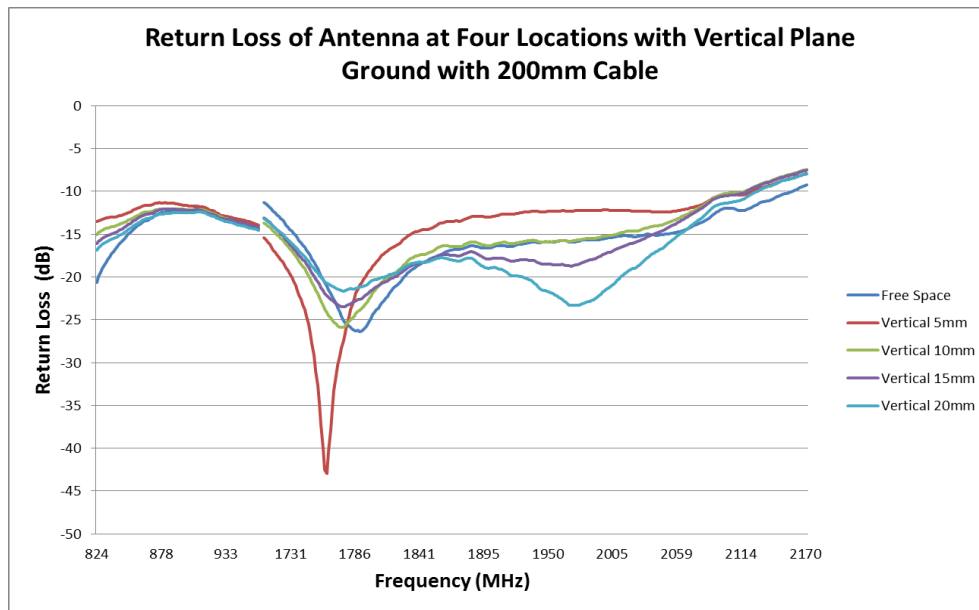


FIGURE 6.2.3 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 200MM CABLE

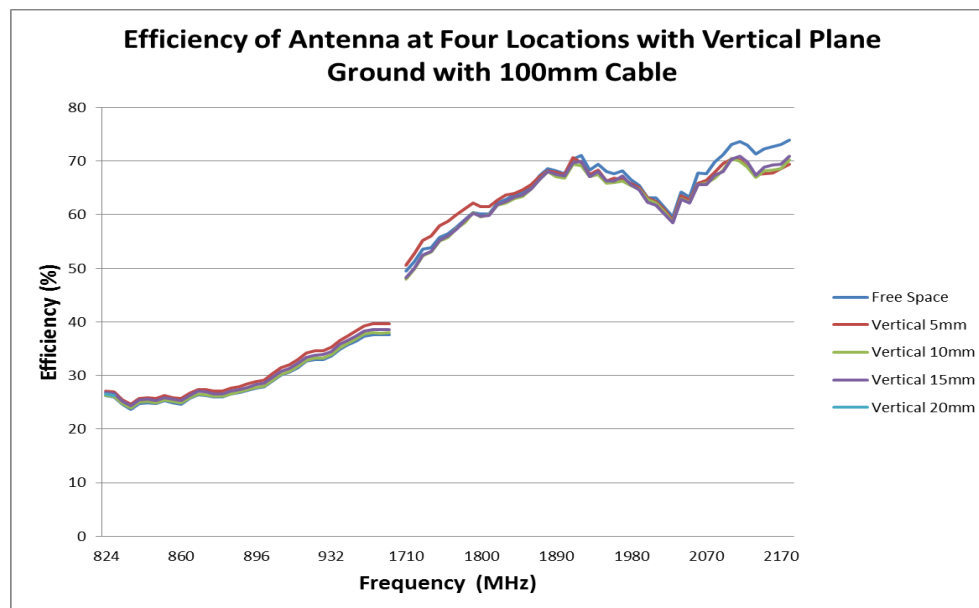


FIGURE 6.2.4 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 31 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

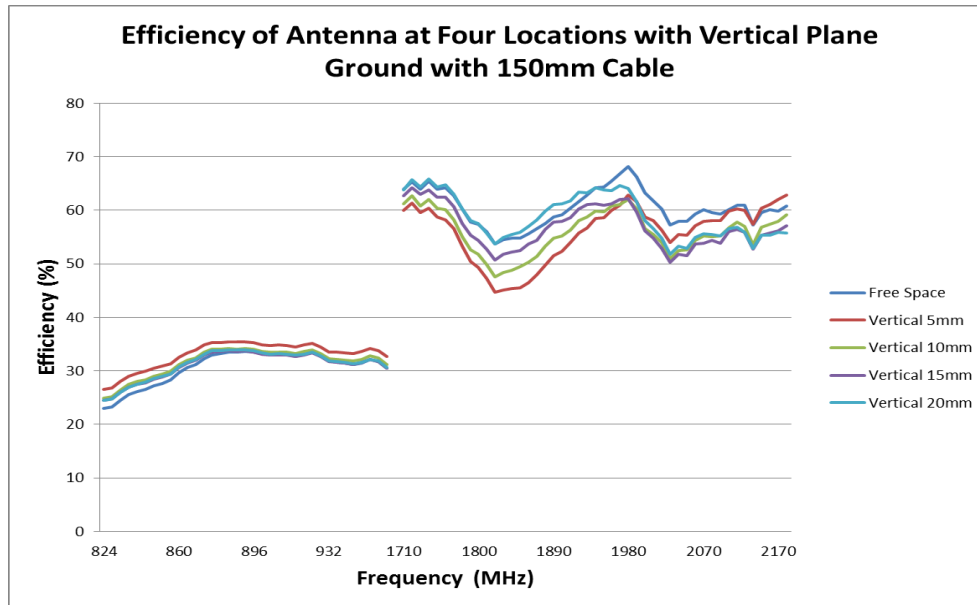


FIGURE 6.2.5 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 150MM CABLE

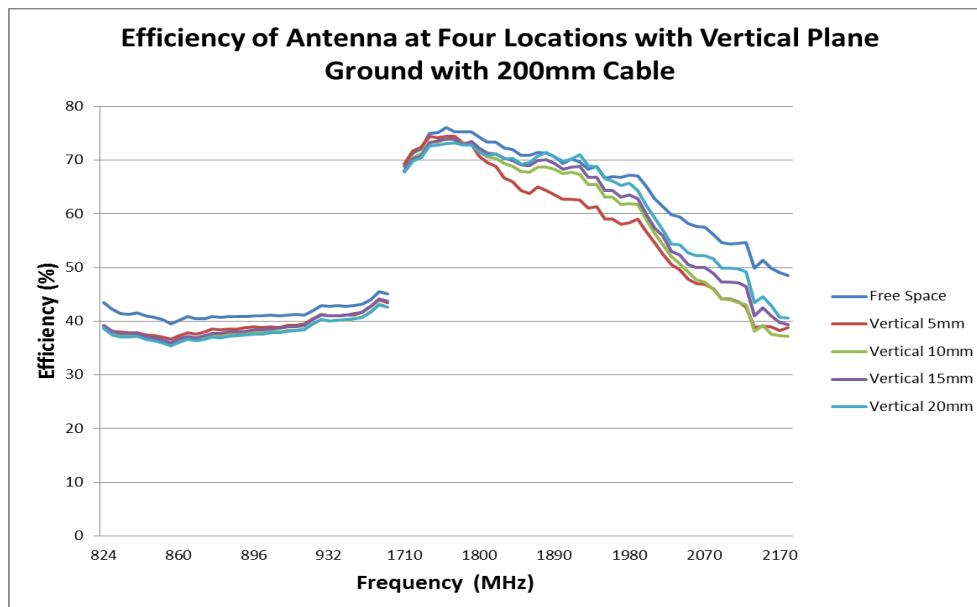


FIGURE 6.2.6 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 32 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

6.3 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT DISTANCES WITH PARALLEL PLANE GROUND

Four locations with the parallel plane ground have been evaluated and these locations are shown in figure 6.3. The plane ground size is 90mm*90mm and we move the plane ground to four locations for each test. The distance between the antenna and the parallel plane ground affect the antenna performance slightly. We still suggest the minimum distance between the antenna and the plane ground is recommended to be 5mm.

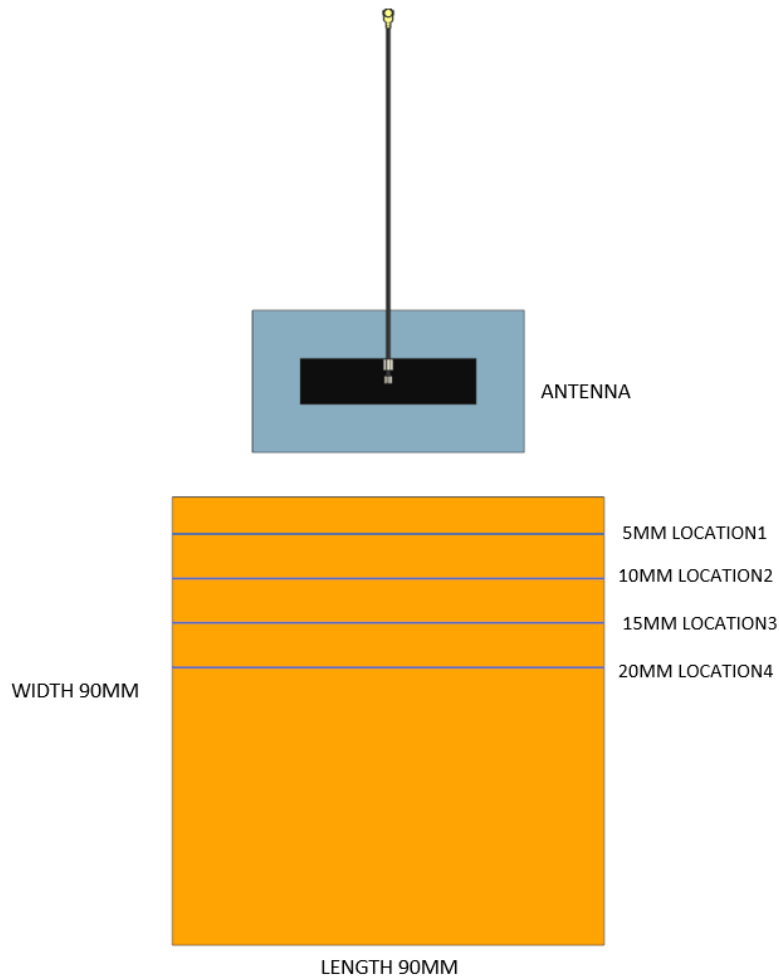


FIGURE 6.3 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

Ground Size: 90mm*90mm;

Location 1: Distance between antenna and plane ground is about 5mm;

Location 2: Distance between antenna and plane ground is about 10mm;

Location 3: Distance between antenna and plane ground is about 15mm;

Location 4: Distance between antenna and plane ground is about 20mm.

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 33 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

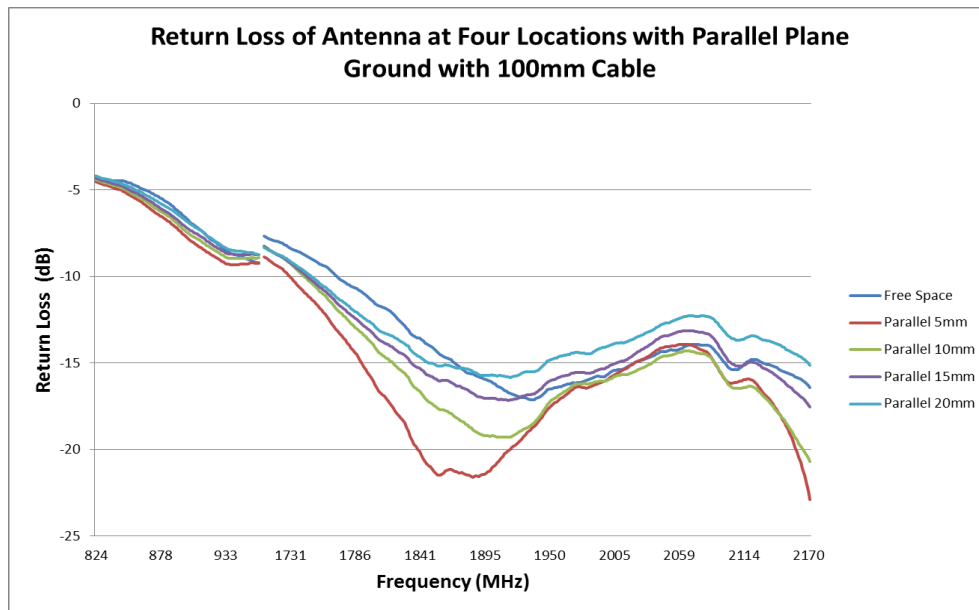


FIGURE 6.3.1 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 100MM CABLE

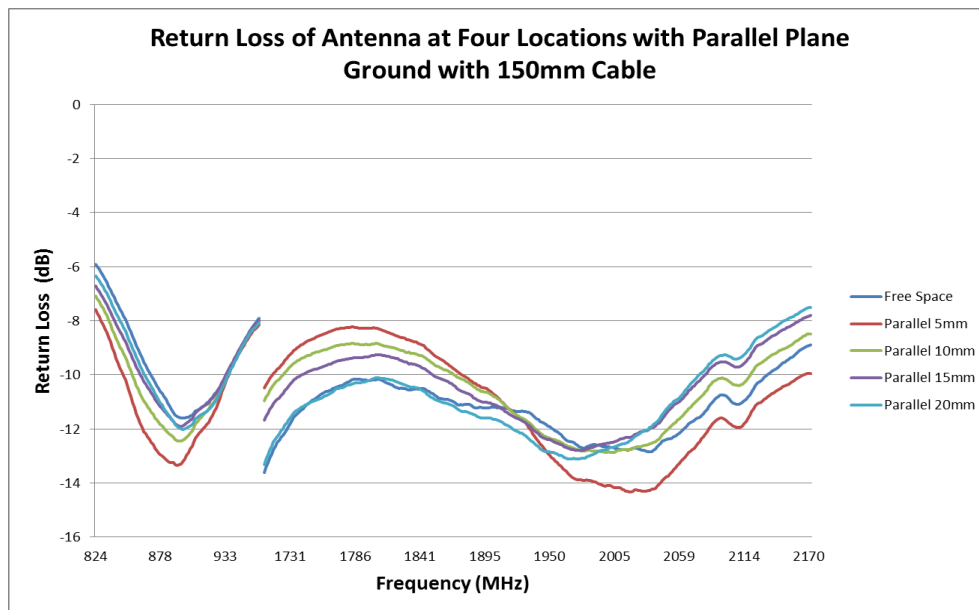


FIGURE 6.3.2 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 150MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 34 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

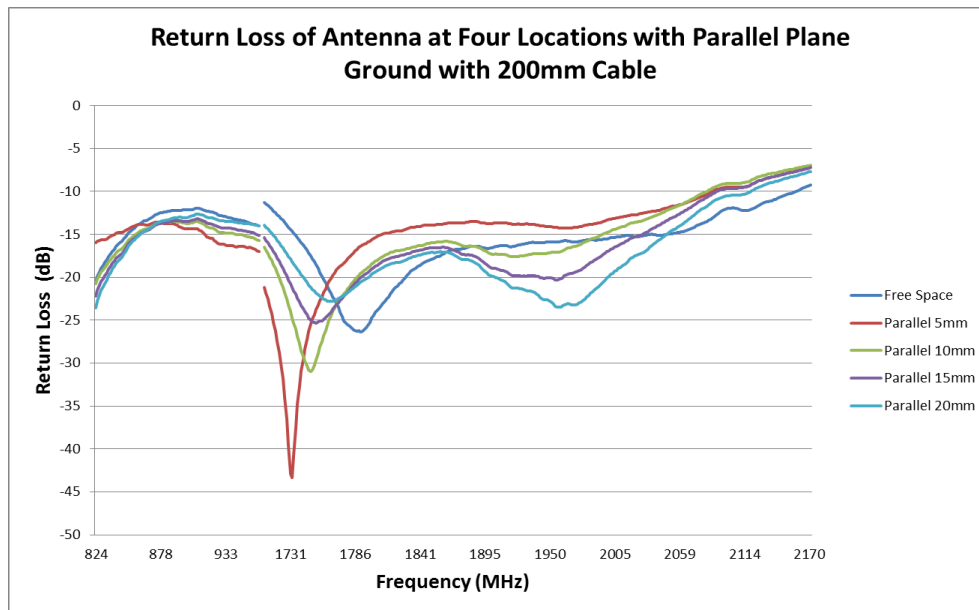


FIGURE 6.3.3 RETURN LOSS OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 200MM CABLE

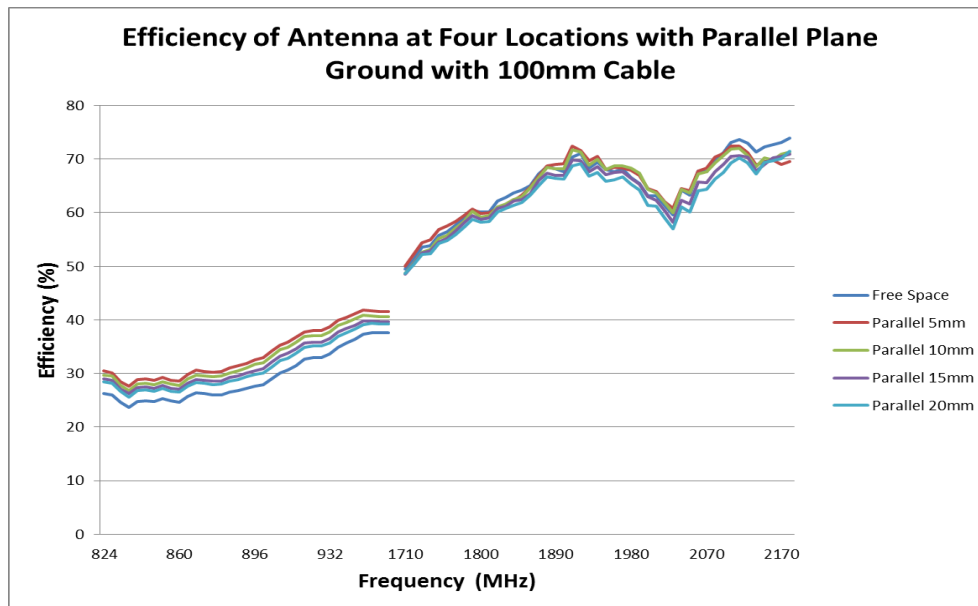


FIGURE 6.3.4 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 100MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 35 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09

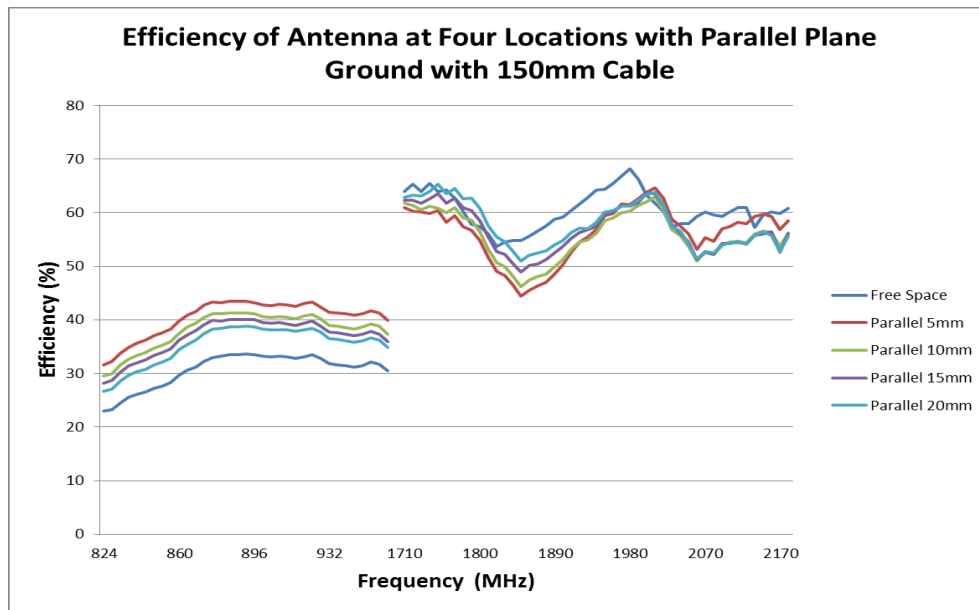


FIGURE 6.3.5 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 150MM CABLE

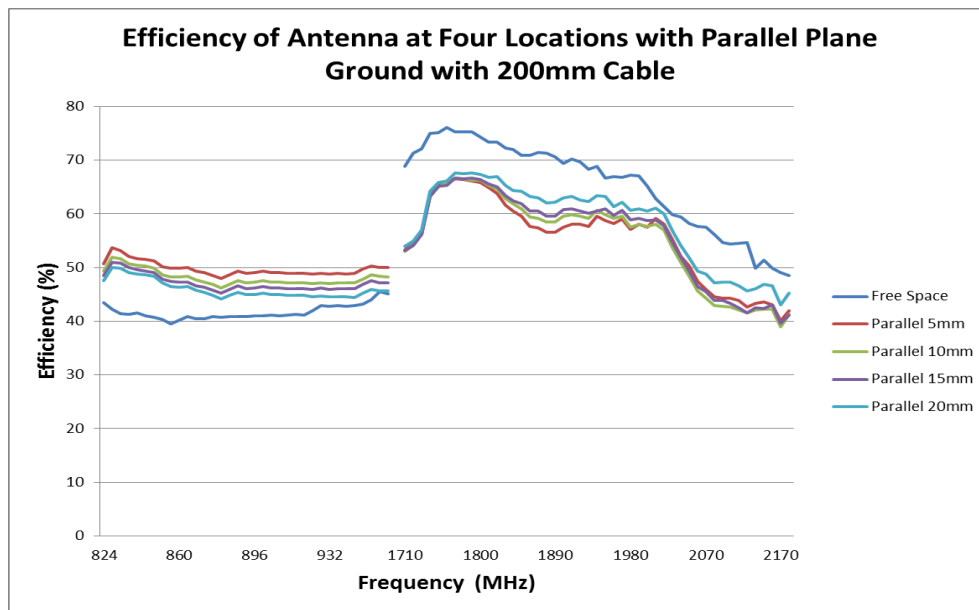


FIGURE 6.3.6 EFFICIENCY OF ANTENNA AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND WITH 200MM CABLE

REVISION: A	ECR/ECN INFORMATION: EC No: 174969 DATE: 2018/05/09	TITLE: 824-2170MHz Flexible Antenna Application Specification	SHEET No. 36 of 36
DOCUMENT NUMBER: AS-2072350100	CREATED / REVISED BY: Liu Hai 2018/05/09	CHECKED BY: Benson Liu 2018/05/09	APPROVED BY: Chris Zhong 2018/05/09