

Surge protection plug - CT 10-2PE/FS-24 - 2807955

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




LSA-PLUS plug (COMTRAB CT 10) with coarse/fine surge protection, for 10 floating signal circuits. Nominal voltage: 24 V DC. Version: 10 double wires.

Why buy this product

- For use with CT-TERMIBLOCK and with LSA-PLUS and LSA-PROFIL disconnect and control strips
- Multi-position, plug-in modular design
- Applications include systems with higher signal voltages
- Protection modules must be inserted in the correct direction
- Combined protective circuits



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 104740
GTIN	4017918104740

Technical data

Dimensions

Height	22 mm
Width	111 mm
Depth	68.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 75 °C
Degree of protection	IP20

General

Housing material	PBT
Flammability rating according to UL 94	V0
Color	black

Surge protection plug - CT 10-2PE/FS-24 - 2807955

Technical data

General

Standards for clearances and creepage distances	VDE 0110-1
	IEC 60664-1
Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
Type	LSA-PLUS module
Direction of action	Line-Line & Line-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous voltage U_C	40 V DC
	28 V AC
Nominal current I_N	1.5 A (75 °C)
Operating effective current I_C at U_C	$\leq 5 \mu\text{A}$ (a-b)
Residual current I_{PE}	$\leq 1 \mu\text{A}$ (per path)
Nominal discharge current I_n (8/20) μs (line-line)	119 A (25 °C)
Nominal discharge current I_n (8/20) μs (line-earth)	5 kA
Total surge current (8/20) μs	10 kA
Max. discharge current I_{max} (8/20) μs maximum (line-line)	119 A (25 °C)
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	5 kA
Nominal pulse current I_{an} (10/1000) μs (line-line)	23 A (25 °C)
Output voltage limitation at 1 kV/ μs (line-line) spike	≤ 70 V
Output voltage limitation at 1 kV/ μs (line-earth) spike	≤ 650 V
Output voltage limitation at 1 kV/ μs (line-line) static	≤ 60 V
Output voltage limitation at 1 kV/ μs (line-earth) static	≤ 650 V
Residual voltage at I_n (line-line)	≤ 85 V
Residual voltage with I_{an} (10/1000) μs (line-line)	≤ 65 V
Response time t_A (line-line)	≤ 1 ns
Response time t_A (line-earth)	≤ 100 ns
Input attenuation aE, sym.	0.1 dB (Typ. up to 2 MHz / 50 Ω)
	0.1 dB (Typ. up to 1 MHz / 150 Ω)
	0.1 dB (Typ. up to 400 kHz / 600 Ω)
Cut-off frequency f_g (3 dB), sym. in 50 Ohm system	10 MHz (typ.)
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	4 MHz (typ.)
Cut-off frequency f_g (3 dB), sym. in 600 Ohm system	1 MHz (typ.)
Capacity (line-line)	1.1 nF ($f=1$ MHz / $V_R=0$ V)
Capacity (line-earth)	1 pF

Surge protection plug - CT 10-2PE/FS-24 - 2807955

Technical data

Protective circuit

Surge protection fault message	none
Impulse durability (line-earth)	C1 - 1 kV/500 A
	C2 - 10 kV/5 kA
	C3 - 100 A
	D1 - 2.5 kA

Connection data


Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
Connection method IN	COMTRAB plug-in system
Connection method OUT	COMTRAB plug-in system

Standards and Regulations


Standards/regulations	IEC 61643-21
Standards/specifications	IEC 61643-21 2000

Drawings

Dimensional drawing

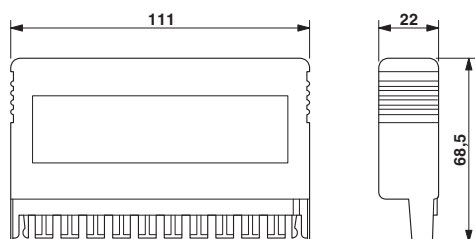

Circuit diagram

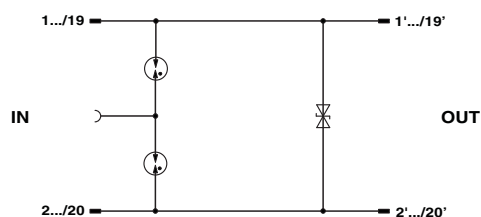

Approvals

Approvals

Approvals

EAC / EAC


Ex Approvals

Approval details

Surge protection plug - CT 10-2PE/FS-24 - 2807955

Approvals

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

EAC		EAC-Zulassung
-----	---	---------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>