

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL INTERNATIONAL RIGHTS RESERVED.

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.




P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 0,94 to 1,09 mm
AFTER REFLOW	: 0,91 to 1,09 mm
Cu-thks	: 0,025 to 0,075 mm
SnPb-thks	: 0,004 to 0,010 mm

LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C	-		05-04-02	CB	CB
		C1	ECR-10-004467		10-03-10	GSK	MKO

NOTES:

- 1 MATERIAL CONTACT: PHOSPHORBRONZE.
MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER.
- 2 AT CONTACTAREA Au OVER Ni, PERFROMANCE LEVEL I
ACC. IEC 603-2; REMAINDER Sn
- 3 AT CONTACTAREA AU OVER NI PERFORMANCE LEVEL II
ACC. IEC 603-2; REMAINDER Sn
- 4 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE
OF MATING AREA OF ROW d.
- 5 STAND-OFF RIBS OPTIONAL.

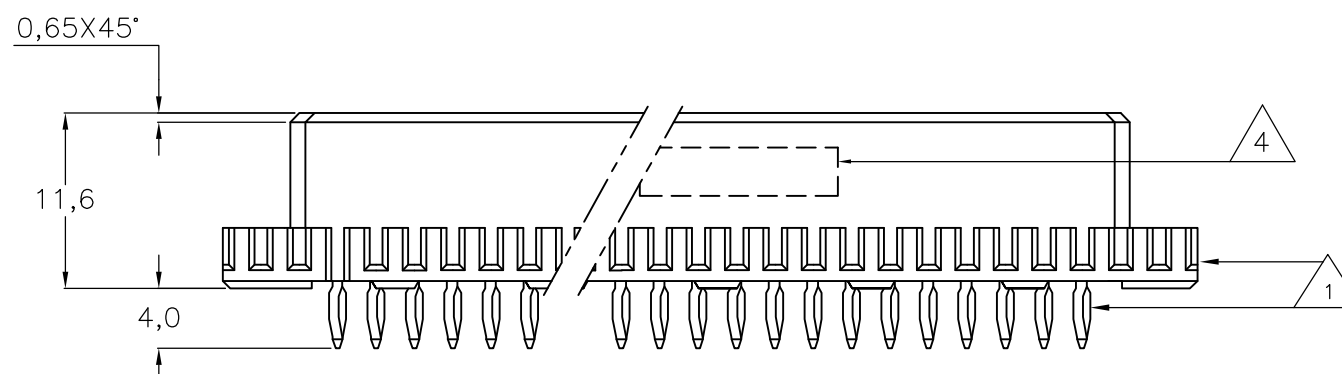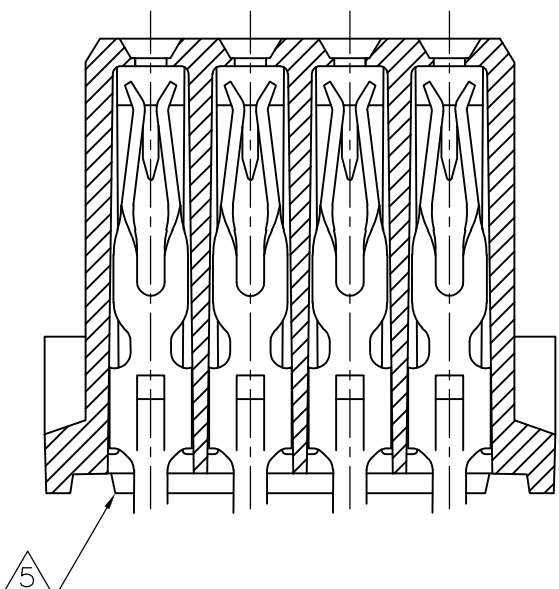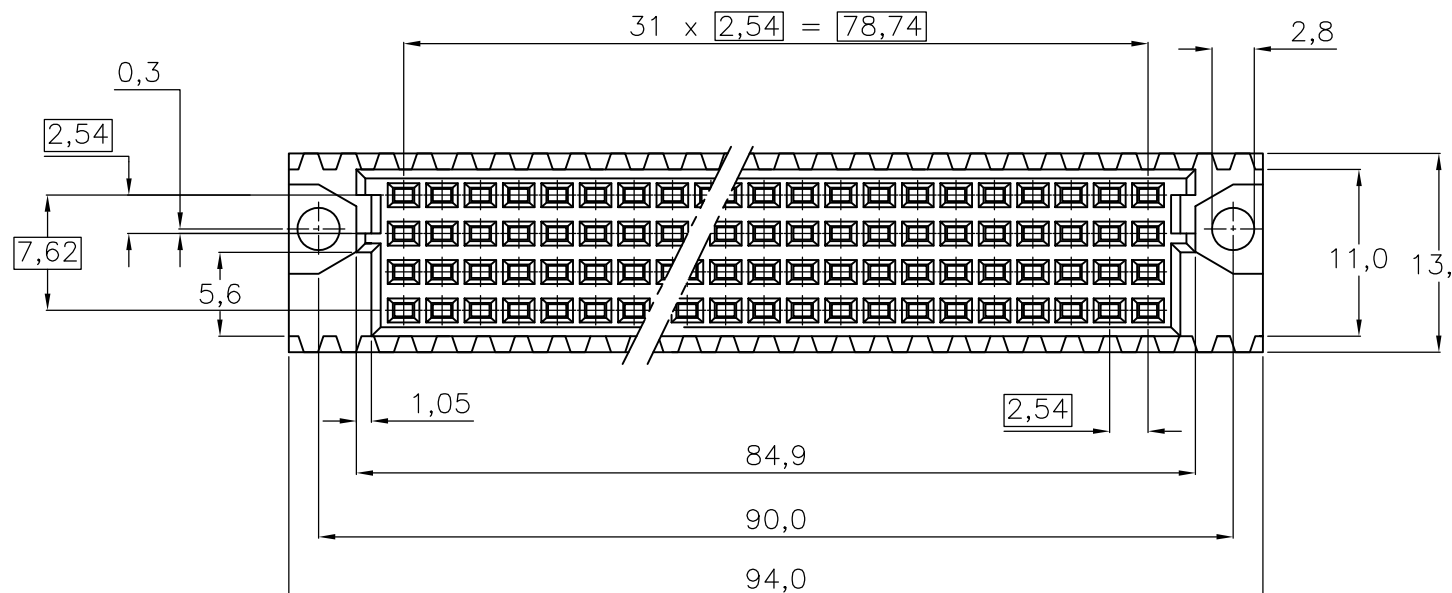

ROW	a	b	c	d																												
POS	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

AN ASTERISK „X” DENOTES A SIGNAL CONTACT.

OBSOLETE	³	¹	216415-4
	²	¹	216415-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Colpaert B. 05ARR02			Tyco Electronics Corporation EC N.V. Oostkamp - Belgium			
DIMENSIONS: mm		CHK	Colpaert B. 05ARR02			NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	Colpaert B. 05ARR02		4X32 POS FEMALE B.T.B CONN. ASS'Y FOR 1,6mm P.C.BOARD THK'S				
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
2 PLC ± -	3 PLC ± -	APPLICATION SPEC	-		A3	00779	C=216415	-	
4 PLC ± -	ANGLES ± -	WEIGHT	-		CUSTOMER DRAWING			SCALE	SHEET
MATERIAL		FINISH			NTS		1 OF 1		REV
-		-			C1				