

RT-610 SERIES

Related Information

- General terms and conditions..... F-7
- Sensor selection guide..... P.271~
- Glossary of terms..... P.1455~
- General precautions P.1458~




panasonic.net/id/pidsx/global

Suitable for address reading and sensing cut-off marks

Beam axis alignment not required


Beam axis alignment is not required as the emitter and the receiver are integrated in a single body.




2 types • 4 models are available.

There are three models having a sensing range of 10 mm **0.394 in**, 20 mm **0.787 in**, and 50 mm **1.969 in**. The models with sensing ranges of 10 mm **0.394 in** and 20 mm **0.787 in** are also available in red LED type and green LED type for mark sensing.

RT-610-10□



RT-610-50



Robust die-cast enclosure

The robust die-cast enclosure maintains high reliability.

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200

RX

RT-610

Selection Guide

Amplifier Built-in

Power Supply Built-in

Amplifier-separated

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS


FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS


APPLICATIONS

Address reading

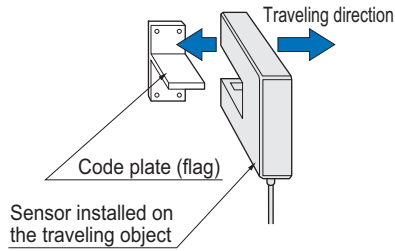


It can also be used to confirm the position of transportation equipment such as crane, etc.

Sensing cut-off marks

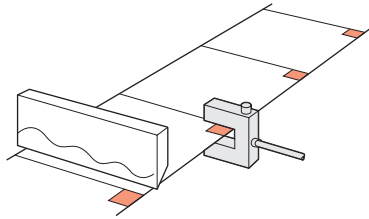

It can sense cut-off marks on a transparent film.

Sensing overlapping paper

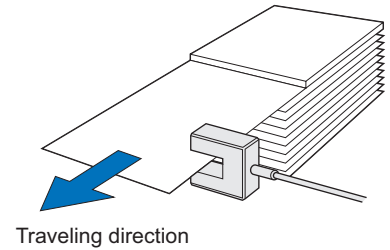

Checking paper feed on various printing machines.

ORDER GUIDE

Type	Appearance	Sensing range	Model No.	Output	Emitting element
10 mm 0.394 in sensing range For mark sensing			RT-610-10	NPN transistor universal	Infrared LED
			RT-610-10R		Red LED
			RT-610-10G		Green LED
50 mm 1.969 in sensing range			RT-610-50		Infrared LED

5 m 16.404 ft cable length type

5 m 16.404 ft cable length type (standard: 1 m 3.281 ft) is also available. When ordering this type, suffix “-C5” to the model No. (e.g.) 5 m 16.404 ft cable length type of RT-610-10 is “RT-610-10-C5”.

- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS / SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Selection Guide
- Amplifier Built-in
- Power Supply Built-in
- Amplifier-separated
- CX-400**
- CY-100**
- EX-10**
- EX-20**
- EX-30**
- EX-40**
- CX-440**
- EQ-30**
- EQ-500**
- MQ-W**
- RX-LS200**
- RX**
- RT-610**

FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC ELECTRICITY PREVENTION DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY CONSUMPTION VISUALIZATION COMPONENTS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS


SPECIFICATIONS

Type		U-shaped thru-beam			
		For mark sensing			
Item	Model No.	RT-610-10	RT-610-50	RT-610-10R	RT-610-10G
Sensing range (fixed)		10 mm 0.394 in	50 mm 1.969 in	10 mm 0.394 in	
Sensing object		ø4 mm ø0.157 in or more opaque object		ø4 mm ø0.157 in or more opaque or translucent object (Note 2)	
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less			
Current consumption		40 mA or less			
Output		NPN transistor universal • Maximum sink current: 80 mA • Residual voltage: 1 V or less (at 80 mA sink current)			
Utilization category		DC-12 or DC-13		————	
Output operation		Incorporated with two outputs, Light-ON / Dark-ON			
Response time		0.1 ms or less			
Operation indicator		Red LED (lights up under light received condition)			
Sensitivity adjuster		Continuously variable adjuster	————	Continuously variable adjuster	
Environmental resistance	Pollution degree	3 (Industrial environment)			————
	Protection	IP62 (IEC)	IP66 (IEC)	IP62 (IEC)	
	Ambient temperature	-10 to +60 °C +14 to +140 °F (No dew condensation or icing allowed), Storage: -10 to +60 °C +14 to +140 °F			
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH			
	Ambient illuminance	Incandescent light: 3,500 lx at the light-receiving face			
	EMC	EN 60947-5-2			————
	Vibration resistance	10 to 55 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each			
	Shock resistance	500 m/s ² acceleration (50 G approx.) in X, Y and Z directions for three times each			
Emitting element		Infrared LED (modulated)	Red LED (modulated)	Green LED (modulated)	
Peak emission wavelength		950 nm 0.037 mil	680 nm 0.027 mil	570 nm 0.022 mil	
Enclosure earthing		Floating			
Material		Enclosure: Die-cast aluminum			
Cable		0.3 mm ² 4-core cabtyre cable, 1 m 3.281 ft long			
Cable extension		Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable.			
Net weight		150 g approx.	180 g approx.	150 g approx.	

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.
2) Make sure to confirm detection with an actual sensor before use.

I/O CIRCUIT AND WIRING DIAGRAMS


I/O circuit diagram

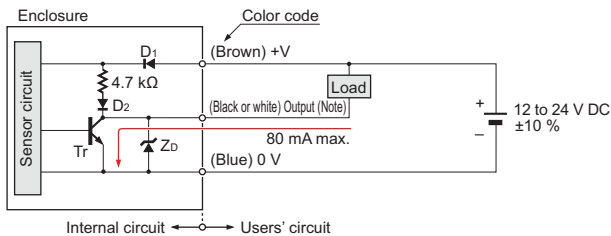

Note: The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load.

Symbols ... D1 : Reverse supply polarity protection diode
D2 : Reverse current prevention diode
ZD : Surge absorption zener diode
Tr : NPN output transistor

Wiring diagram

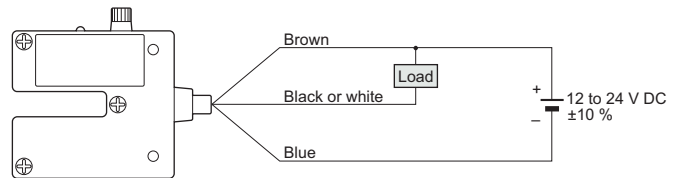

Output operation

Color code	Output operation
Black	Light-ON
White	Dark-ON

CX-400
CY-100
EX-10
EX-20
EX-30
EX-40
CX-440
EQ-30
EQ-500
MQ-W
RX-LS200
RX
RT-610

PRECAUTIONS FOR PROPER USE

Refer to p.1458~ for general precautions.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Power Supply Built-in

Amplifier-separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30


EQ-500

MQ-W

RX-LS200

RX

RT-610



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.


Others

- The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load.
- Do not use during the initial transient time (50 ms) after the power supply is switched on.

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.

RT-610-10□ 10 mm **0.394 in** sensing range type

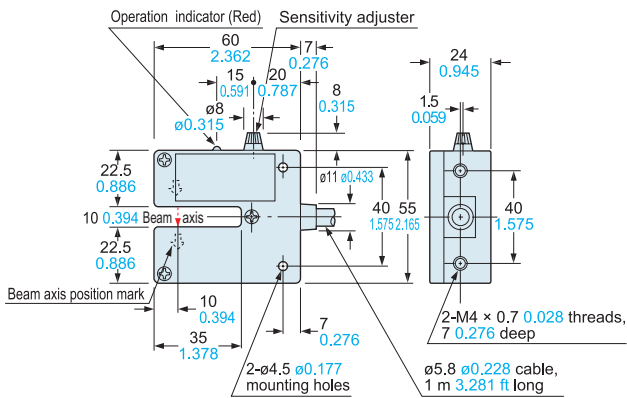

RT-610-50 50 mm **1.969 in** sensing range type

