THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REVISED PER ECO-08-004952	9JUN2008	ZMR	SLB

EJECTION LATCHES OMITTED IN THIS VIEW FOR CLARITY

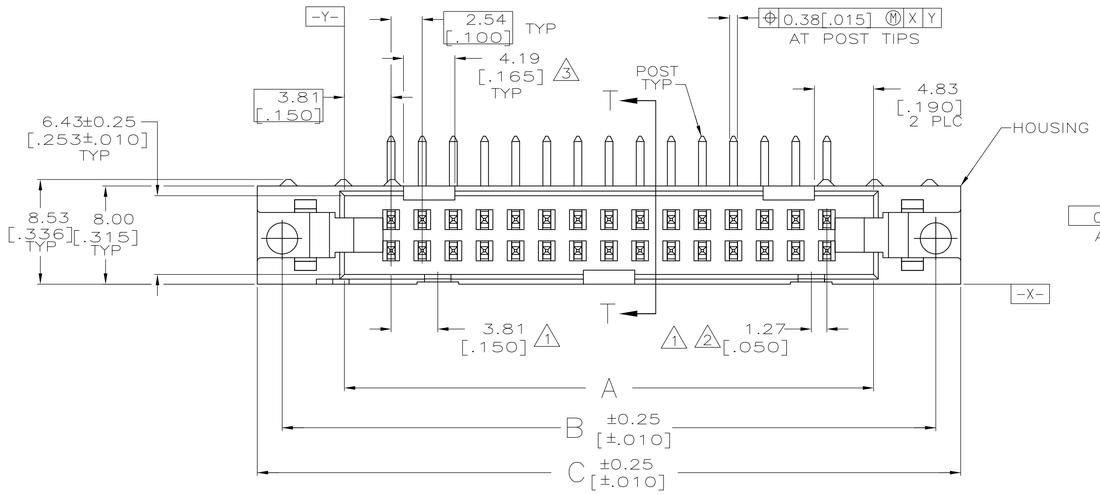

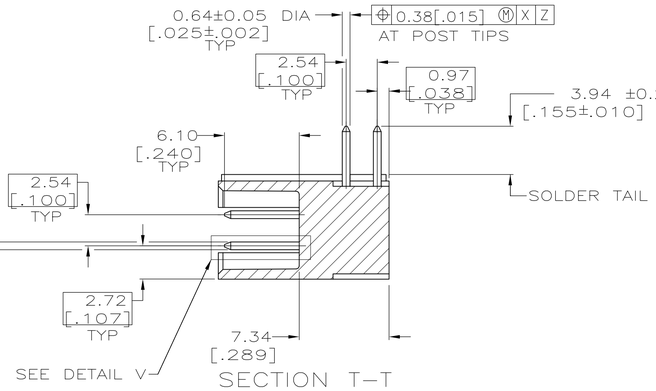

SECTION T-T

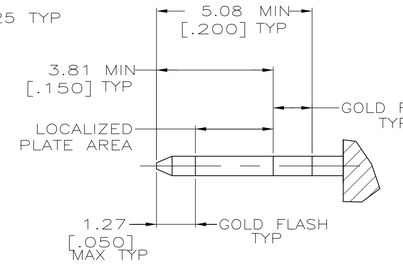

DETAIL V
SCALE 10:1

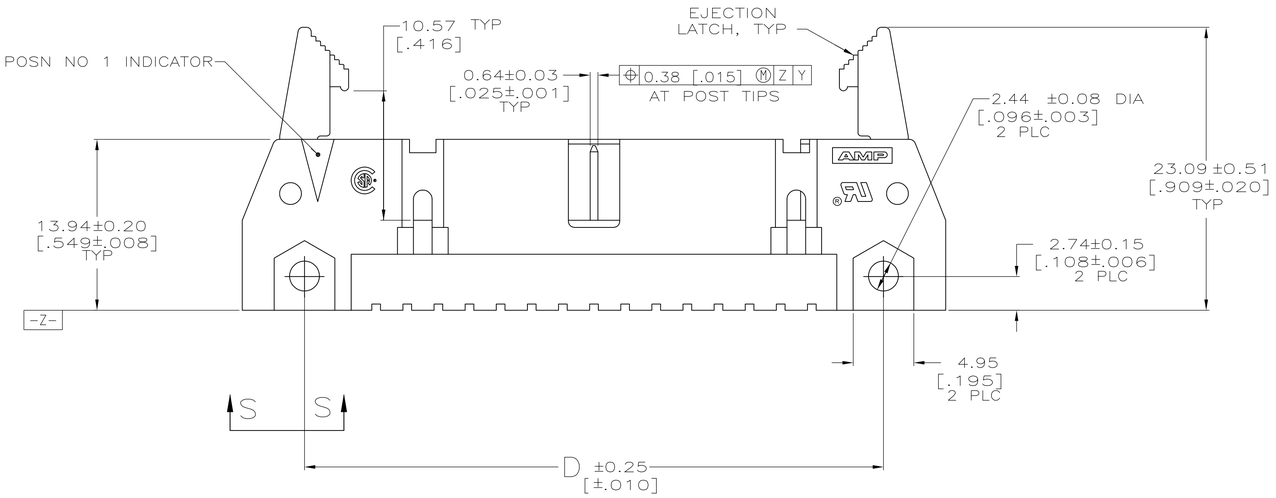

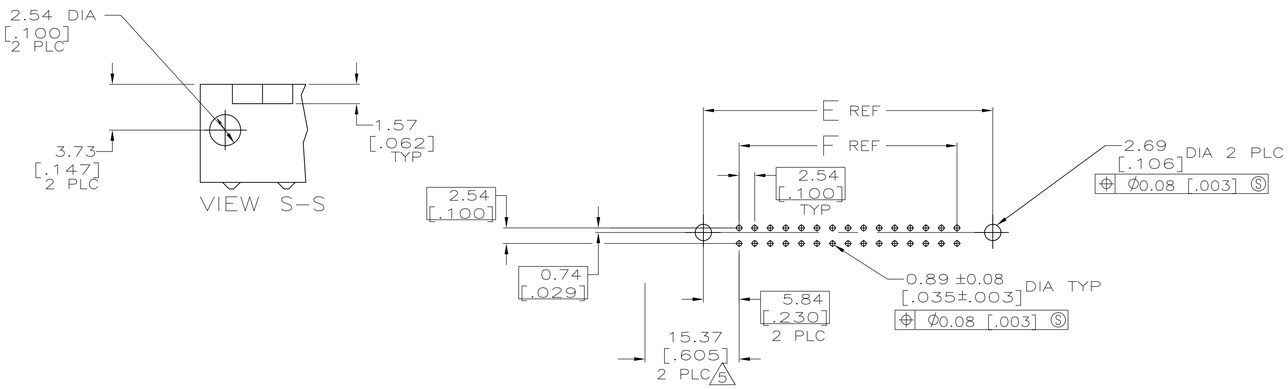

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
SCALE 2:1

1 COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.

2 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.

3 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.

4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 3.18 [.125].

5 DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.

6 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76µm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54µm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER TAIL, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
0.76µm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54µm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER TAIL, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

			F	E	D	C	B	A	NO OF POSN	PART NUMBER
OBSOLETE	-	-	53.34 [2.100]	65.02 [2.560]	65.02 [2.560]	75.18 [2.960]	71.12 [2.800]	60.96 [2.400]	44	1-499376-3
	1-102162-2	102312-1	78.74 [3.100]	90.42 [3.560]	90.42 [3.560]	100.58 [3.960]	96.52 [3.800]	86.36 [3.400]	64	1-499376-2
	1-102162-1	102312-1	73.66 [2.900]	85.34 [3.360]	85.34 [3.360]	95.50 [3.760]	91.44 [3.600]	81.28 [3.200]	60	1-499376-1
	1-102162-0	102312-1	60.96 [2.400]	72.64 [2.860]	72.64 [2.860]	82.80 [3.260]	78.74 [3.100]	68.58 [2.700]	50	1-499376-0
	-	-	48.26 [1.900]	59.94 [2.360]	59.94 [2.360]	70.10 [2.760]	66.04 [2.600]	55.88 [2.200]	40	499376-9
	102162-8	102312-1	40.64 [1.600]	52.32 [2.060]	52.32 [2.060]	62.48 [2.460]	58.42 [2.300]	48.26 [1.900]	34	499376-8
	102162-7	102312-1	35.56 [1.400]	47.24 [1.860]	47.24 [1.860]	57.40 [2.260]	53.34 [2.100]	43.18 [1.700]	30	499376-7
	102162-6	102312-1	30.48 [1.200]	42.16 [1.660]	42.16 [1.660]	52.32 [2.060]	48.26 [1.900]	38.10 [1.500]	26	499376-6
OBSOLETE	-	-	27.94 [1.100]	39.62 [1.560]	39.62 [1.560]	49.78 [1.960]	45.72 [1.800]	35.56 [1.400]	24	499376-5
	102162-4	102312-1	22.86 [.900]	34.54 [1.360]	34.54 [1.360]	44.70 [1.760]	40.64 [1.600]	30.48 [1.200]	20	499376-4
	102162-3	102312-1	17.78 [.700]	29.46 [1.160]	29.46 [1.160]	39.62 [1.560]	35.56 [1.400]	25.40 [1.000]	16	499376-3
	102162-2	102312-1	15.24 [.600]	26.92 [1.060]	26.92 [1.060]	37.08 [1.460]	33.02 [1.300]	22.86 [.900]	14	499376-2
	102162-1	102312-1	10.16 [.400]	21.84 [.860]	21.84 [.860]	32.00 [1.260]	27.94 [1.100]	17.78 [.700]	10	499376-1
	HEADER ASSY QTY:1	LATCH QTY:2								
	SUPERSEDED BY									

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13[.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK
POSTS: BRASS

FINISH: 6

DWN	H.MOLL 4-23-90
CHK	R.STONE 11-28-90
APVD	S. GOOD 11-29-90
PRODUCT SPEC	108-40018
APPLICATION SPEC	-
WEIGHT	-

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: HEADER ASSY, UNIVERSAL, AMP-LATCH™

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-499376	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV L

4805 (1/08)