



PANDUIT PART NO.	PRODUCT WORKS WITH PANDUIT PART NUMBERS:	APPLICATION SURFACE:	WEIGHT lbs / 10 (g) / pcs.
JMSBCB87-3-_-	JMJH2 JMOD CABLE SUPPORT	BEAMS UP TO 0.75" (19.05mm) THICK	7.34 (3329)

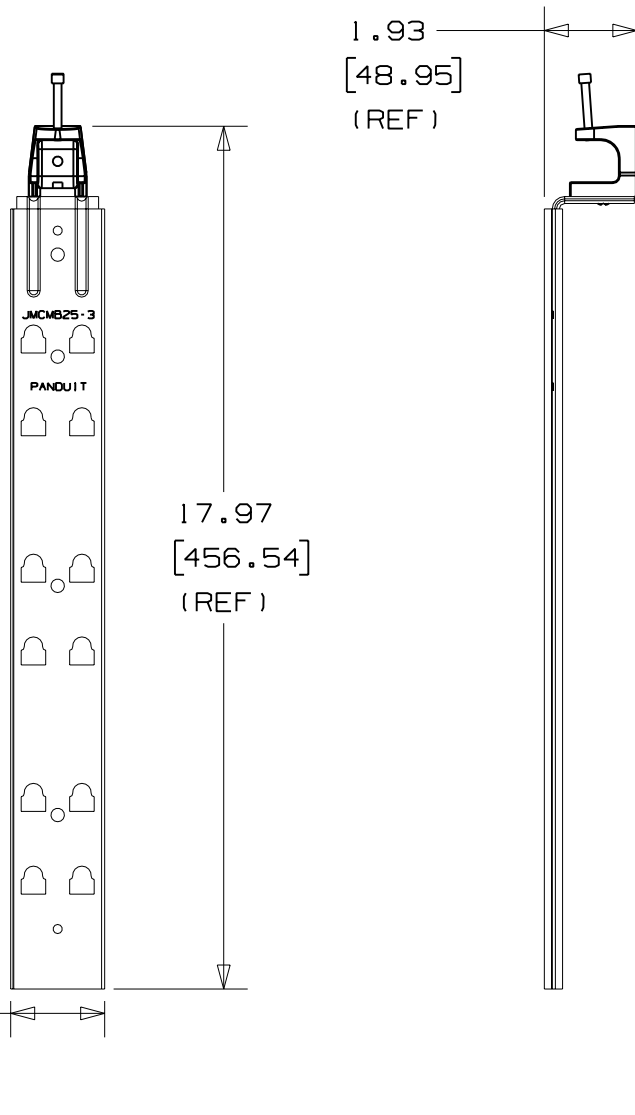

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- SCREW USED TO ATTACH THE BEAM CLAMP TO THE METAL BRACKET CAN BE LOOSENED ALLOWING USER TO VARY INSTALLED ANGLE. AFTER BEAM CLAMP HAS BEEN ROTATED TO THE DESIRED ANGLE, USER SHOULD RE-TIGHTEN THE SCREW.
- ASSEMBLY COMPONENT MATERIALS:
 - PRE-GALVANIZED STEEL (JMCMB25-1)
 - ZINC PLATED STEEL (BOLT)
 - MALLEABLE IRON (BEAM CLAMP)
- RATED STATIC LOAD:
180 lbs. (81.65kg)
- JMSBCB87-3 WILL ACCEPT UP TO SIX MJMH2 J HOOK PRODUCTS.

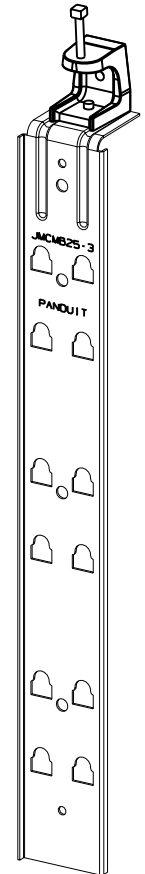

DIMENSIONS IN BRACKETS ARE METRIC [mm]	
CAD FILENAME/LAYERS	G02672DV_PS_JMSBCB873_01
PANDUIT CORP. TINLEY PARK, ILLINOIS	
JMOD BEAM CLAMP BRACKET ASSEMBLY (JMSBCB87-3-_-)	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 (1.31) (.XXX) ±0.010 (0.25) (.XX) ±0.02 (0.5) ANGLES ± 5°	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
DRAWN BY JAD	MAT'L:
DATE 3/7/03	SEE NOTE 3
SCALE NONE	DWG SIZE A
DRAWING NO. GB2672DV	CHK'D

1	2/20/06	JAD		UPDATE APPLICATION SURFACE CALLOUT, WAS .88"	GB2722DV	1			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	