


Notes 1 : Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.
 ②: If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.

Part No.	Number of contacts	Code No.	A	B	C	D
DF13E-10DP-1.25V(55)	10	CL536-0566-0-55	12.1	5.0	7.5	8.7
DF13E-20DP-1.25V(55)	20	CL536-0567-0-55	18.35	11.25	13.75	14.95
DF13E-30DP-1.25V(55)	30	CL536-0568-0-55	24.60	17.50	20.00	21.20
DF13E-40DP-1.25V(55)	40	CL536-0569-0-55	30.85	23.75	26.25	27.45

2	Brass	5	S. PVC	Gray				
		4	R. PVC	Electrostatic protection				
1	Polyamide	3	Phosphor bronze	Tin plated 1µm MIN				
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		5 : 1						
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	16.03.31	DRAWING NO.		EDC-367983-55-00		
		CHECKED : TS. FUKUSHIMA	16.03.29	PART NO.		DF13E-*DP-1.25V(55)		
		DESIGNED : MI. SAKIMURA	16.03.29	CODE NO.		CL536-		
		DRAWN : MI. SAKIMURA	16.03.29					

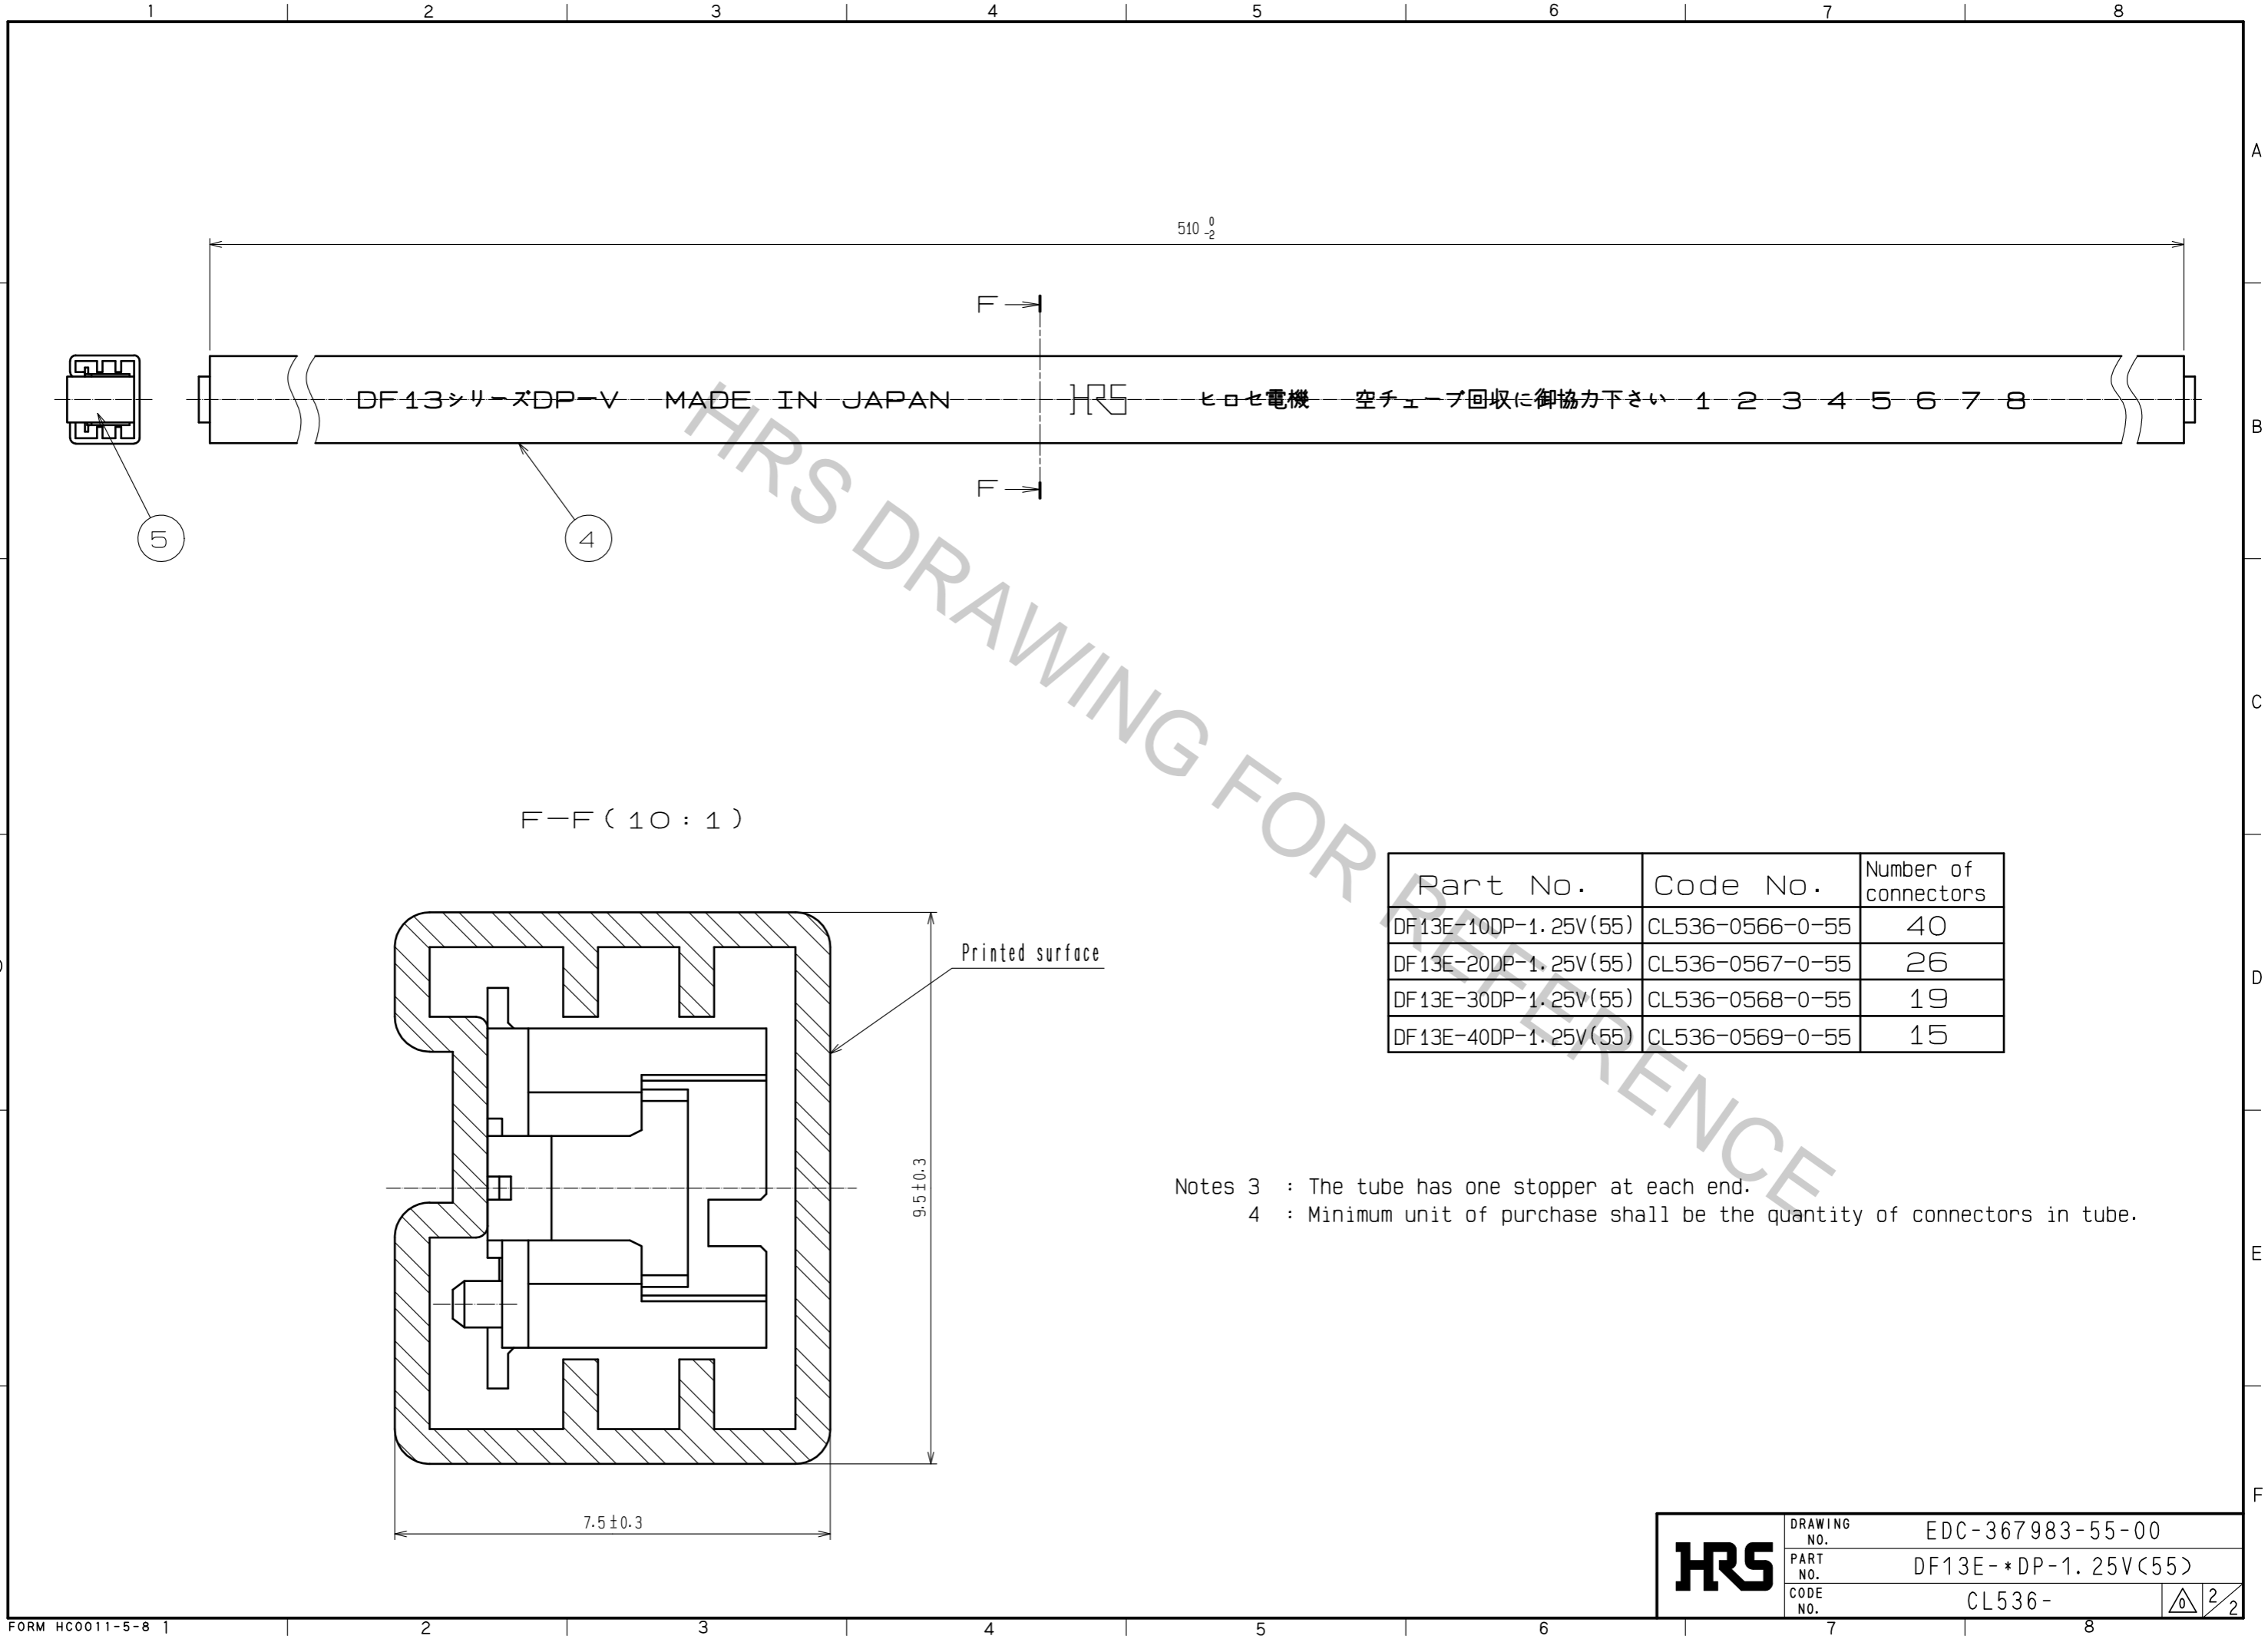

DF13シリーズDP-V MADE IN JAPAN

510⁰/₋₂

F-F (10 : 1)

Printed surface

9.5 ± 0.3

7.5 ± 0.3

Part No.	Code No.	Number of connectors
DF13E-10DP-1.25V(55)	CL536-0566-0-55	40
DF13E-20DP-1.25V(55)	CL536-0567-0-55	26
DF13E-30DP-1.25V(55)	CL536-0568-0-55	19
DF13E-40DP-1.25V(55)	CL536-0569-0-55	15

Notes 3 : The tube has one stopper at each end.
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

HRS	DRAWING NO.	EDC-367983-55-00	
	PART NO.	DF13E-*DP-1.25V(55)	
	CODE NO.	CL536-	2/2