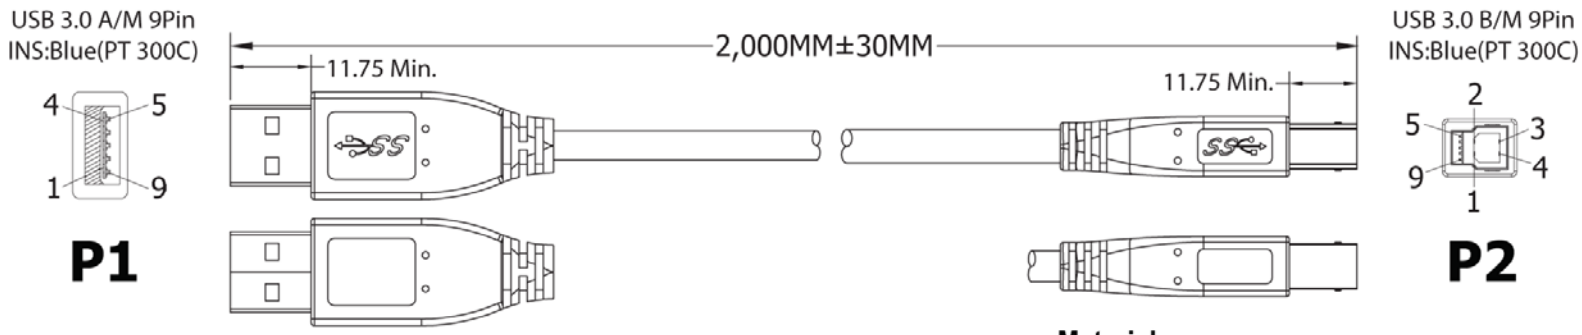

Material:

- Cable: UL-27725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7.0127 T.C.)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin +AL/MY +B.D(85%)
- PVC Jacket

OD: 5.2±0.15MM

- Color: Black
- P1 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30μ"
- Shell: Ni-Plated
- P2 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30μ"
- Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

Electrical:

- 100% Open short & mis wire test
  Contact Resistance: 3Ω Max.
  Insulation Resistance: 10Ω Min.
- Hi-Pot 300V DC

Unit: MM

PIN OUT

P1		P2
1	RED	1 PWR
2	WHITE	2 UTP_D-
3	GREEN	3 UTP_D+
4	BLACK	4 GND_PWRrt
5	BLUE	5 SDP1-
6	YELLOW	6 SDP1+
7	D.W	7 SDP1_Drain & SDP2_Drain
8	PURPLE	8 SDP2-
9	ORANGE	9 SDP2+
SHELL	B.D	SHELL

RoHS Complaint

Scale	1:1						Name
TOLERANCE					Drawn	01.04.12	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.
AK672/3-2

Title USB 3.0 Cable, A Male <=> B Male, 9 Pin, Insulation Blue, 2 Meters

Drawing No.

rev00

Replace

Sheet