

MODEL:

PDU3MV6H50

3-Phase Metered Rackmount PDU



208V
3-Phase Input



Hubbell CS8365C
Plug



208V Single-
Phase Output



45 Outlets



12.6kW Load
Capacity



Digital
Load Meter




0U
Rackmount








Toolless
Mounting
Buttons

- A** Digital Load Meter
- B** C13 and C19 Outlets
- C** 20A 2-Pole Hydraulic Magnetic Circuit Breakers
- D** Removable Cord Retention Brackets
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6-ft. Input Power Cord
- H** Hubbell CS8365C Twist-Lock Input Plug
- I** Durable Metal Case




AC Input Connection: Insert Hubbell CS8365C twist-lock plug into compatible Hubbell CS8364C or CS8369 utility, generator or UPS outlet.

Also Includes: Cable Ties, Owner's Manual, PowerAlert Software CD-ROM

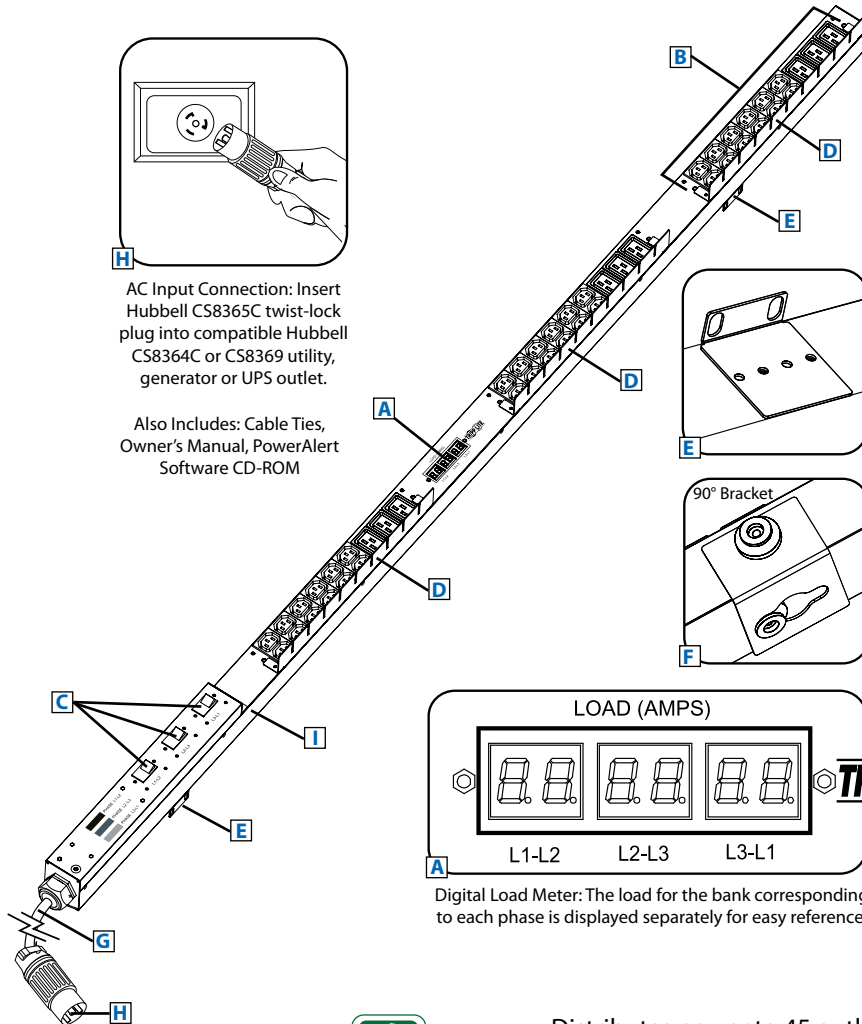

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

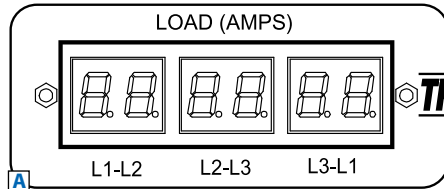

Digital Load Meter: The load for the bank corresponding to each phase is displayed separately for easy reference.



Specifications

Model	PDU3MV6H50
Voltage	208V (3-Phase Input/Single-Phase Output)
Frequency	50/60Hz
Load Capacity	12.6kW
Input Plug	Hubbell CS8365C (50A, 3-Pole, 4-Wire)
Input Cord Length	6 ft.
Outlets	45 (36 C13 / 9 C19)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	14.5 lbs / 70 x 2.65 x 2.2 in. <i>See next page for detailed unit measurements.</i>
Certifications	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS







Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 45 outlets (12 C13 and 3 C19 per phase)
- Displays load for any output phase in real time
- Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

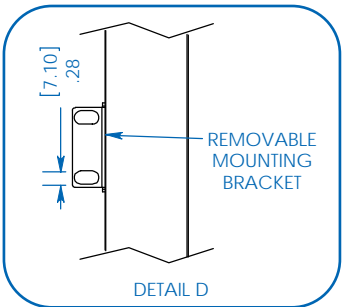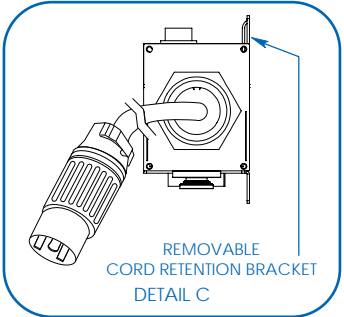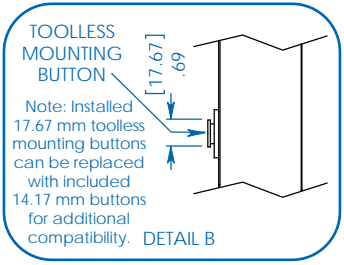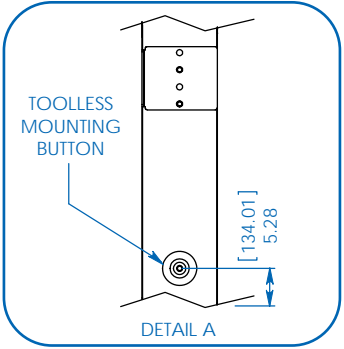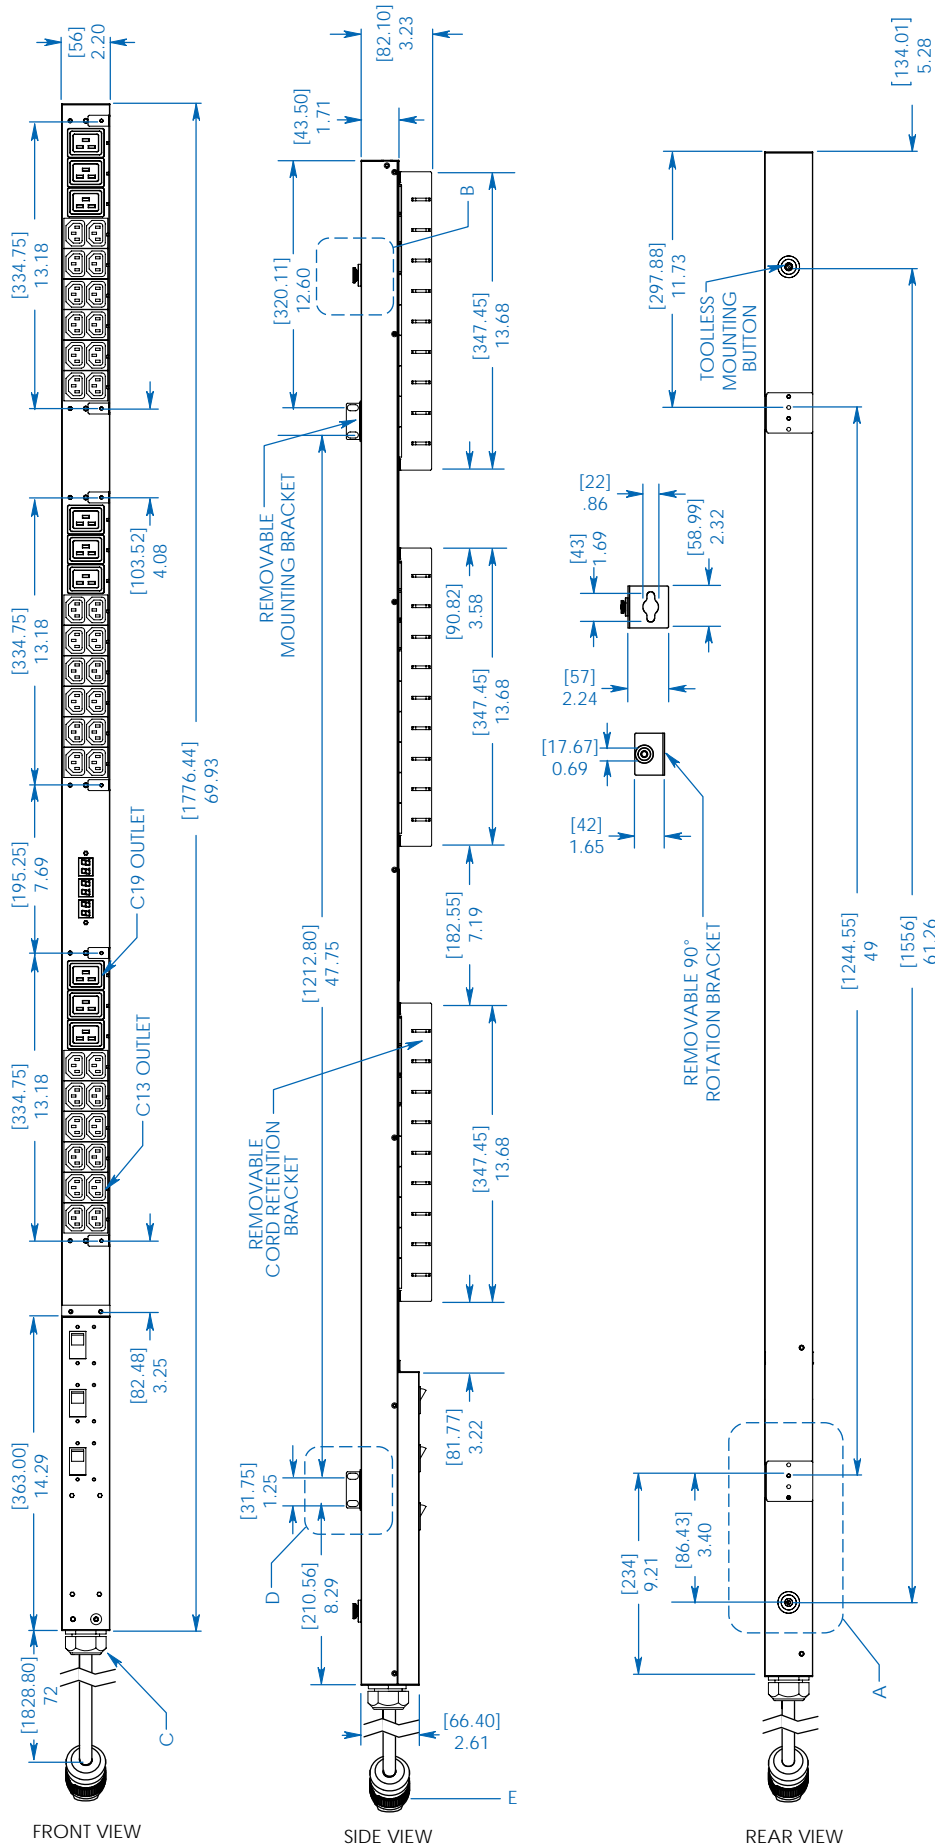

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU3MV6H50

TRIPP-LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com