


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: PICO HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS. CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001" [0.000254] THK MINIMUM. SPRING: STAINLESS STEEL TYPE 302.

- P/N W-701/COLOR 28AWG 19X40 TINNED COPPER 0.047 [1.19] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.

- PERFORMANCE
 MAXIMUM CURRENT: 1.0 AMPS
 MAXIMUM VOLTAGE: 600 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

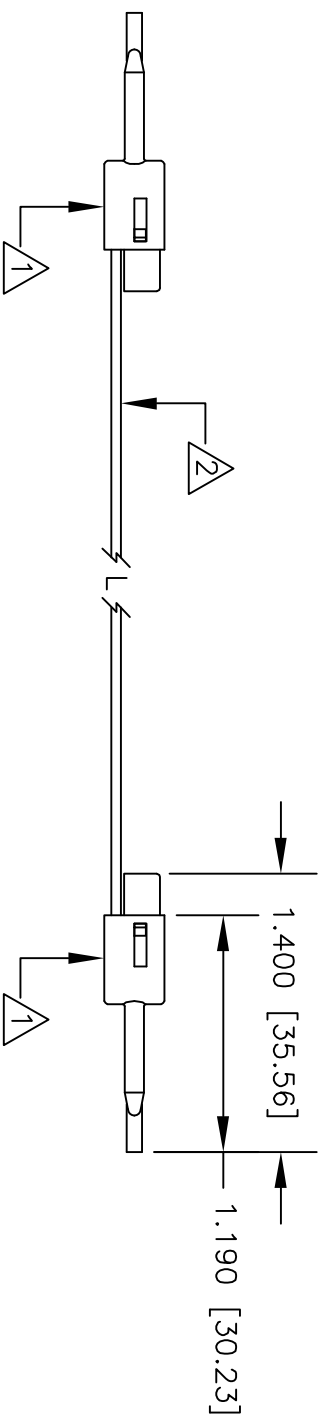

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION		
± .XX ±	± .XXX ±	APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. PICO HOOK JUMPER		
MATERIAL SEE NOTE.		DRAWN	R.L.			9/10
FINISH SEE NOTE.		APPROVED BY				
APPLICATION	USED ON	DO NOT SCALE DRAWING		SIZE	CODE IDENT NO.	
				A	08505	
				SCALE	DRAWING NO.	
				1:1	P704	
				SHEET 1	OF 1	
				REV.		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.