

CABLE, ELECTRIC, FILTER LINE - ELECTROLOSS™
ONE COMPONENT

5 December 1985

150°C


Revision D

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55F.

COMPONENT WIRE - 55FA0414

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED CONDUCTIVE ETFE

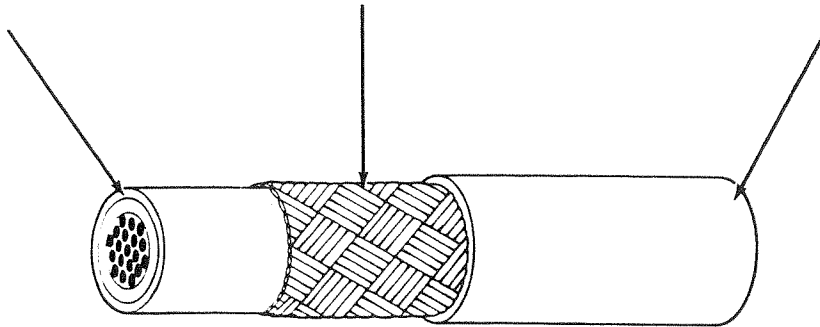

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
			55FB1414-26-*	26	38	.006	
55FB1414-24-*	24	38	.006	.008	.086	.090	8.5

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

BLOCKING: 200 ± 3°C for 6 hours

COLOR STRIPING DURABILITY: 125 cycles (250 strokes)

(minimum), 500 grams weight

CROSSLINKING PROOF TEST (ACCELERATED AGING):

300 ± 3°C for 7 hours

FLAMMABILITY: 3 seconds (maximum); 3 in. (maximum);

no flaming of facial tissue

IDENTIFICATION DURABILITY: 125 cycles (250 strokes)

(minimum), 500 grams weight

IMMERSION: 5% (maximum) diameter increase,

no cracking of jacket

JACKET COLOR: Black

JACKET CONCENTRICITY: 70% (minimum)

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 3500 psi (minimum)

JACKET FLAWS: Not Applicable

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: Oven temperature, 150 ± 3°C

.125 in. (maximum)

VOLTAGE WITHSTAND (DIELECTRIC): Conductor to

shield, 1500 volts (rms), 60 Hz

VOLTAGE WITHSTAND (POST-ENVIRONMENTAL): Not Applicable

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681; except that violet shall be light violet and the designator shall be 7L; with a dash separating the component wire color from the jacket color. Example: AWG 24, light violet component wire, black jacket: 55FB1414-24-7L-0.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
415) 361 3333 TWX 910 373 1205