


# Molded Parts Specification Control Drawing

Part Number : 214A052-X-12  
 Description : Boot, Rectangular, Subminiature, Straight

- NOTES**
- All dimensions are in  $\frac{\text{inches}}{\text{[millimeters]}}$
  - Dimensions appearing in table are as follows:
    - a - As Supplied
    - b - After Unrestricted Recovery
  - Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

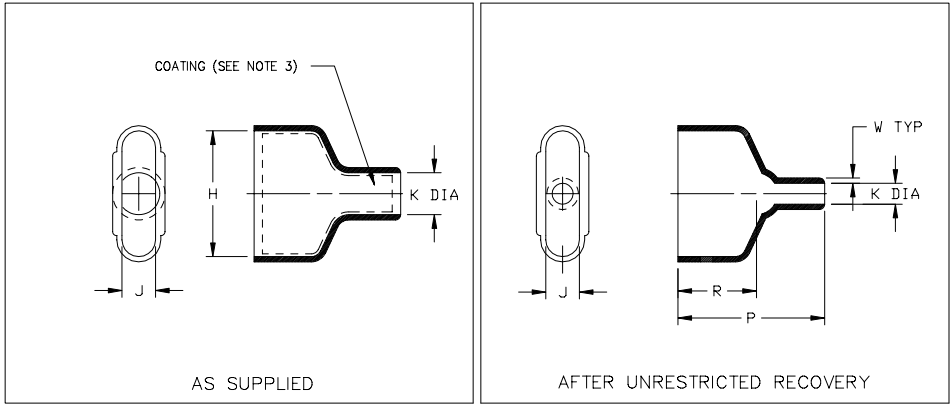

PART NUMBER	H		J		K		P ±10% b	R ±10% b	W ±20% b	This Boot Fits	
	Min a	±5% b	Min a	±5% b	Min a	Max b				Cannon/Cinch	Amphenol Series 17
214A052-X-12	2.73 [69,3]	2.28 [57,9]	.74 [18,8]	.54 [13,7]	.74 [18,8]	.42 [10,7]	2.40 [61,0]	1.25 [31,8]	.04 [1,0]	DD-50	XX50X

**tyco** **Raychem**  
**Electronics**  
 TYCO ELECTRONICS  
 300 CONSTITUTION DRIVE  
 MENLO PARK, CALIFORNIA 94025


Revision : A  
 Date : 8/27/03

Part Number : 214A052-X-12  
 Description : Boot, Rectangular, Subminiature, Straight

# Molded Parts Specification Control Drawing

Part Number : 214A052-X-12  
 Description : Boot, Rectangular, Subminiature, Straight

COMPATABILITY CHART					
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive

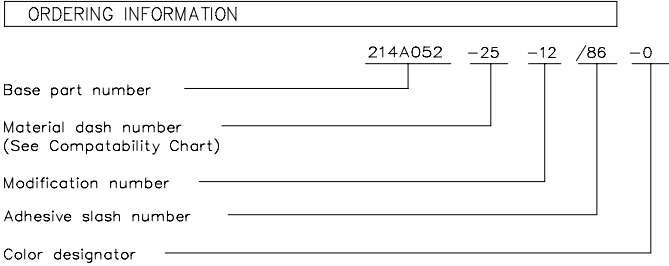

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

**If this document is printed it becomes uncontrolled.  
 Check for the latest revision.**

**tyco** **Raychem**  
**Electronics**  
 TYCO ELECTRONICS  
 300 CONSTITUTION DRIVE  
 MENLO PARK, CALIFORNIA 94025

Revision : A  
 Date : 8/27/03

Part Number : 214A052-X-12  
 Description : Boot, Rectangular, Subminiature, Straight