


ATTACHED PARTS(2:1)

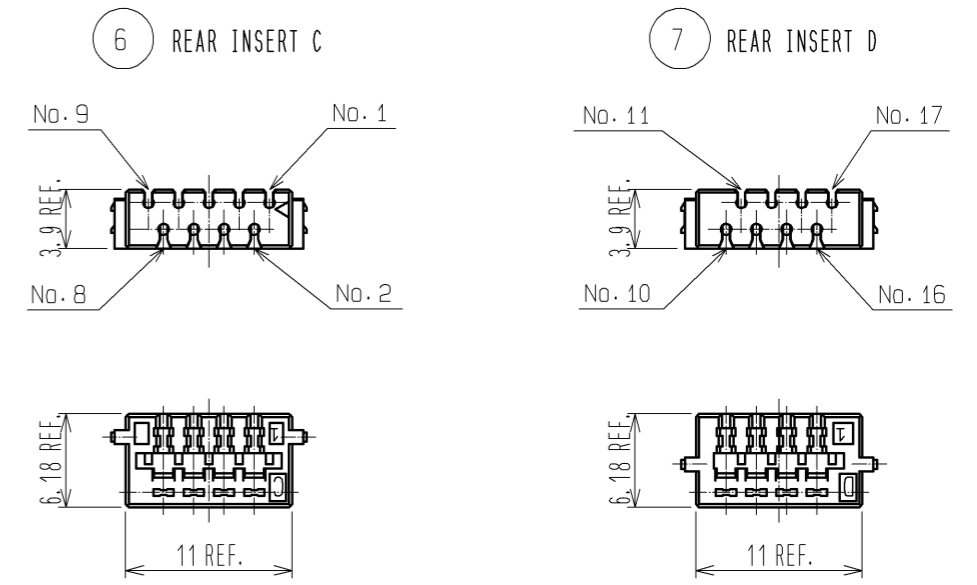

- NOTE 1 COMPONENTS OF REF. NO. ⑥ AND ⑦ ARE ATTACHED PARTS.
- ② CONTACT AREA : GOLD 0.2 μ m MIN
 INSULATION DISPLACEMENT AREA : GOLD 0.03 μ m MIN
 UNDER PLATING : NICKEL 1 μ m MIN
 - 3 THIS PRODUCT SHALL BE MATED WITH A 'DH60*-17P*'.
 4 THIS PRODUCT SHALL BE USED ASSEMBLED TO A COVER CASE
 'DH-17-C*+B' AND A CLAMP 'DH-17-CMB(5.9)'.

3	POLYAMIDE	BLACK, UL94V-0	7	PBT	BLACK, UL94V-0
2	COPPER ALLOY	②	6	PBT	WHITE, UL94V-0
1	COPPER ALLOY	②	5	STAINLESS STEEL	PLATING : NICKEL 1 μ m MIN
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

UNITS mm		SCALE 4 : 1	COUNT \triangle	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI	11.06.08	DRAWING NO.	EDC3-126598-00		
		CHECKED : RI. TAKAYASU	11.06.08	PART NO.	DH32B-17S		
		DESIGNED : YH. MAMADA	11.06.05	CODE NO.	CL244-0021-1-00		
		DRAWN : YH. MAMADA	11.06.05				