
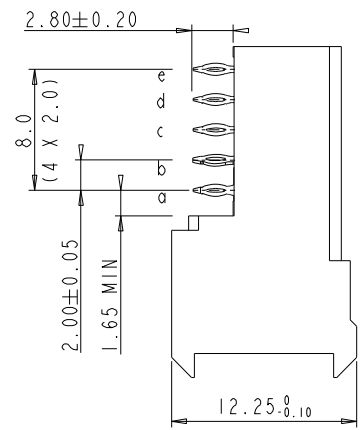


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

FCI


All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

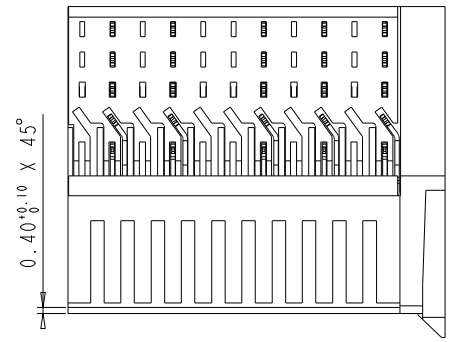

PERFORMANCE CHARACTERISTICS


- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

□ EMPTY CAVITY
 ◼ CAVITY LOADED WITH CONTACT

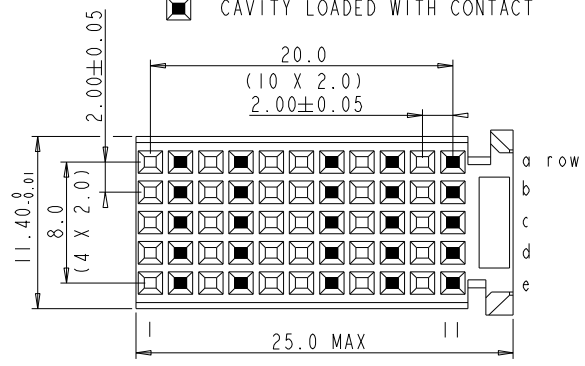

- NOTES
1. " " LEAD FREE INDICATOR : LF=LEAD FREE
 - " " PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY-OUT
P.C.B. - HOLE

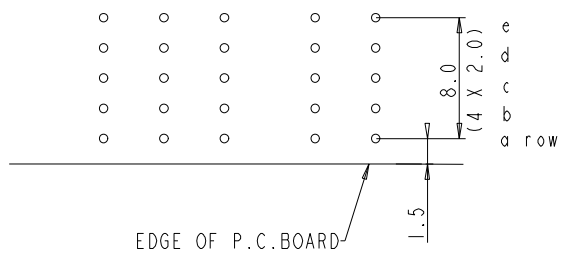

rev	ecn no	dr	date
A	CONVERSION REVISION 02	KN	14-09-01
B	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		✓	tolerance IDEC ± 0.2 IDEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN
Heatreat			
Plating/Finish		MM	
Dr	M.Fret	17-05-99	size A4
Eng	Product family MILLIPACS		Scale 2.000
Chr	Model Name		ECN DG05-0278
Appr	Model Revision		REL Level
		title	Rev.
Pro/E file		HM2P30PACA20	B
catalog		PDM: Rev-B	STATUS: Released
dwg no		BSC202468015	sheet 1 of 1
CUSTOMER DRAWING		Printed: Mar 15, 2011	