




RAYCHEM

THERMOFIT MOLDED PARTS

SPECIFICATION CONTROL DRAWING

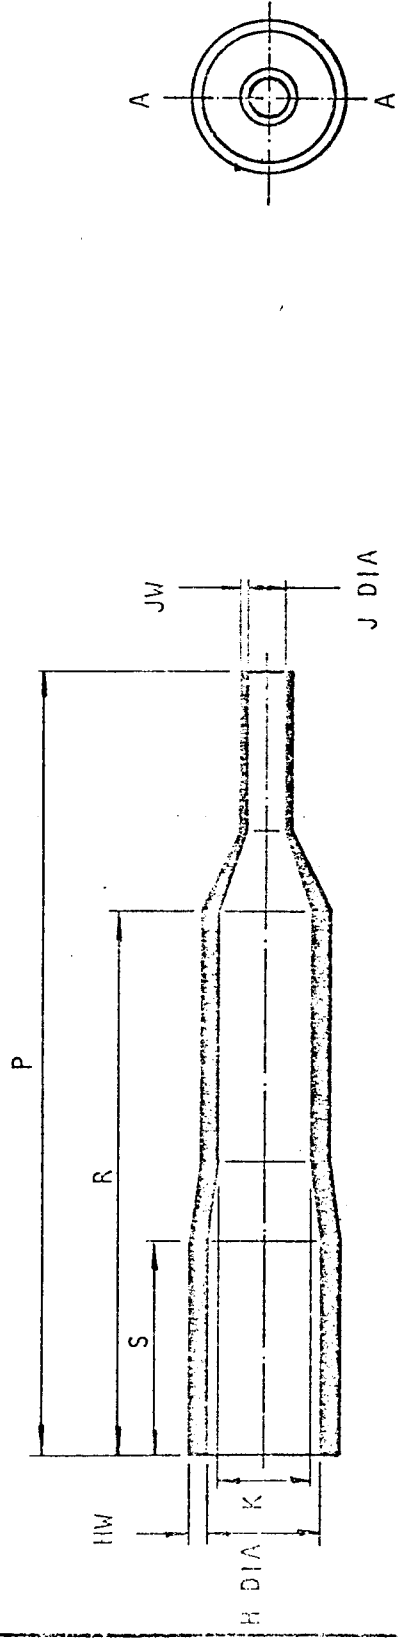

SECTION A-A

TABLE OF DIMENSIONS

a - As Supplied; b - After unrestricted recovery


| PART NUMBER | H        |          | J        |          | K        |          | P $\pm 10\%$ |     | R $\pm 10\%$ |     | S $\pm 10\%$ |     | HW $\pm 20\%$ |     | JW $\pm 20\%$ |     |        |
|-------------|----------|----------|----------|----------|----------|----------|--------------|-----|--------------|-----|--------------|-----|---------------|-----|---------------|-----|--------|
|             | Min<br>a | Max<br>b | Min<br>a | Max<br>b | Min<br>c | Max<br>b | a            | b   | a            | b   | a            | b   | a             | b   | a             | b   |        |
| 208W012-    | 25,4     | 14,0     | 10,2     | 5,1      | 25,4     | 11,4     | -            | 102 | -            | 71  | -            | 28  | -             | 2,5 | -             | 1,0 | mm     |
| 208W012-    | 1.00     | 0.55     | 0.40     | .20      | 1.00     | 0.45     | -            | 4.0 | -            | 2.8 | -            | 1.1 | -             | .10 | -             | .04 | inches |

| REV | AUTH | DETAILS | Note: Drawing shows typical part after unrestricted recovery, unless otherwise specified. Metric Dimensions Imperial Dimensions |      |     | DRN | SJV | PART DESCRIPTION          | PART No. | REV.            |
|-----|------|---------|---|------|-----|-----|-----|---------------------------|----------|-----------------|
|     |      |         | CKD   | BRHS | ISS |     |     |                           |          |                 |
| B   | BRHS | REDRAWN |   |      |     |     |     | BOOT, STRAIGHT, TWO STAGE | 208W012- | B               |
|     |      |         |   |      |     |     |     |                           |          | SEPTEMBER, 1973 |

© RAYCHEM LIMITED

## (Ordering Information)

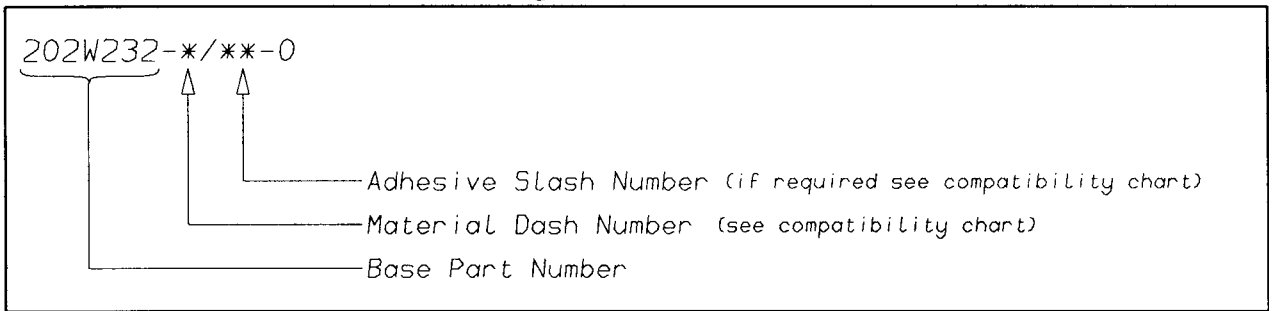

## (COMPATIBILITY CHART)

| MATERIAL DASH NUMBER | MATERIAL DESCRIPTION       | COATING SLASH NUMBER |
|----------------------|----------------------------|----------------------|
| -3                   | POLYOLEFIN, SEMI-RIGID     | /42, /86             |
| -4                   | POLYOLEFIN, FLEXIBLE       | /42, /86             |
| -25                  | ELASTOMER, FLUID RESISTANT | /86, /225            |
|                      |                            |                      |
|                      |                            |                      |
|                      |                            |                      |
|                      |                            |                      |

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,  
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL  
WHEN SPECIFIED BY SUFFIX "-00"  
THEY WILL BE LOCATED AS SHOWN

Raychem  
Electronics OEM Division Europe  
Swindon, Wiltshire, England.  
Telephone: (01793) 528171 Fax: 573923