



- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Hi-Pot: 300V DC/10ms

WSW P/N	Length	⑥PE bag size	⑧PE bag size
AK-AV502	1500±50	130*230*0.05	150*280*0.05
AK-AV503	5000±100	280*330*0.05	360*380*0.05

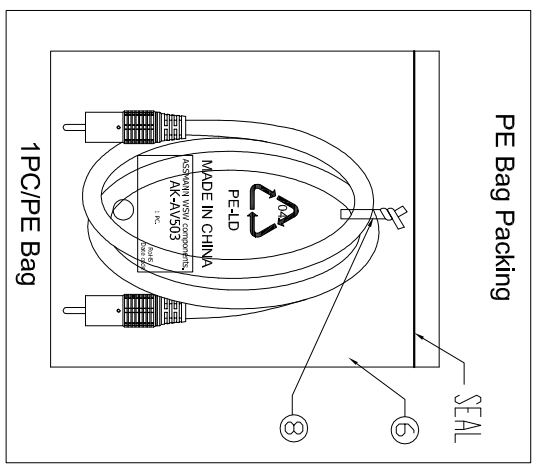

PIN ASSIGNMENT:



NO	NAME	QTY	SPECIFICATION
⑧	TIE	1	BLACK
⑦	PE BAG	1/10	CLEAR PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	TUBE	2	HEAT SHRINK TUBE OD1.5mm L=8mm BLACK
④	SOLDER	0.2g	ROUND TIN OD1.0mm.
③	OUT JACKET	6.33g	PVC 70P COLOR BLACK (MOULD NO.WM-135)
②	CONN	2	RCA PLUG Copper OD13 ID9.3*124.5mm with screw
①	CABLE	1	B.C.22AWG(30/0.12)+AL/MLY+B(16/7/0.12) OD6.0MM JACKET PVC COLOR BLACK L=5000+30-0mm.

RoHS compliant
Unit:mm

Scale	Free	Id.	Modification	Date	Name
TOLERANCE			Drawn	20.02.2017	Amy
DIM	TOL				
Angle	TOL				

Drawn	Date	Name	Customer-No.	Drawing-No.	Replace
Drawn	20.02.2017	Amy	ASSMANN WSW-No.	AK-AV50X	
Approved	20.02.2017	Amy			
				ASS 7851 CA	rev00
					Sheet

1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B
H	G	F	E	D	C	B