
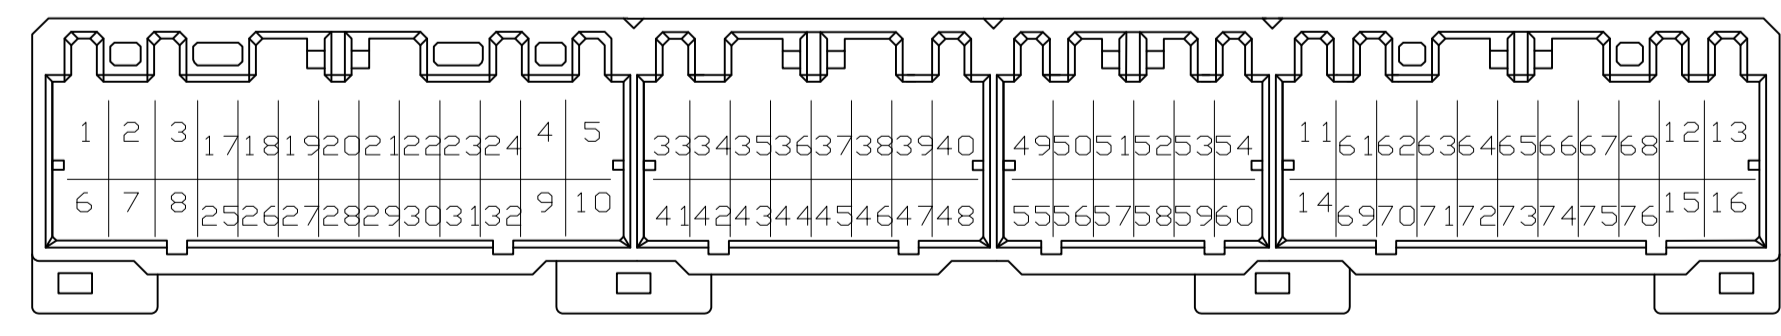
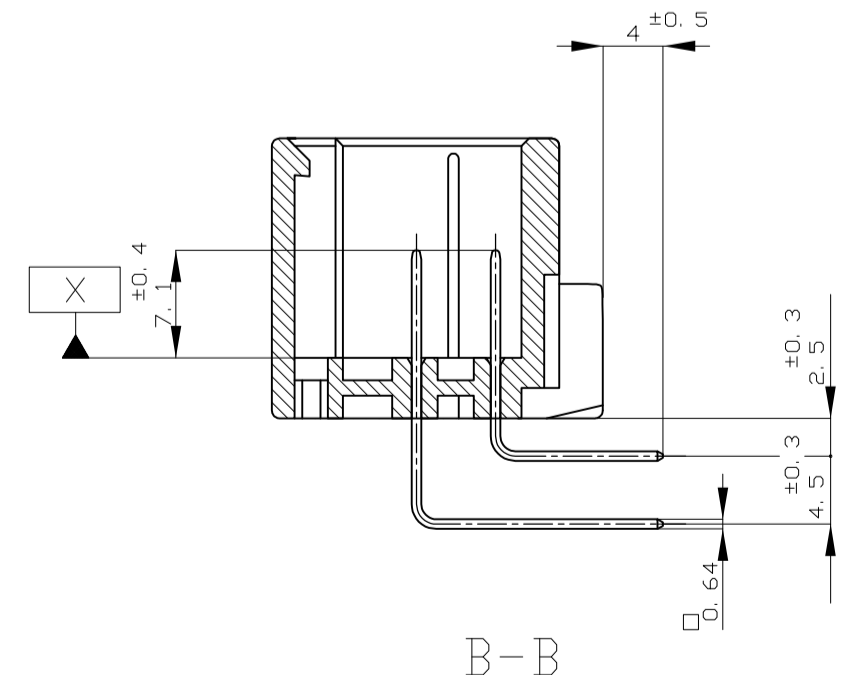


- △ X 面から2mmの範囲で測定
- 2. 嵌合相手ハジツタ型: 174516, 174515, 174514, 174913
917992, 917989, 917981, 917975
- 3. 推奨取付ねじ: JIS B1115, B1122 タップねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N・cm以下)
- 4. 適用製品規格番号: 108-5280, 108-5342
- △ 回路番号: 右図参照のこと
- パワ回路 ① ~ ⑩
- シグナル回路 ⑪ ~ ⑮
- △ 適用製品規格のプリフィックス及びIDマークを
カマートマークにて表示

- △ MUST BE KEPT BETWEEN X AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174516, 174515, 174514, 174913
917992, 917989, 917981, 917975
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122
- < TIGHTENING TORQUE; 0.4N・m MAX. >
- 4 APPLICABLE PRODUCT SPEC NO. 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIRCUIT NO. ① ~ ⑩
- SIGNAL CIRCUIT NO. ⑪ ~ ⑮
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

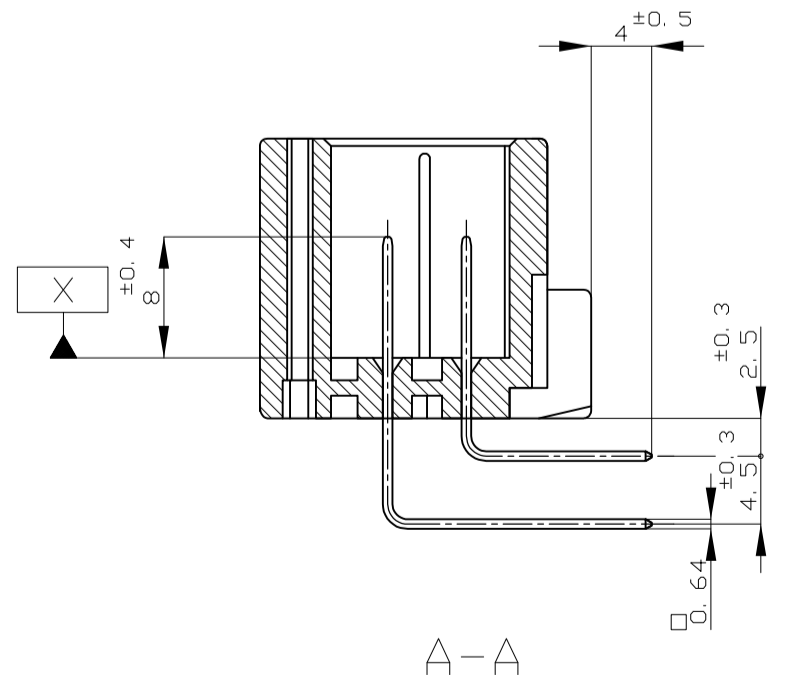

MARKING	PRE-TIN	SELECTIVE-TIN	SELECTIVE GOLD	POWER CIRCUIT NO.	SIGNAL CIRCUIT NO.	COLOR	PART NUMBER
△ 56	PRE-TIN × 62	SELECTIVE GOLD × 14	-	24, 31, 39, 40	42~50, 55	GRAY	6-5178780-6
△ 55	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	BLACK	5-5178780-2
△ 55	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	NATURAL	5-5178780-1
△ 54	PRE-TIN × 48	SELECTIVE GOLD × 28	-	23, 24, 31~51	55~57, 63, 64	YELLOW	4-5178780-7
△ 54	PRE-TIN × 68	SELECTIVE GOLD × 8	-	49, 50, 52, 53, 68	70, 71, 74	GRAY	4-5178780-6
△ 53	PRE-TIN × 64	SELECTIVE GOLD × 12	-	26~32, 40, 49~52	-	YELLOW	3-5178780-7
△ 53	PRE-TIN × 16	SELECTIVE GOLD × 60	-	17~76	-	GRAY	3-5178780-6
△ 52	PRE-TIN × 52	SELECTIVE GOLD × 24	9	23, 24, 31, 33~49	55, 63, 64	YELLOW	2-5178780-7
△ 52	PRE-TIN × 57	SELECTIVE GOLD × 19	-	22, 24, 31, 34, 39~40	42~48, 49, 50, 55, 56, 63, 64	GRAY	2-5178780-6
Ⓞ OBSOLETE	PRE-TIN × 76	SELECTIVE GOLD × 7	-	-	-	NATURAL	9-178780-1
△ 8	PRE-TIN × 69	SELECTIVE GOLD × 10	-	49, 50, 52, 53, 68	70, 74	GRAY	8-178780-6
△ 7	PRE-TIN × 66	SELECTIVE GOLD × 10	-	24, 31, 39, 44~47	49, 55, 64	GRAY	7-178780-6
△ 6	PRE-TIN × 62	SELECTIVE GOLD × 14	-	24, 31, 39, 40	42~50, 55	GRAY	6-178780-6
△ 5	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	YELLOW	5-178780-7
Ⓞ OBSOLETE	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	GRAY	5-178780-6
△ 5	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	BLACK	5-178780-2
△ 5	PRE-TIN × 48	SELECTIVE GOLD × 28	-	25~32, 35~40	43~52, 55~58	NATURAL	5-178780-1
△ 4	PRE-TIN × 48	SELECTIVE GOLD × 28	-	23, 24, 31~51	55~57, 63, 64	YELLOW	4-178780-7
△ 4	PRE-TIN × 68	SELECTIVE GOLD × 8	-	49, 50, 52, 53, 68	70, 71, 74	GRAY	4-178780-6
△ 4	PRE-TIN × 68	SELECTIVE GOLD × 12	-	26~32, 40, 49~52	-	YELLOW	3-178780-7
△ 3	PRE-TIN × 64	SELECTIVE GOLD × 60	-	17~76	-	GRAY	3-178780-6
△ 3	PRE-TIN × 52	SELECTIVE GOLD × 24	9	23, 24, 31, 33~49	55, 63, 64	YELLOW	2-178780-7
△ 2	PRE-TIN × 57	SELECTIVE GOLD × 19	-	22, 24, 31, 34, 39~40	42~48, 49, 50, 55, 56, 63, 64	GRAY	2-178780-6
△ 2	PRE-TIN × 76	SELECTIVE GOLD × 7	-	-	-	LIGHT GRAY	178780-9
△ 1	PRE-TIN × 76	SELECTIVE-TIN (BRIGHT) × 76	-	-	-	NATURAL	178780-3
△ 0	PRE-TIN × 76	SELECTIVE-TIN (BRIGHT) × 76	-	-	-	NATURAL	178780-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

GENERAL TOLERANCE

MATERIAL: HOUSING: PBT CONTACT: BRASS

FINISH: 仕上

SEE TABLE

APPROVED: K. BETSUJI

PRODUCT SPEC: 製品規格

APPLICATION SPEC: 取付適用規格

WEIGHT

CUSTOMER DRAWING

SCALE: 2:1

SHEET: 1 of 1

REV: P7

STE TE Connectivity

76POS CAP HOUSING ASSY
.040/.070 SERIES HYBRID I/O CONN. (NON FLANGE)

00779 178780