


Extended length is with 500g of force

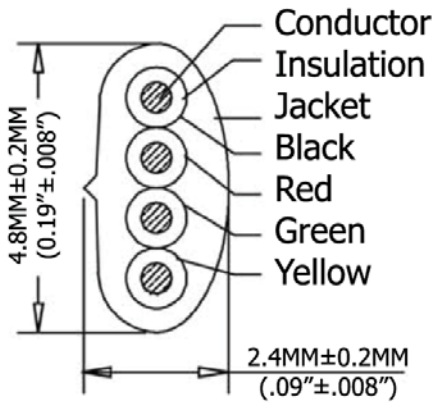

SEC:A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	33.5 Inches
4,267.2MM-4,907.28MM	850.9MM

**Material:**

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	12.19.11	<b>AT-K-C-26-4-W/14</b>
X.X	±0.40				Approved		
X.XX	±0.25						NON-UL 26AWG (0.16/7)*4C, O.D.: 2.4*4.8MM, Pre-Cut, 14Ft., White
X.XXX	±0.15						Drawing No.
Angle	±3°						<b>rev00</b>
							Replace
							Sheet
		Modification	Date	Name			