

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 650 STR/FLEX |
| Wire Type | Stranded Copper: Locomotive |
| Wire Strip Length | 3.0 in. |
| Stud Size | 1/2 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90 ° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | BLACK |
| Panduit Die Index No. on Barrel | P106 |
| Alternate Industry Die Index No. () on Barrel | (24) |


Dimensions are in inches



CERTIFIED



LISTED
Wire Connector

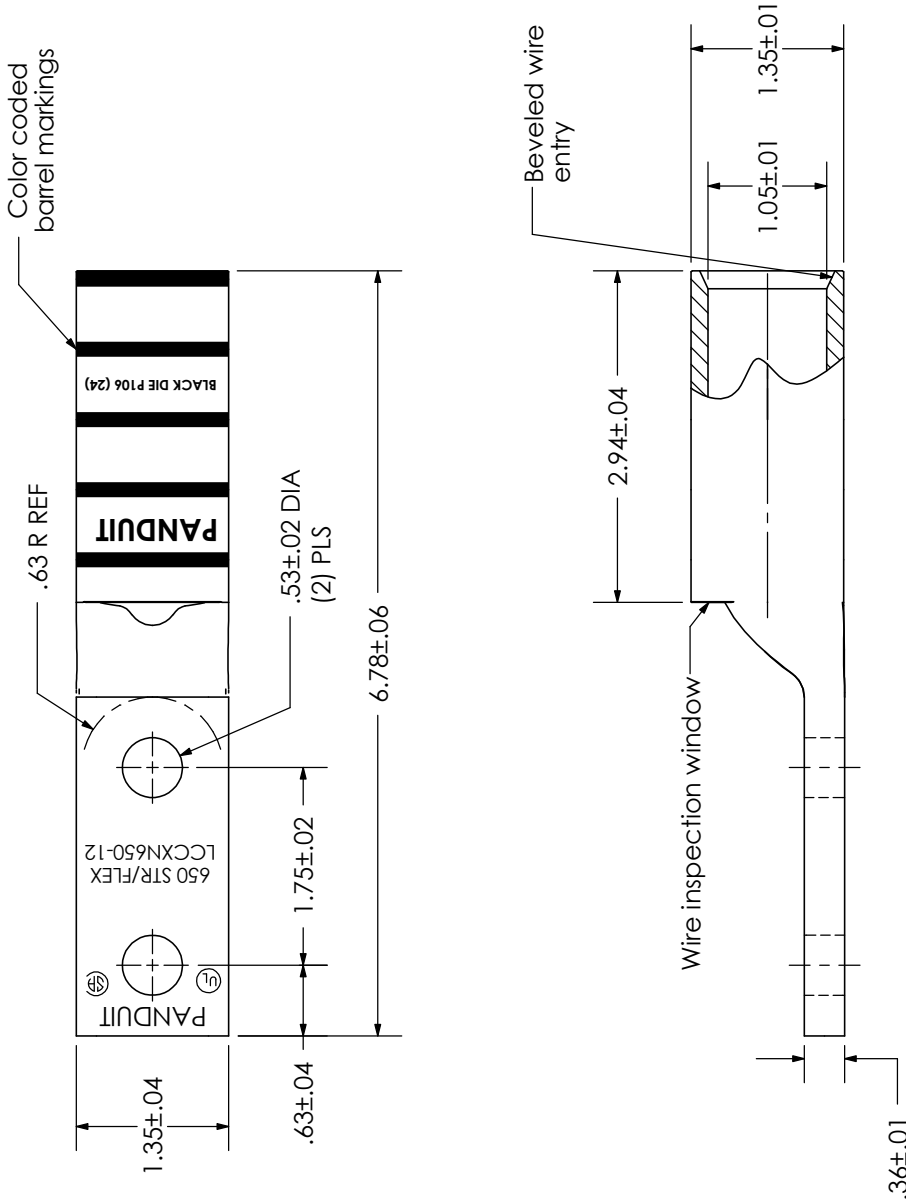

| | | | |
|----------------|------|--|------|
| PANDUIT | | PANDUIT CORP. TINLEY PARK, ILLINOIS | |
| | | LCCXN650-12-6 | |
| | | Copper Lug - Two-Hole, Narrow Tongue, Standard Flex Barrel | |
| REV | DATE | BY | CHK |
| 03 | 5/10 | JHNU | JHNU |
| | | REMOVED WARRANTY & CUSTOMER SIGNATURE NOTE | |
| | | DESCRIPTION | |
| | | ECN | |
| | | SCALE N/A | |
| | | DRAWING NO / CAD FILE | |
| | | LCCXN650-12-CUST | |