











MODEL:

PDU3VN6L2130B


3-Phase Monitored 0U Vertical PDU

- 
**200-240V
3-Phase Input**
- 
**NEMA
L21-30P
Plug**
- 
**200-240V
Single-Phase
Output**
- 
48 Outlets
- 
**10kW Load
Capacity**
- 
**Multi-
Function
Meter**
- 
**Network
Interface**
- 
**0U
Vertical**
- 
**Toolless
Mounting
Buttons**



- A** Multi-Function Meter
- B** C13 and C19 Outlets with Multi-Function Bank LEDs
- C** C13 and C19 Plug Inserts
- D** Removable Mounting Brackets
- E** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- F** 6 ft. Input Power Cord
- G** NEMA L21-30P Input Plug
- H** Durable Metal Case
- I** Network Interface
- J** RJ45 Ethernet Jack
- K** Manual Configuration Port
- L** Environmental Monitoring Port
- M** Network Interface Reset Button



G AC Input Connection: Insert NEMA L21-30P plug into compatible utility, generator or UPS outlet.




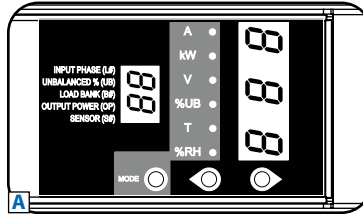


A Multi-Function Meter: Display the load for each phase, bank or total output; displays temperature or humidity*; displays the IP address or rotate the display 180°.

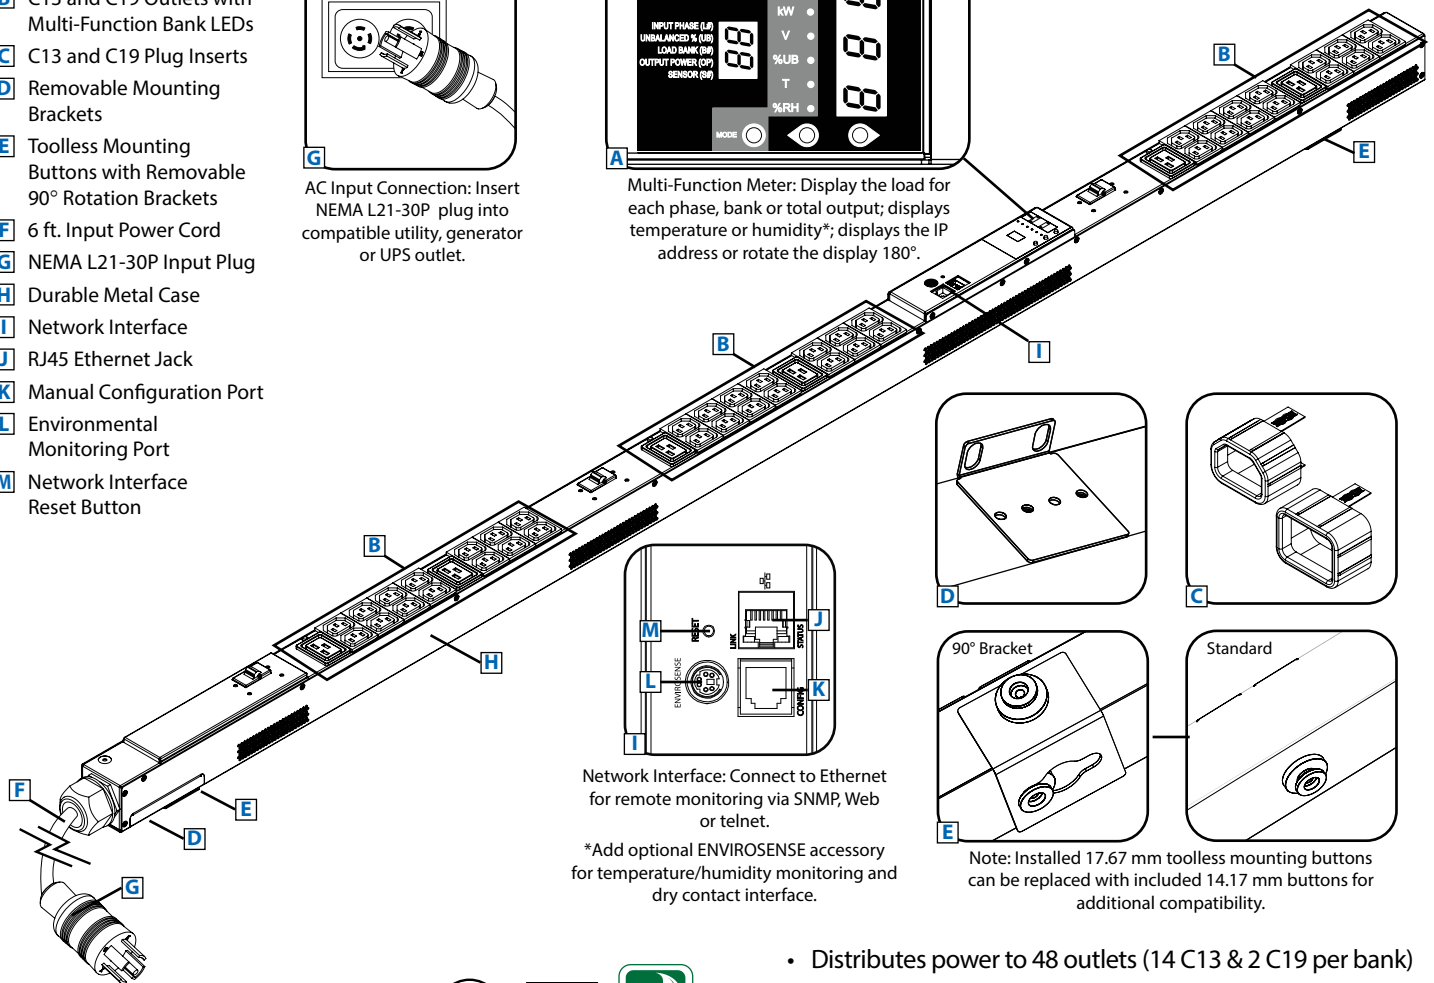

I Network Interface: Connect to Ethernet for remote monitoring via SNMP, Web or telnet.

*Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Model	PDU3VN6L2130B
Voltage	200/208/240V 3-Phase Input/Single-Phase Output
Frequency	50/60 Hz
Load Capacity	10kW (240V), 9.6kW (230V), 9.1kW (220V), 8.6kW (208V), 8.3kW (200V)
Input Plug	NEMA L21-30P
Input Cord Length	6 ft. 1.8 m
Outlets	48 (42 C13 / 6 C19)
Primary Mounting Option	0U (Vertical)
Unit Weight & Dimensions	15.7 lb. / 70 x 2.17 x 2.59 (HxWxD in inches) 7 kg / 1778 x 55 x 66 (HxWxD in mm)
Standards	Tested to UL/CSA 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS, TAA Compliant









- Distributes power to 48 outlets (14 C13 & 2 C19 per bank)
- Remote monitoring and control via SNMP, Web or telnet
- Displays load for each **bank, phase and total output** in real time with 1% billing-grade accuracy
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

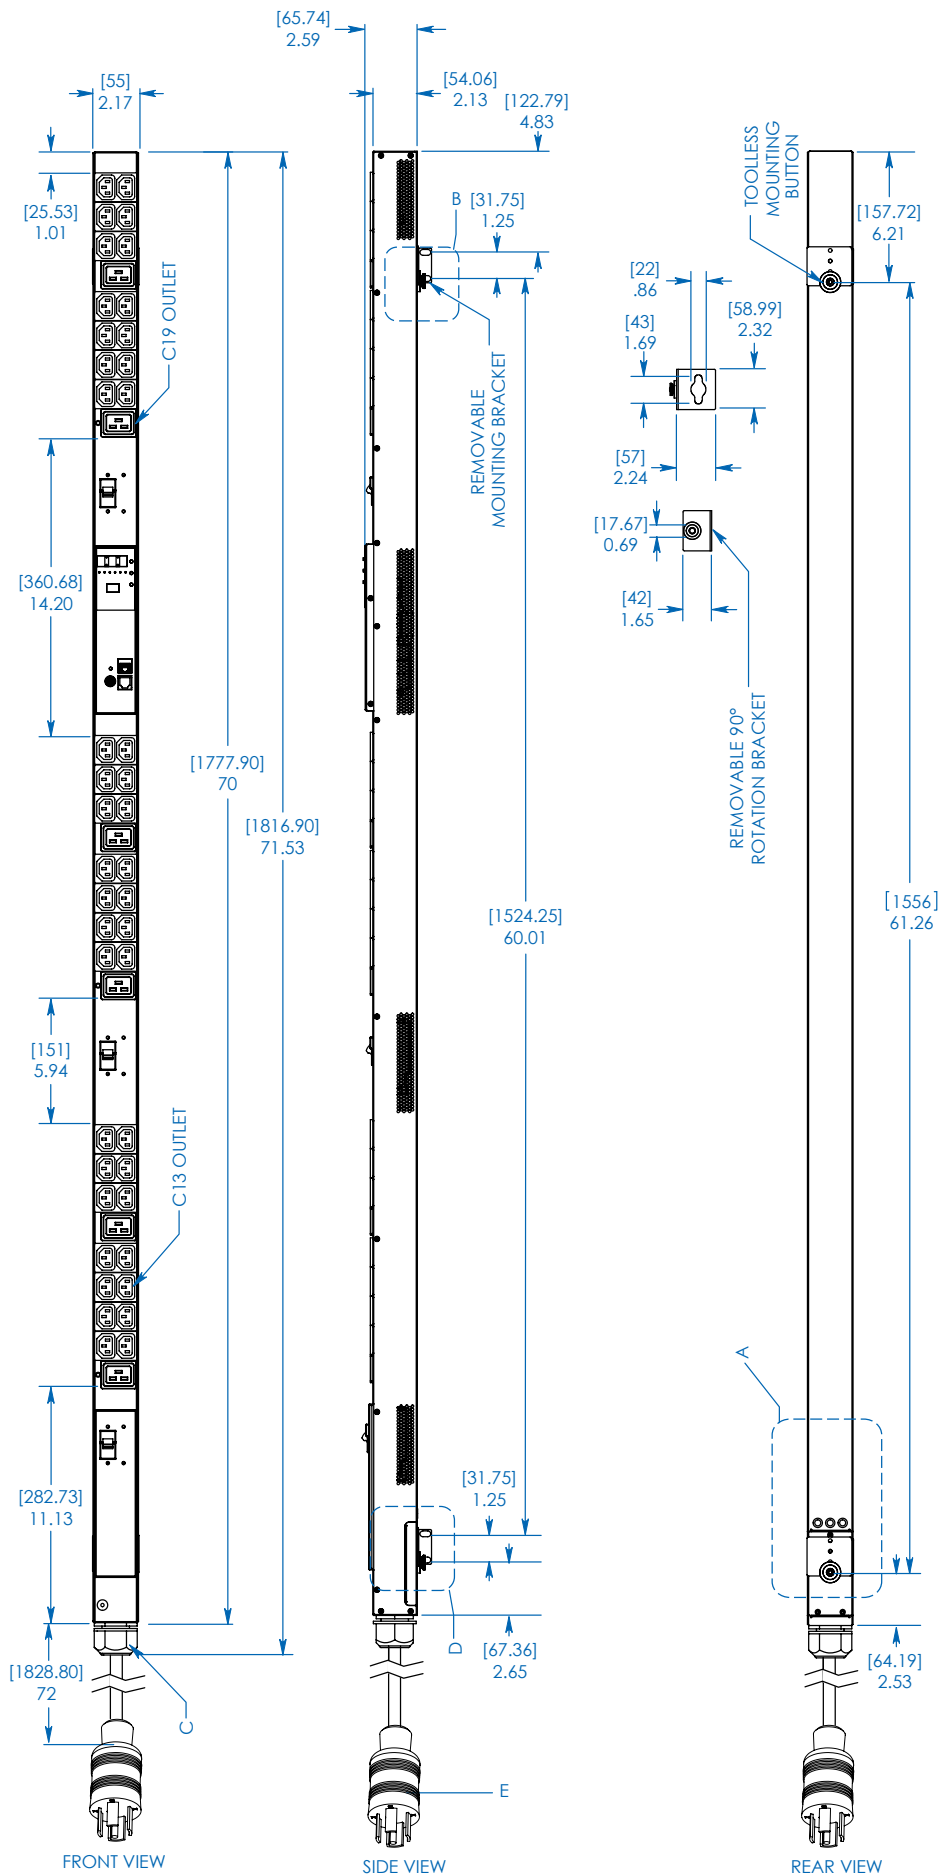

MODEL:
PDU3VN6L2130B



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.