



REV.	DATE	ECR NO.	DESCRIPTION
A	04/27/99	-	MODIFY FERRULE/ ADD NOTES 1 AND 2
B	09/29/04	-	MODIFY FERRULE AND CRIMP NOTES
C	09/17/08	-	ADD FLAT TO BODY/ REVISE FERRULE DIMENSIONS/ ADD NOTE 3 REVISE CABLE DESCRIPTION TO 316/U DB CABLE

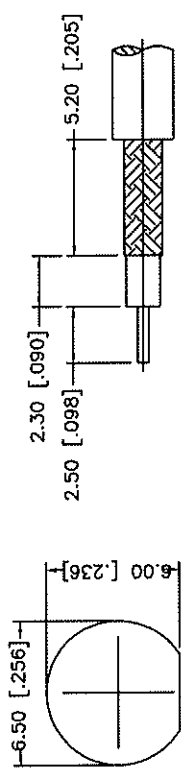

RECOMMENDED MOUNTING HOLES

RECOMMENDED CABLE STRIPPING DIM'S

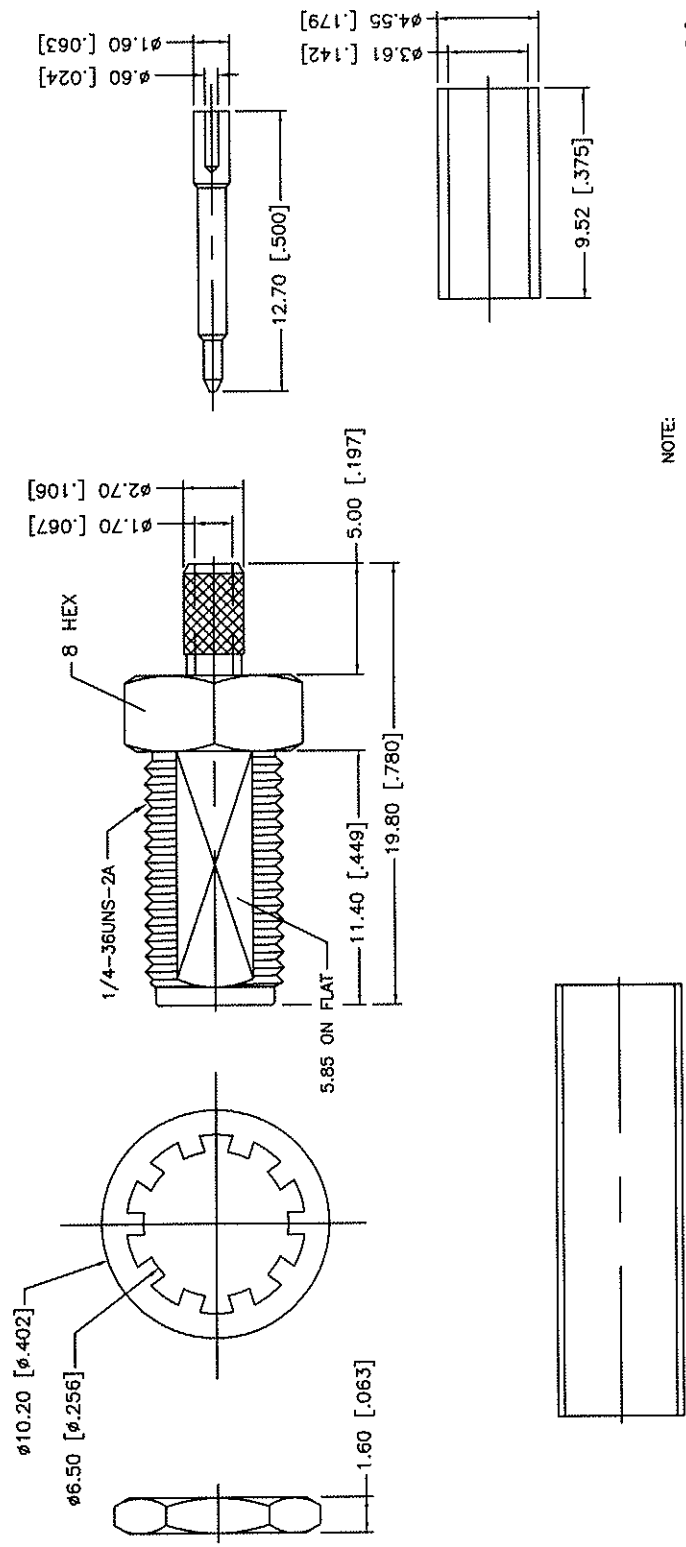

NOTE:






1. CRIMPED FERRULE HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS OF 3.20 [1.26"]

APPROVALS		DATE	
DRAWN	GRS	09/17/08	
CHECKED			
ISSUED			
SHEET	1 OF 1		
CAD FILE C:/132/132176RP.DWG			
DO NOT SCALE DRAWING			
DESCRIPTION	MATERIAL	FINISH	QTY
HEAT SHRINK TUBING			
FERRULE	COPPER	GOLD	1
HEX NUT	BRASS	GOLD	1
LOCK WASHER	BRASS	GOLD	1
CONTACT PIN	BRASS	GOLD	1
INSULATOR	PIPE	NATURAL	1
BODY	BRASS	GOLD	1
PART DESCRIPTION			
SMA REVERSE POLARITY BULKHEAD			
CRIMP JACK (FOR 316/U DOUBLE BRAID CABLE)			
PART NO. 132176RP			
DWG. NO. 132176RP.DWG			
REV. NC			
SIZE A			
SCALE NA			

Amphenol Connex

9/16/08

REVISIONS	
ISS	ZONE
	DESCRIPTION PER REQUEST DATE

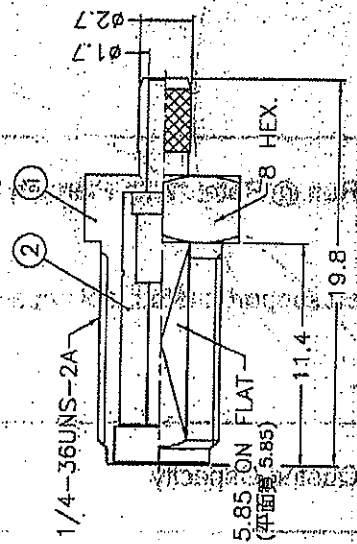

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - BRASS PER QQ-B-613
 - GOLD PL. 3 MIN. THICK, OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468

- CRIMPED FERRULE HEX CRIMP SIZE .151
- CONTACT PIN TO SOLDER
- MAX. PANEL THICKNESS = 3.2mm



NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	ISSUE	1	2	3	4	5	6	7	8
7	HEAT SHRINK TUBING	BLACK		1	HT-56/5X193										
6	FERRULE	COPPER	NOTE 3	1	3A-1357-B										
5	CONTACT PIN	NOTE 1	NOTE 4	1	RSMA6111A2-3										
4	HEX NUT	NOTE 1	NOTE 3	1	HNB-5/4-36X16										
3	LOCK WASHER	NOTE 2	NOTE 3	1	LW-102/65X05										
2	INSULATOR	NOTE 5	NATURAL	1	SMAT000-2T-50										
1	BODY	NOTE 1	NOTE 3	1	SMAG411A2-1										
					27/17										

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED	
TOLERANCES	
0.5-6	±0.2
6-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4


PART NO.	
138176RP	
APPROVED	DATE 11-25-02
CHECKED	DATE 11-25-02
DRAWN	DATE 11-25-02
FILE NO. F:\DWG\RSMA\6411A2\004\50\3GT50G	

Amphenol	
Dorbury, CT, USA - London, London - Shenzhen, China	
TITLE SMA REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RC-3164/4)	
DRAWING NO.	RSMA6411A2-004-3GT50G-50
ITEM NO.	616411AAK35CA5F





Old



RECOMMENDED MOUNTING HOLE



RECOMMENDED CABLE STRIPPING DIM'S

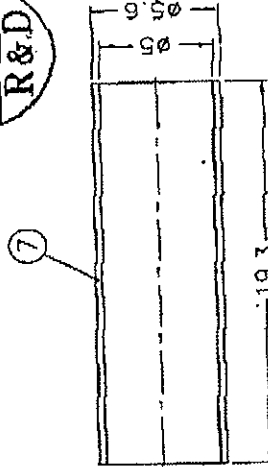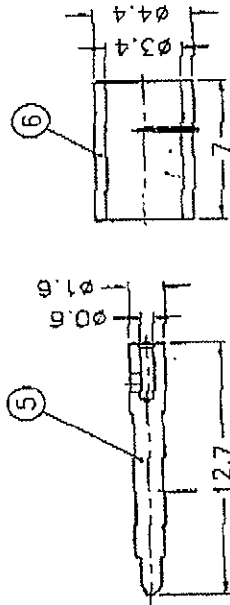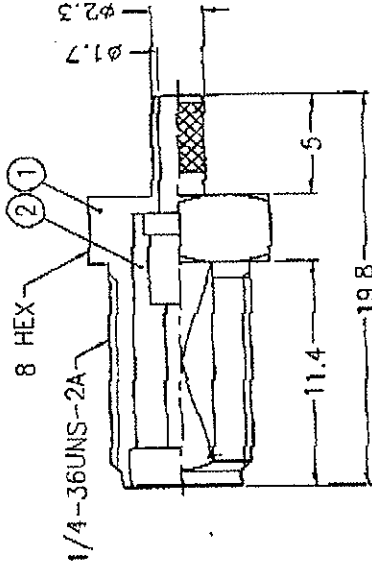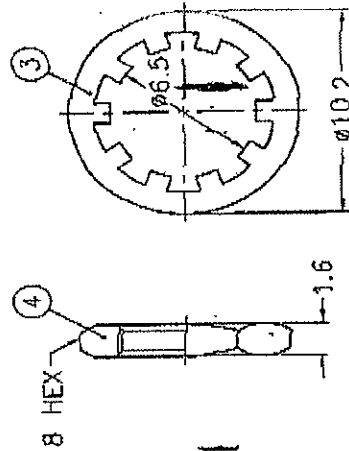

- NOTES: 1. PER KAI JACK SPEC. EP-SS-9700
- 2. BRASS PER QQ-B-826
- 3. STAINLESS STEEL PER QQ-S-764, TYPE 303
- 4. BRASS PER QQ-B-813
- 5. TEFLON MIL-P-19468

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
7	HEAT SHRINK TUBING				HT-56/SX193
8	FERRULE	COPPER	NOTE 1	1	FR-44/34X7C
9	CONTACT PIN		NOTE 4	1	RSMAG11A2-3-15/06
4	HEX NUT		NOTE 2	1	JNB-1/4-35X16
3	LOCK WASHER		NOTE 3	1	LW-102/65X05
2	INSULATOR		NOTE 5	1	SMA7000-2T-50
1	BODY		NOTE 2	1	SMA641A2-1-23/17-C

REVISIONS	ISS	ZONE	DESCRIPTION	APPROVED	DATE
	B	B-1	NO.6 WAS CHANGED	TONY	05-08-98
	A	A-1	NO.1 WAS CHANGED	TONY	05-18-98

SCALE	3/1	ISSUE	B

APPROVED	DATE
<i>Ask. C</i>	07-01-98
CHECKED	DATE
<i>Ask. C</i>	07-01-98
DRAWN	DATE
<i>Ask. H</i>	07-01-98

KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.
132176 RP
CRIMP PINK Reverse Polariz-0
SMA REVERSE BULKHEAD CRIMP JACK
316 PDL OVER B B L A I D
132176 RP
KJ-RSMA641A2-316U/D-50
FILE NO. F:\DWG\RSMA\641A2\316UD-50

NO. 205 P. 0 8 SMA-R1559