

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC AF DIST 50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
G		REVISED PER ECR-12-013445	18OCT12	KH	PD

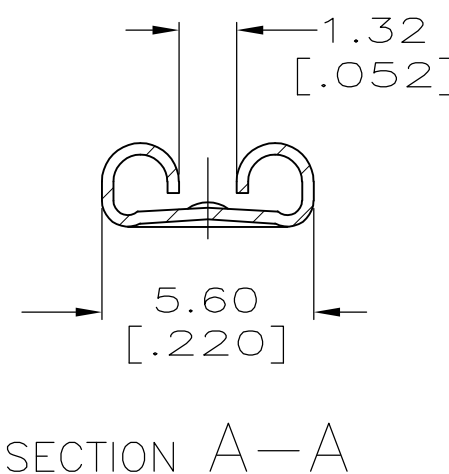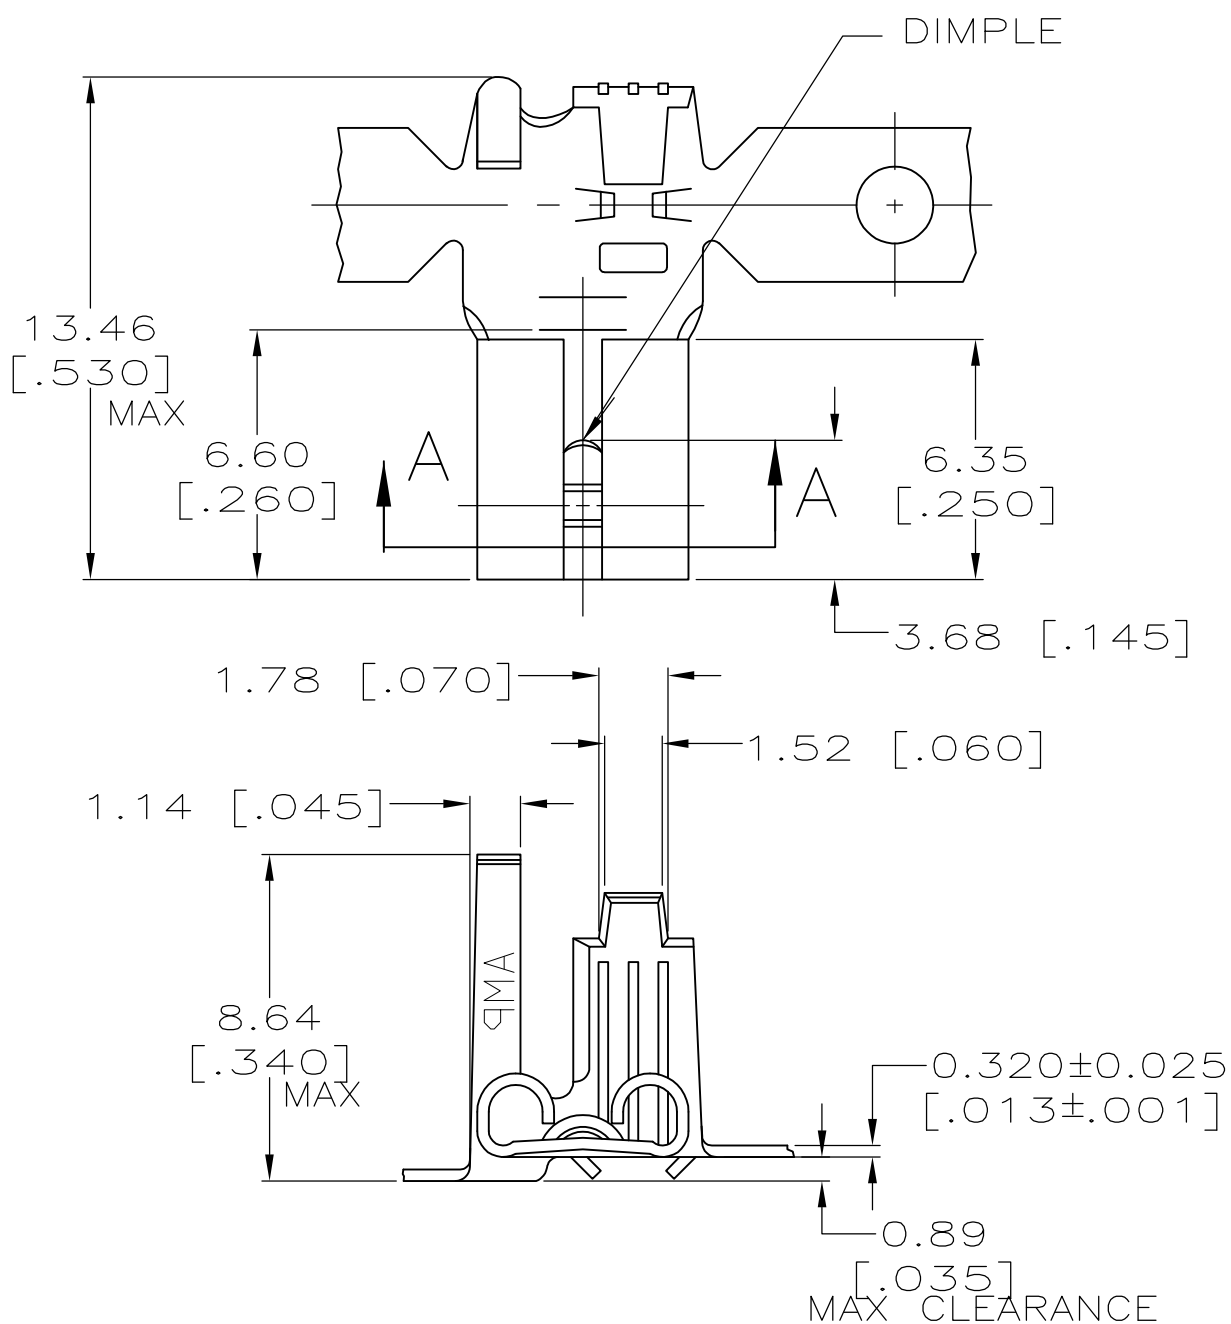

- 1 CONTINUOUS STRIP ON REELS.
- 2 ACCEPTS [#20-#16] AWG WIRE.
- 3 INSULATION RANGE TO BE 2.79-4.32 [.110-.170] DIA.
- 4 MATING TAB THICKNESS TO BE 0.51±0.025 [.020±.001]
- 5 FEED TO BE 16.38±0.13 [.645±.005]
- △6 PREPRODUCTION - FASR REQUIRED

TIN	H04 PHOS BRONZE	△6 42618-3
TIN	BRASS	42618-2
-	BRASS	42618-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 1/25/96	<b>TE Connectivity</b> RECEPTACLE, FASTON, FLAG, MOLDABLE, 4.75 [.187] SERIES				
DIMENSIONS: MM [ INCHES ]		CHK P FORTNEY 1/25/96				NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P DESANTIS 1/25/96				SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.38 [.015] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -				A3 00779 C-42618	
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT -	SCALE 5:1 SHEET 1 OF 1 REV G			
CUSTOMER DRAWING							