

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 1 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | 1Y |
| Termination type | HV contact |
| IP rating | 50 |
| Cable Ø | 4.30 - 5.10 mm |
| Matching parts | ERA.1Y.405.CTA |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FFA*: Straight plug with cable collet |
| Keying | Circular (can rotate) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | C52: 4.3 - 5.1 mm |
| Variant | |

Performance

| | |
|---------------|---------|
| Configuration | |
| Insulator | T: PTFE |
| Rated Current | 8 Amps |


Specifications

| | |
|----------------------|--------|
| Contact Type: | Solder |
| Test voltage (kV DC) | 10.5 |
| Test voltage (kV AC) | 7.5 |
| Creepage dist. (mm): | 16 |

Others

DRAWINGS

Draws

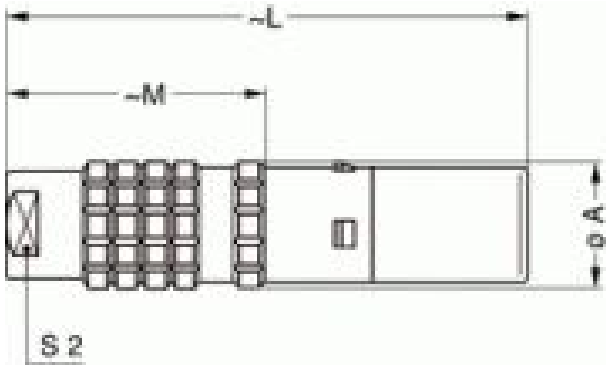

Dimensions

| | A | L | M |
|-----|------|------|------|
| mm. | 13 | 67 | 30.5 |
| in. | 0,51 | 2,64 | 1,20 |

RECOMMENDED BY LEMO

Tools

None

Cables