


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	-	A	RELEASED	07MAY10	BB JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
- 2 MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

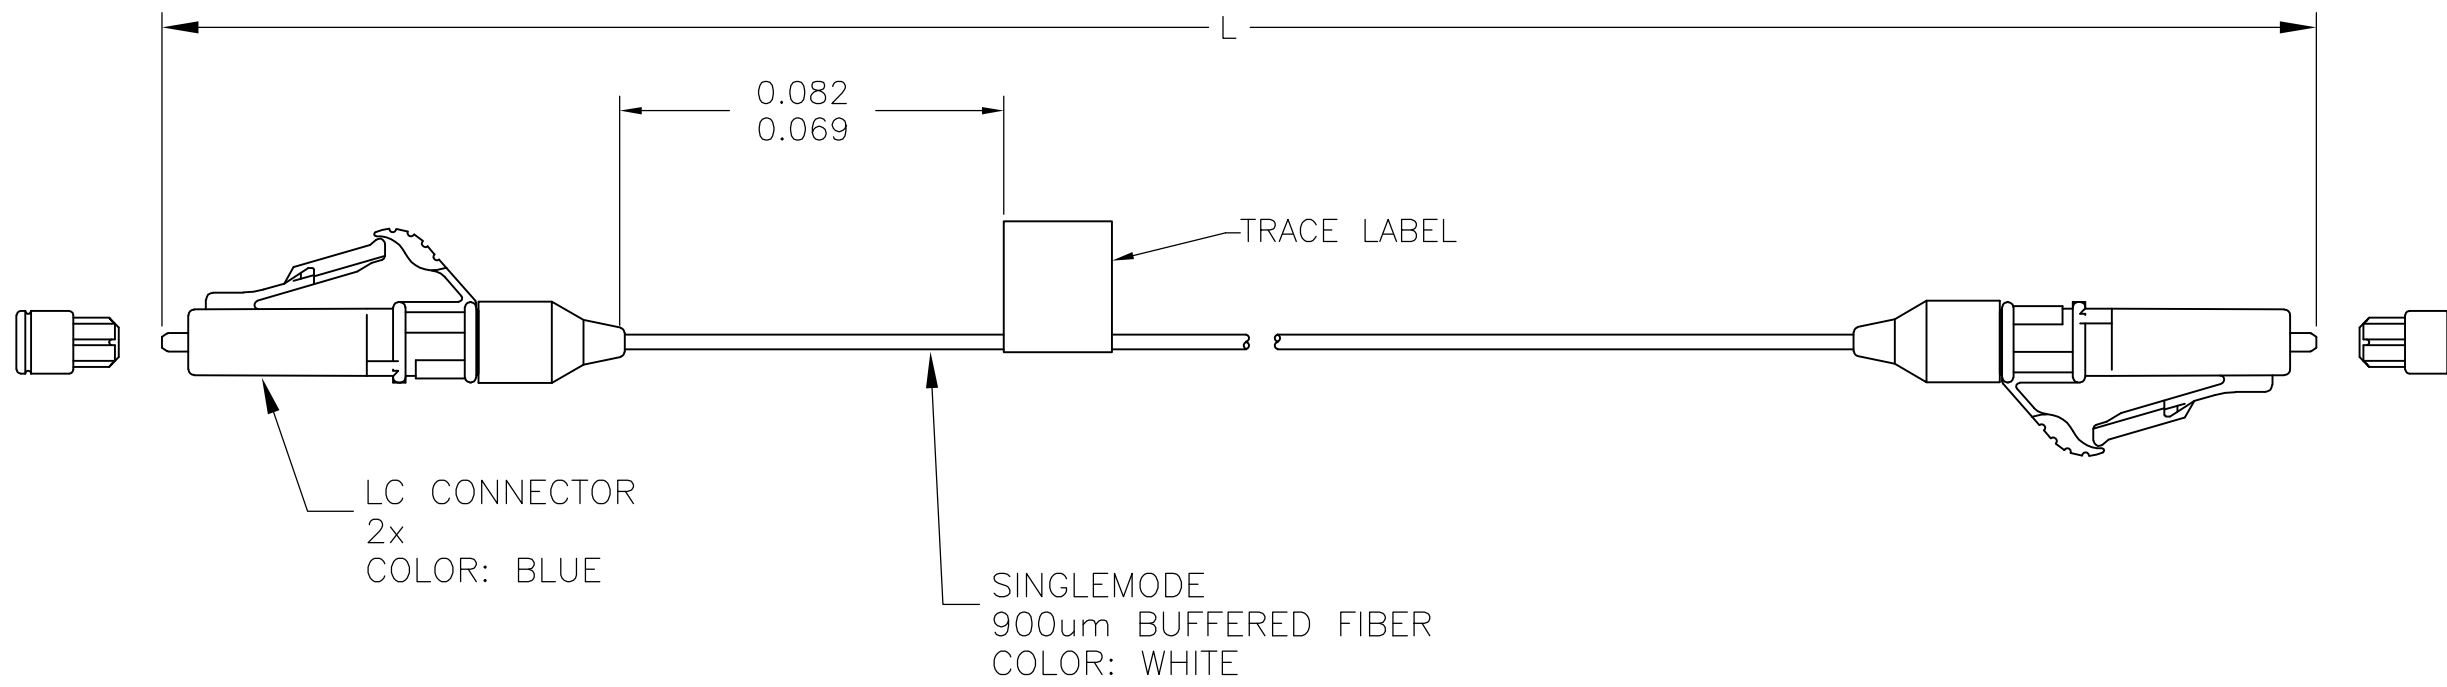

MAX IL (dB)	L METERS [INCHES]	PART NUMBER
0.20	5.00±0.08 [196.90±3.00]	2064843-5
0.20	4.00±0.08 [157.50±3.00]	2064843-4
0.20	3.00±0.05 [118.10±2.00]	2064843-3
0.20	2.00±0.05 [78.70±2.00]	2064843-2
0.20	1.00±0.05 [39.40±2.00]	2064843-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 07MAY2010	Tyco Electronics Corporation Harrisburg Pa, 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 07MAY2010		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 07MAY2010	NAME CABLE ASSY, FIBER OPTIC, 900um, SM LC TO LC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	-	
MATERIAL -		FINISH -	APPLICATION SPEC -	RESTRICTED TO -
		WEIGHT -	SIZE A3	CAGE CODE 00779
		DRAWING NO C-2064843		SCALE NTS
		CUSTOMER DRAWING		SHEET 1 OF 1
				REV A