


REV. 0
DCO 143268

COIL: @ 25°C
 RESISTANCE 1350 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE & RELEASE 4 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

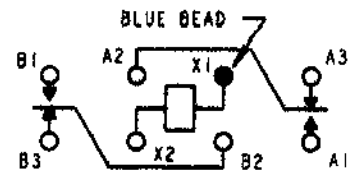

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. BSH 10/17/01 CK.TLG 10-18-01



CUST. GPL
 CUST. NO. M39016/13-066L REV. _____
 "3SBC" RELAY

3SBC1512A2