

## Housing - VC-MP-T1-Z-M20 - 1886676

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Powder-coated sleeve housing, with metric cable entry, locking screws with cylinder head



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	219.2 GRM
Custom tariff number	85389099
Country of origin	Poland

### Technical data

#### Dimensions

Height	65 mm
--------	-------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

#### General

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Type	VC1
Housing type	Sleeve housings
Color	gray
Locking type	Screw locking, cylinder head
Tightening torque, mounting screw	1.5 Nm $\pm$ 0.3 Nm
No. of cable outlets	1
Cable exit	Angled
Screw connection	none
Type of the screw connection	M20

## Housing - VC-MP-T1-Z-M20 - 1886676

### Technical data

#### General

Housing material	Zinc die-cast
Housing surface material	Powder coating
Seal material	EPDM
Material of locking screw	V2A

### Classifications

#### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27371205
eCl@ss 5.1	27371205
eCl@ss 6.0	27371205
eCl@ss 7.0	27371205
eCl@ss 8.0	27440202

#### ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437


#### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502


### Drawings

# Housing - VC-MP-T1-Z-M20 - 1886676

Dimensioned drawing

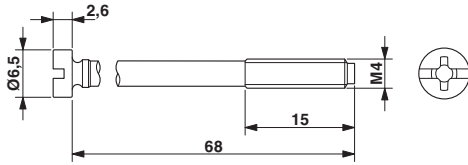

Dimensioned drawing

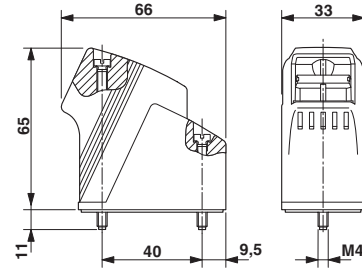

Dimensioned drawing

