MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-ENCLOSED

102ML1 5

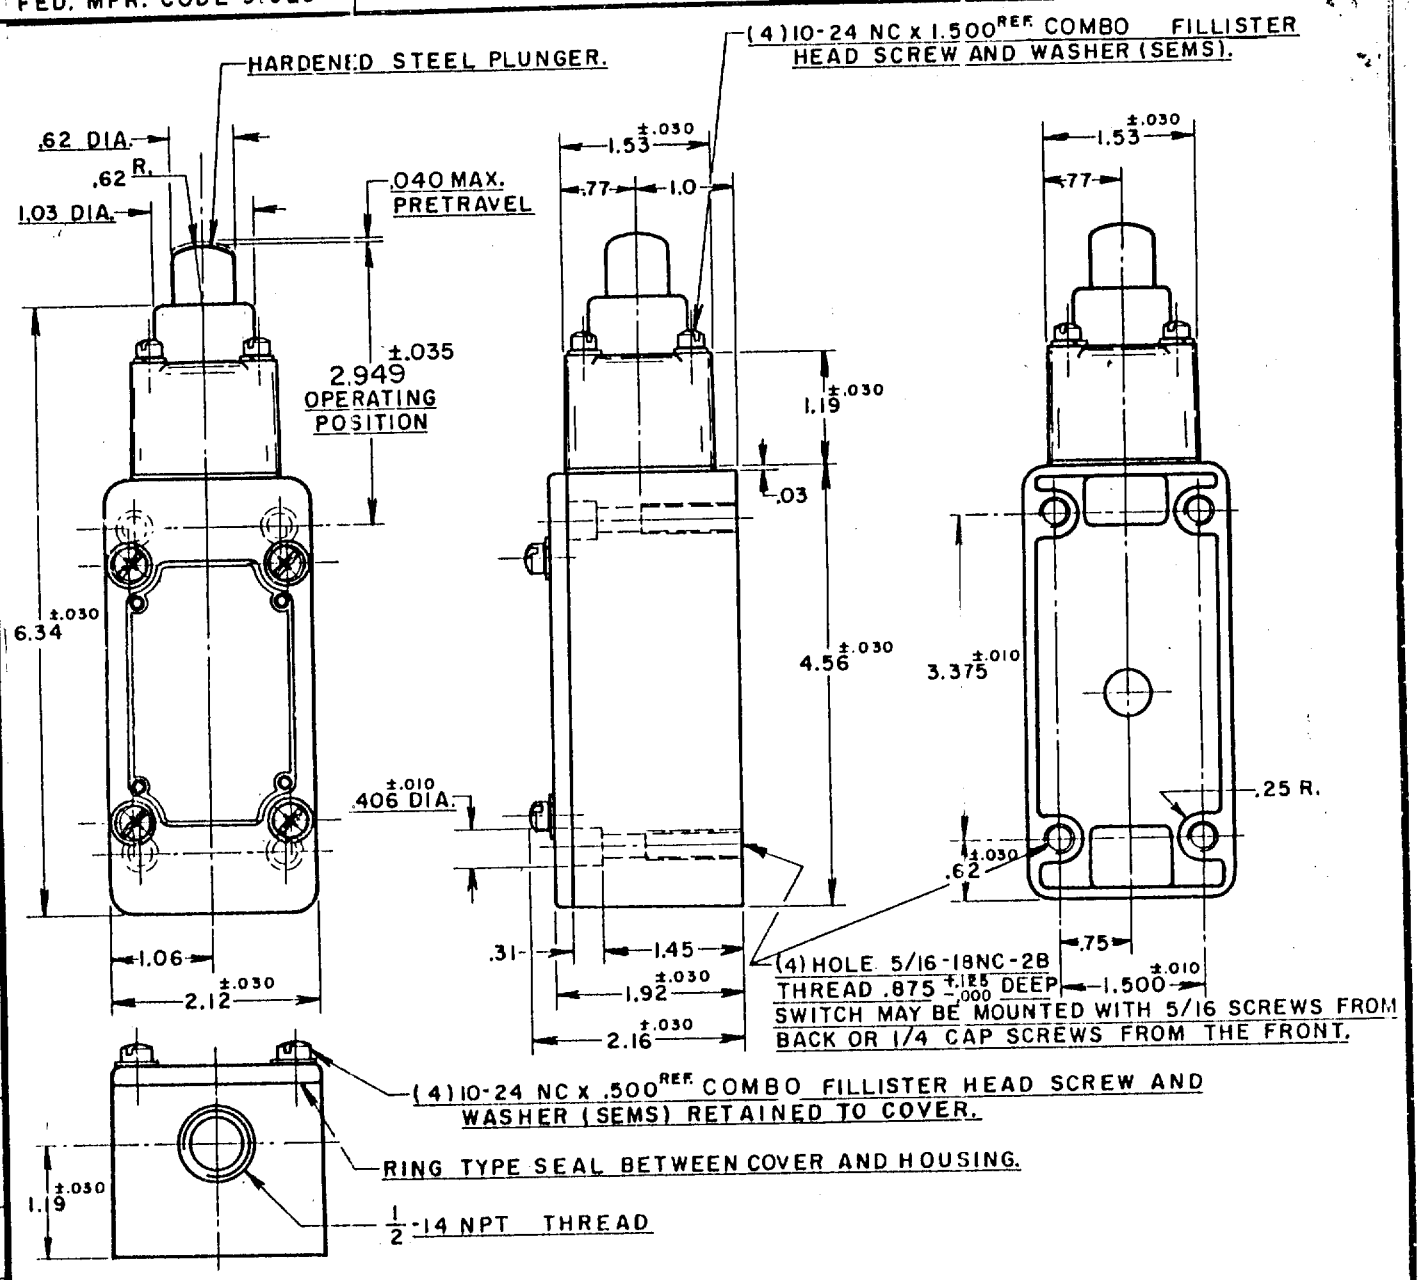

NOTE-

1-IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	6 LB. APPROX.
RELEASE FORCE	4 LB. APPROX.
DIFFERENTIAL TRAVEL	.020 MAX.
OVERTRAVEL	.500 MIN.
SWITCH-BASIC REPLACEMENT	1MNI
FREE PLAY	.010 MAX.

ELECTRICAL DATA (1MNI BASIC)

CONTACT ARRANGEMENT	BREAK DISTANCE
TWO CIRCUIT DOUBLE THROW DOUBLE BREAK	

(B) 10A-120,240,480, OR 600 VAC
1/2 HP-120 VAC; 1 HP-240 VAC
0.8 A-115 VDC; 0.4 A-230 VDC
PILOT DUTY: 600 VAC MAX

UL CSA

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

DRAWN O.M.W. 3 MAR 58 CHECK G.C.H. 12 MAR 58 CHECK J.W.M. 10 MAR 58 CHECK REPLACES (M)102ML1 ISSUE 4 RELEASE NO. NUMBER

FO-50378