

### Micro-switch



#### With cable and connector



For "live insertion" applications. Installation in injector/extractor handles, types IV, IVs and VII.

#### Supply includes:

Micro-switch, connector type Molex 51021-0300, mounting clips, 3 cables, 25 mm x #32 AWG, fully assembled.

Packs of	Order No.
1 set	<b>3686.536</b>

- 1 Lever not depressed
- 2 Lever hinge
- 3 Lever contact point

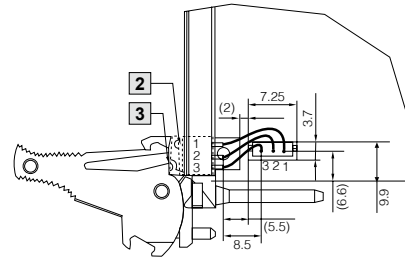

### Micro-switch mounting clip



For mounting micro-switches in handles.

Packs of	Order No.
10	<b>3684.411</b>

### Plastic covers



#### For PCBs

For mechanical protection of the component side and of the EMC gaskets. Attachment holes as per CPCI or VME-specifications. Optionally available as perforated or solid version.

#### Material:


0.3 mm plastic, anti-static  
Maximum temperature up to 65°C

<sup>1)</sup> 0.5 mm plastic, transparent, anti-static  
UL 94-V0, maximum temperature up to 65°C

<sup>2)</sup> 0.5 mm plastic, black, anti-static UL 94-V0,  
maximum temperature up to 120°C



For PCBs	Packs of	Order No.			
		for CPCI		for VME	
		perforated <sup>1)</sup>	solid <sup>1)</sup>	solid	solid
3 U x 160 mm	1	<b>3687.932</b>	<b>3686.572</b>	<b>3685.966</b>	<b>3685.626</b>
	5	–	–	–	<b>3685.279</b>
3 U x 220 mm	1	–	–	–	<b>3685.805</b>
	5	–	–	–	<b>3685.266</b>
6 U x 80 mm	1	<b>3687.933</b>	<b>3686.573</b>	<b>3686.037</b>	<b>3686.146</b>
	1	<b>3687.934</b>	<b>3686.574</b>	<b>3685.967</b>	<b>3685.627</b>
6 U x 160 mm	1	<b>9905.574<sup>2)</sup></b>	<b>9905.990<sup>2)</sup></b>	–	–
	5	–	–	–	<b>3685.280</b>
6 U x 220 mm	1	–	–	–	<b>3685.824</b>
	5	–	–	–	<b>3685.000</b>



#### ! Also required:

Required for mounting the perforated CPCI covers:  
Mounting clips, Packs of = 100  
order no. 3687.955