

# CGA4J3C0G2E562J125AE

TDK Item Description : CGA4J3C0G2E562JT\*\*\*S



Equivalent C2012C0G2E562J for Automotive

## Application & Main Feature

Automotive Grade ( Soft Termination )

## Series

CGA4(2012) CC0805]



## Dimensions

|   |                     |
|---|---------------------|
| L | 2.00mm +0.45,-0.2mm |
| W | 1.25mm +0.25,-0.2mm |
| T | 1.25mm +0.25,-0.2mm |
| B | 0.20mm Min.         |
| G | 0.50mm Min.         |

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

2E (250Vdc)

## Capacitance

5.6nF

## Capacitance Tolerance

J (+/-5%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min


## AEC-Q200

Yes


**|Z|, ESR vs. Freq. Characteristics  
(Simulation Data)**

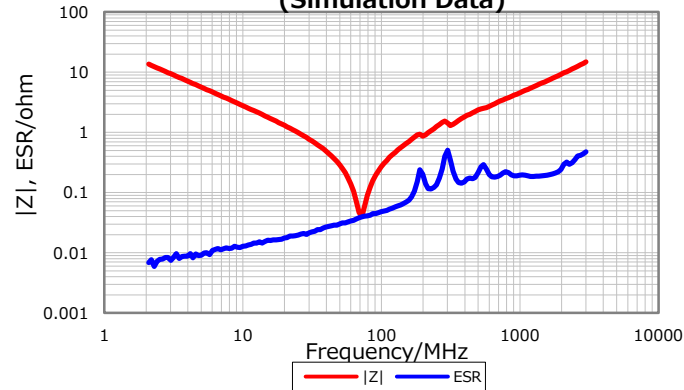


**DC Bias Characteristic**

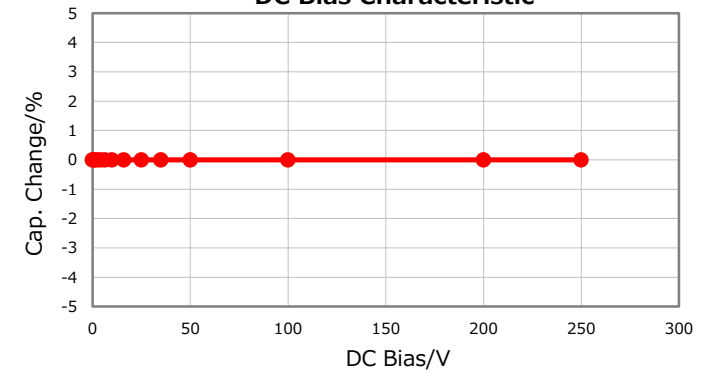

**Cap. vs. Freq. Characteristic**

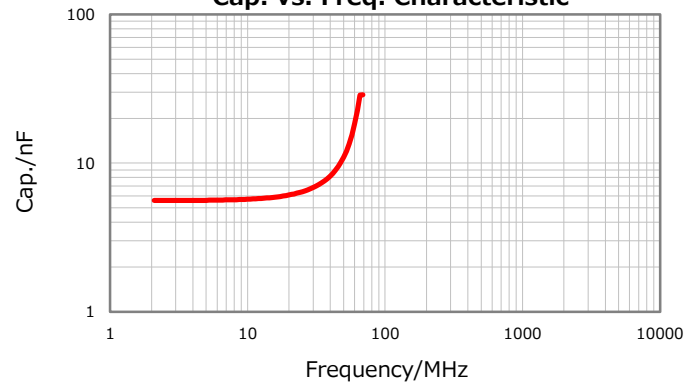

**Temperature Characteristics**

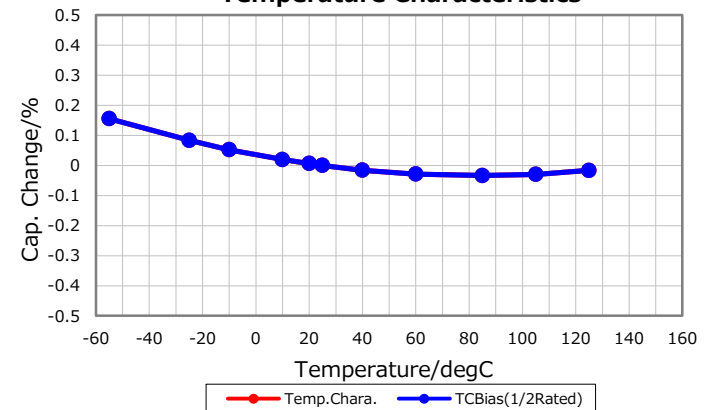

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

May 12, 2017