



DIMENSIONS:	
A	2.813" ±0.063
B	3.313" ±0.125
C	3.421" ±0.063
D	2.250" ±0.063
E	2.125" ±0.063
G	0.203" x 0.375" ±0.015

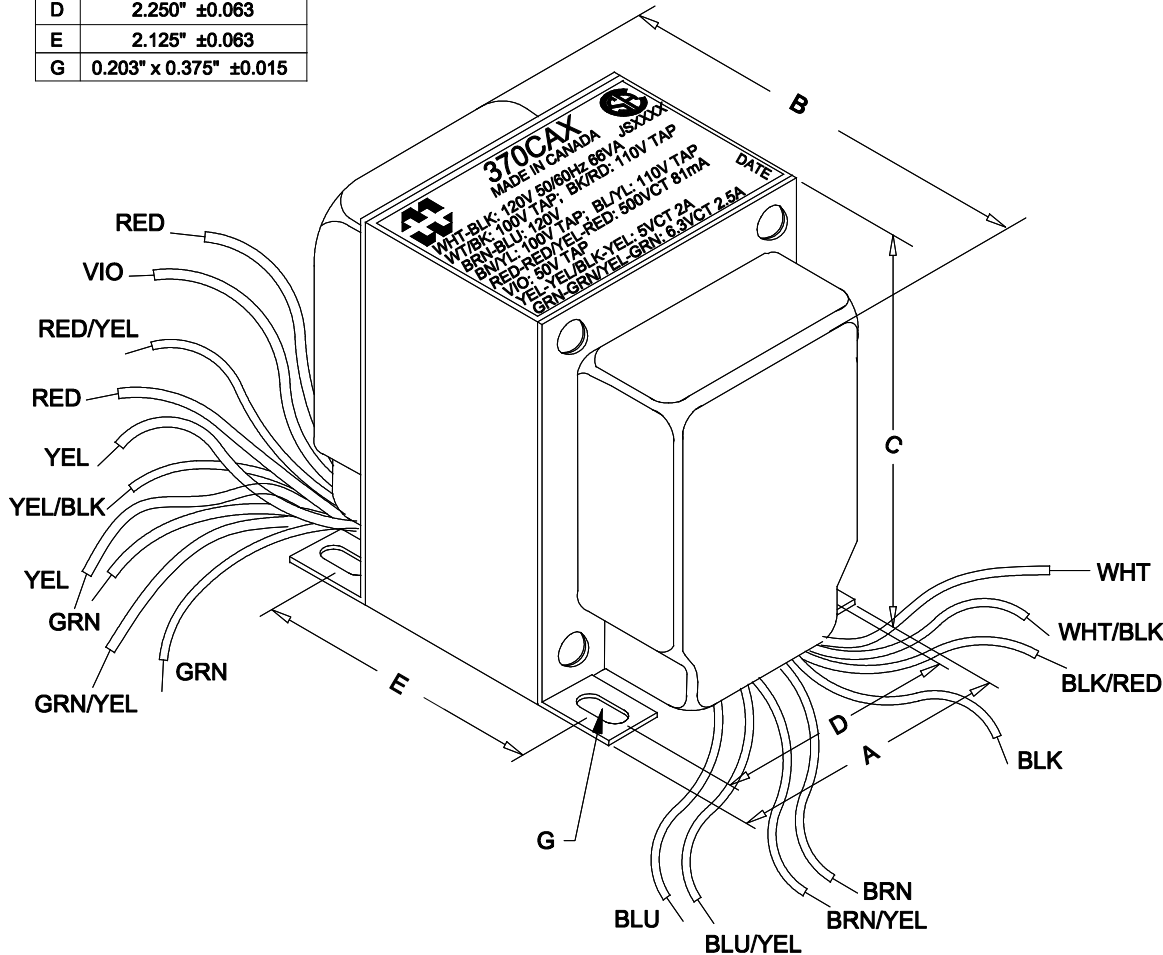

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

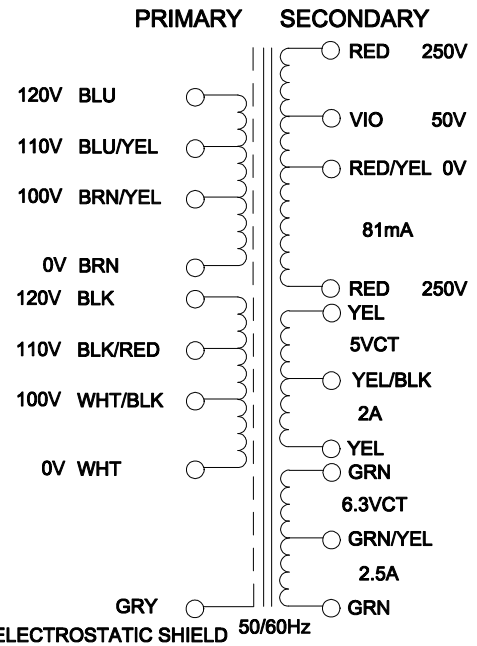

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I <sub>ex</sub>	@ 120V, 60Hz, WHT - BLK	83mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	542.0V ±2%
	RED - RED/YEL = RED/YEL - RED =	271.0V ±2%
	RED/YEL - VIO =	51.25V ±2%
	YEL - YEL =	5.500V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.750V ±2%
	GRN - GRN =	7.000V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.500V ±2%
DCR	@ 20°C, WHT - BLK =	12.12 Ω ±20%
	@ 20°C, BRN - BLU =	13.10 Ω ±20%
	@ 20°C, RED - RED =	264.5 Ω ±20%
	@ 20°C, YEL - YEL =	0.110 Ω ±20%
	@ 20°C, GRN - GRN =	0.146 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	08/17/12

**HAMMOND MANUFACTURING™** ELECTRONIC DIVISION  
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5  
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 370CAX
DATE: 08/17/12	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		