


## HC-B 16-TFL-76/O1STM25S

Order No.: 1645037

The illustration shows the version HC-B 16-TFL-76/O1STM40S

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1645037>

HEAVYCON sleeve housing B16, for single locking latch, height 76 mm, without support 1x M25, lateral conductor exit

| Commercial data          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 017918 912895 |
| sales group              | D002  |
| Pack                     | 10 pcs.   |
| Customs tariff           | 85389099  |
| Catalog page information | Page 488 (PC-2009)  |

**Product notes**WEEE/RoHS-compliant since:  
03/01/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


**Technical data**

| General data |  |
|--------------|--|
| Note         | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design       | B16  |
| Height       | 76 mm  |
| Width        | 43 mm  |

|                                 |                          |
|---------------------------------|--------------------------|
| Length                          | 94 mm                    |
| Housing type                    | Sleeve housings          |
| Locking type                    | for single locking latch |
| Cable exit                      | Lateral                  |
| Type of the screw connection    | 1x M25                   |
| Degree of protection            | IP65                     |
| Ambient temperature (operation) | -40 °C ... 125 °C        |
| Housing material                | Aluminum, die-cast       |
| Housing surface material        | Powder-coated, gray      |

### Diagrams/Drawings

Dimensioned drawing

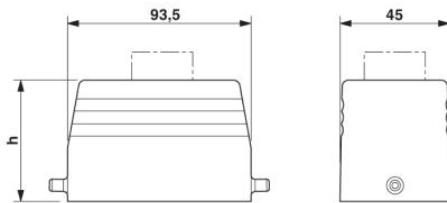

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;