

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE COMPACT LINE interface module for Siemens S7-1500 systems with S7-1500 specific labeling, with screw connection, external power distribution connections, module width: 128.2 mm

Why buy this product

- Single 50-pin FLK header
- Three-level, screw terminal field connections
- Printed channel markings
- External power distribution connections



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 363509
GTIN	4055626363509

Technical data

Dimensions

Width	128.2 mm
Height	68.8 mm
Depth	60.7 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	60 V AC/DC
Max. perm. current (per branch)	1 A
Max. permissible current (separate power supply)	7 A
Number of positions	50

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Technical data

General

Status display	No
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	50
Pitch	2.54 mm

Supported controller

Controller	SIEMENS S7-1500
- suitable I/O card	6ES7 531-7KF00-0AB0
	6ES7 531-7NF00-0AB0
	6ES7 531-7NF10-0AB0
	6ES7 531-7PF00-0AB0
	6ES7 532-5HF00-0AB0

Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Dimensional drawing

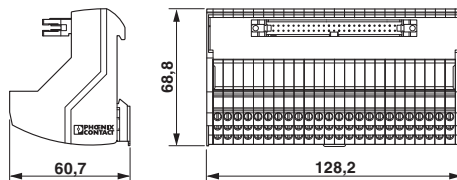

Circuit diagram

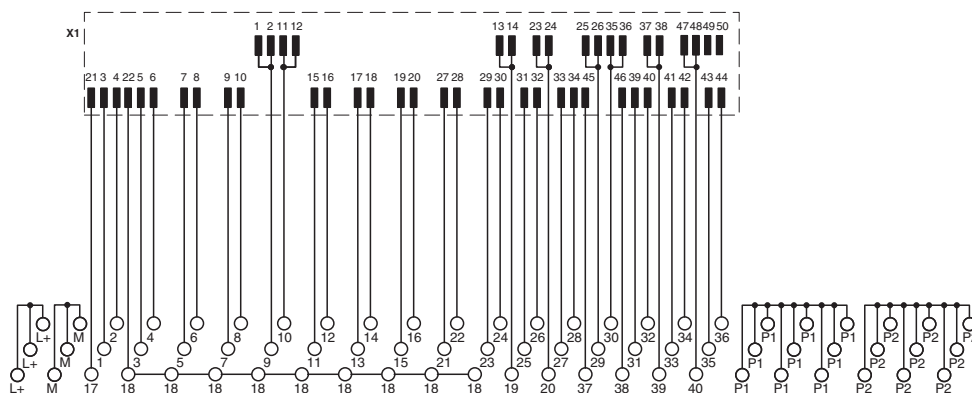

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / cCSAus

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	60 V		
Nominal current IN	7 A		
mm ² /AWG/kcmil	30-12		

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	60 V		
Nominal current IN	7 A		
mm ² /AWG/kcmil	30-12		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	60 V		
Nominal current IN	7 A		
mm ² /AWG/kcmil	30-12		

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	60 V		
Nominal current IN	7 A		
mm ² /AWG/kcmil	30-12		

cCSAus			
--------	--	--	--

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>