


**NOTES:**

- ① MAT'L: COPPER (STOCK TKN.  $\frac{.040}{1.02}$ )
  - ② PLATING: ELECTRO TIN (.0003 MIN)
  - ③ TIN-PLATED BRASS FUNNEL FERRULE
  - ④ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ( $\pm .005$ )
- 02 = .094  
 04 = .119  
 06 = .146  
 08 = .173  
 10 = .198  
 14 = .265  
 56 = .328  
 38 = .390
- "UL" LISTING #E32244  
 "CSA" LISTING #18689
- WIRE SIZE: 12 - 10 AWG  
 4.0 - 6.0 MM<sup>2</sup>

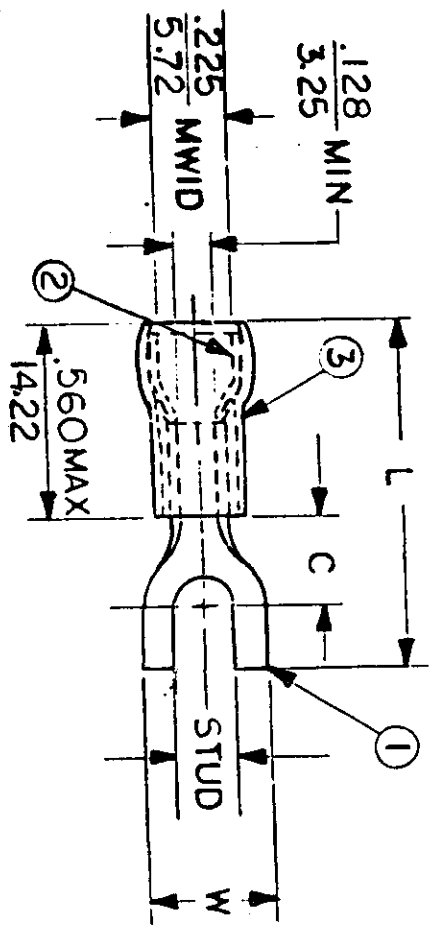

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$  (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES	REFERENCE		SCALE: NTS		DATE	TITLE:
					DRWN. BY:	CHKD. BY:	APPRD. BY:			
C-841-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.118}{28.40}$	06,08,10	JJ	GZ		11.12.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	
C-868-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.271}{32.28}$	10,14,56				11.26.84		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					FRAC.		DEC.		ANG.	
					±		±		±	

