


CUSTOMER DRAWING

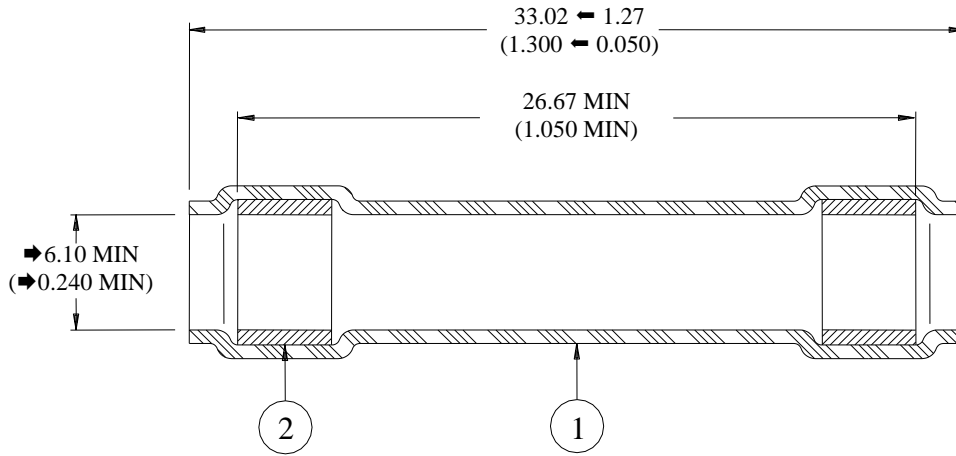


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer.
2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoropolymer. Color: **Clear**

APPLICATION

1. This device is designed to provide immersion resistant 1 to 1 splices in wires having insulations rated for at least 135°C and conductor falling within the wire size range as listed above.
2. Continuous Operating Temperature of 200°C (392°F)
3. Free recovered I.D. of sealing sleeve is 1.27 (0.050) maximum (through inserts).

			TITLE: SEALING SLEEVE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: D-200-09		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: C	DATE: December 12, 2016	
PREPARED BY: YNGUYEN	CAGE CODE: 06090	REVISED PER. ECO-16-017600	SCALE: DO NOT SCALE	SIZE: A	SHEET: 1 of 1

© 2012-2016 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.