
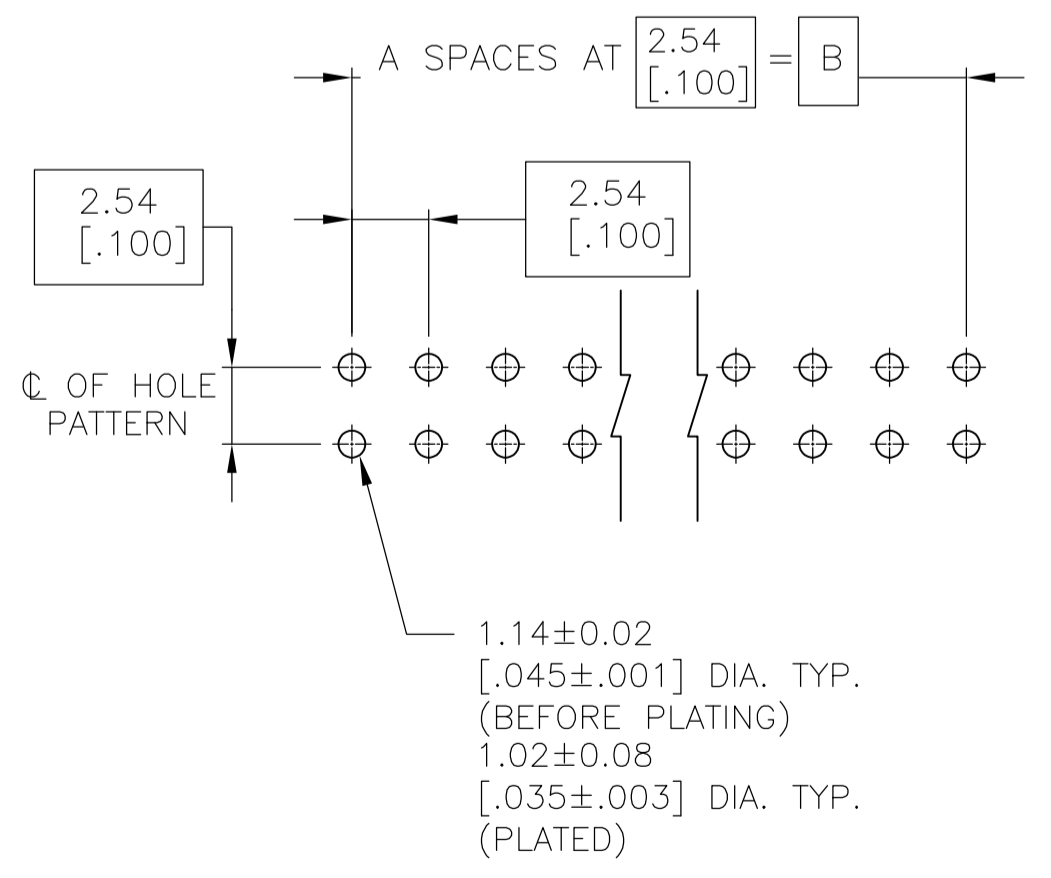


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 5 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION

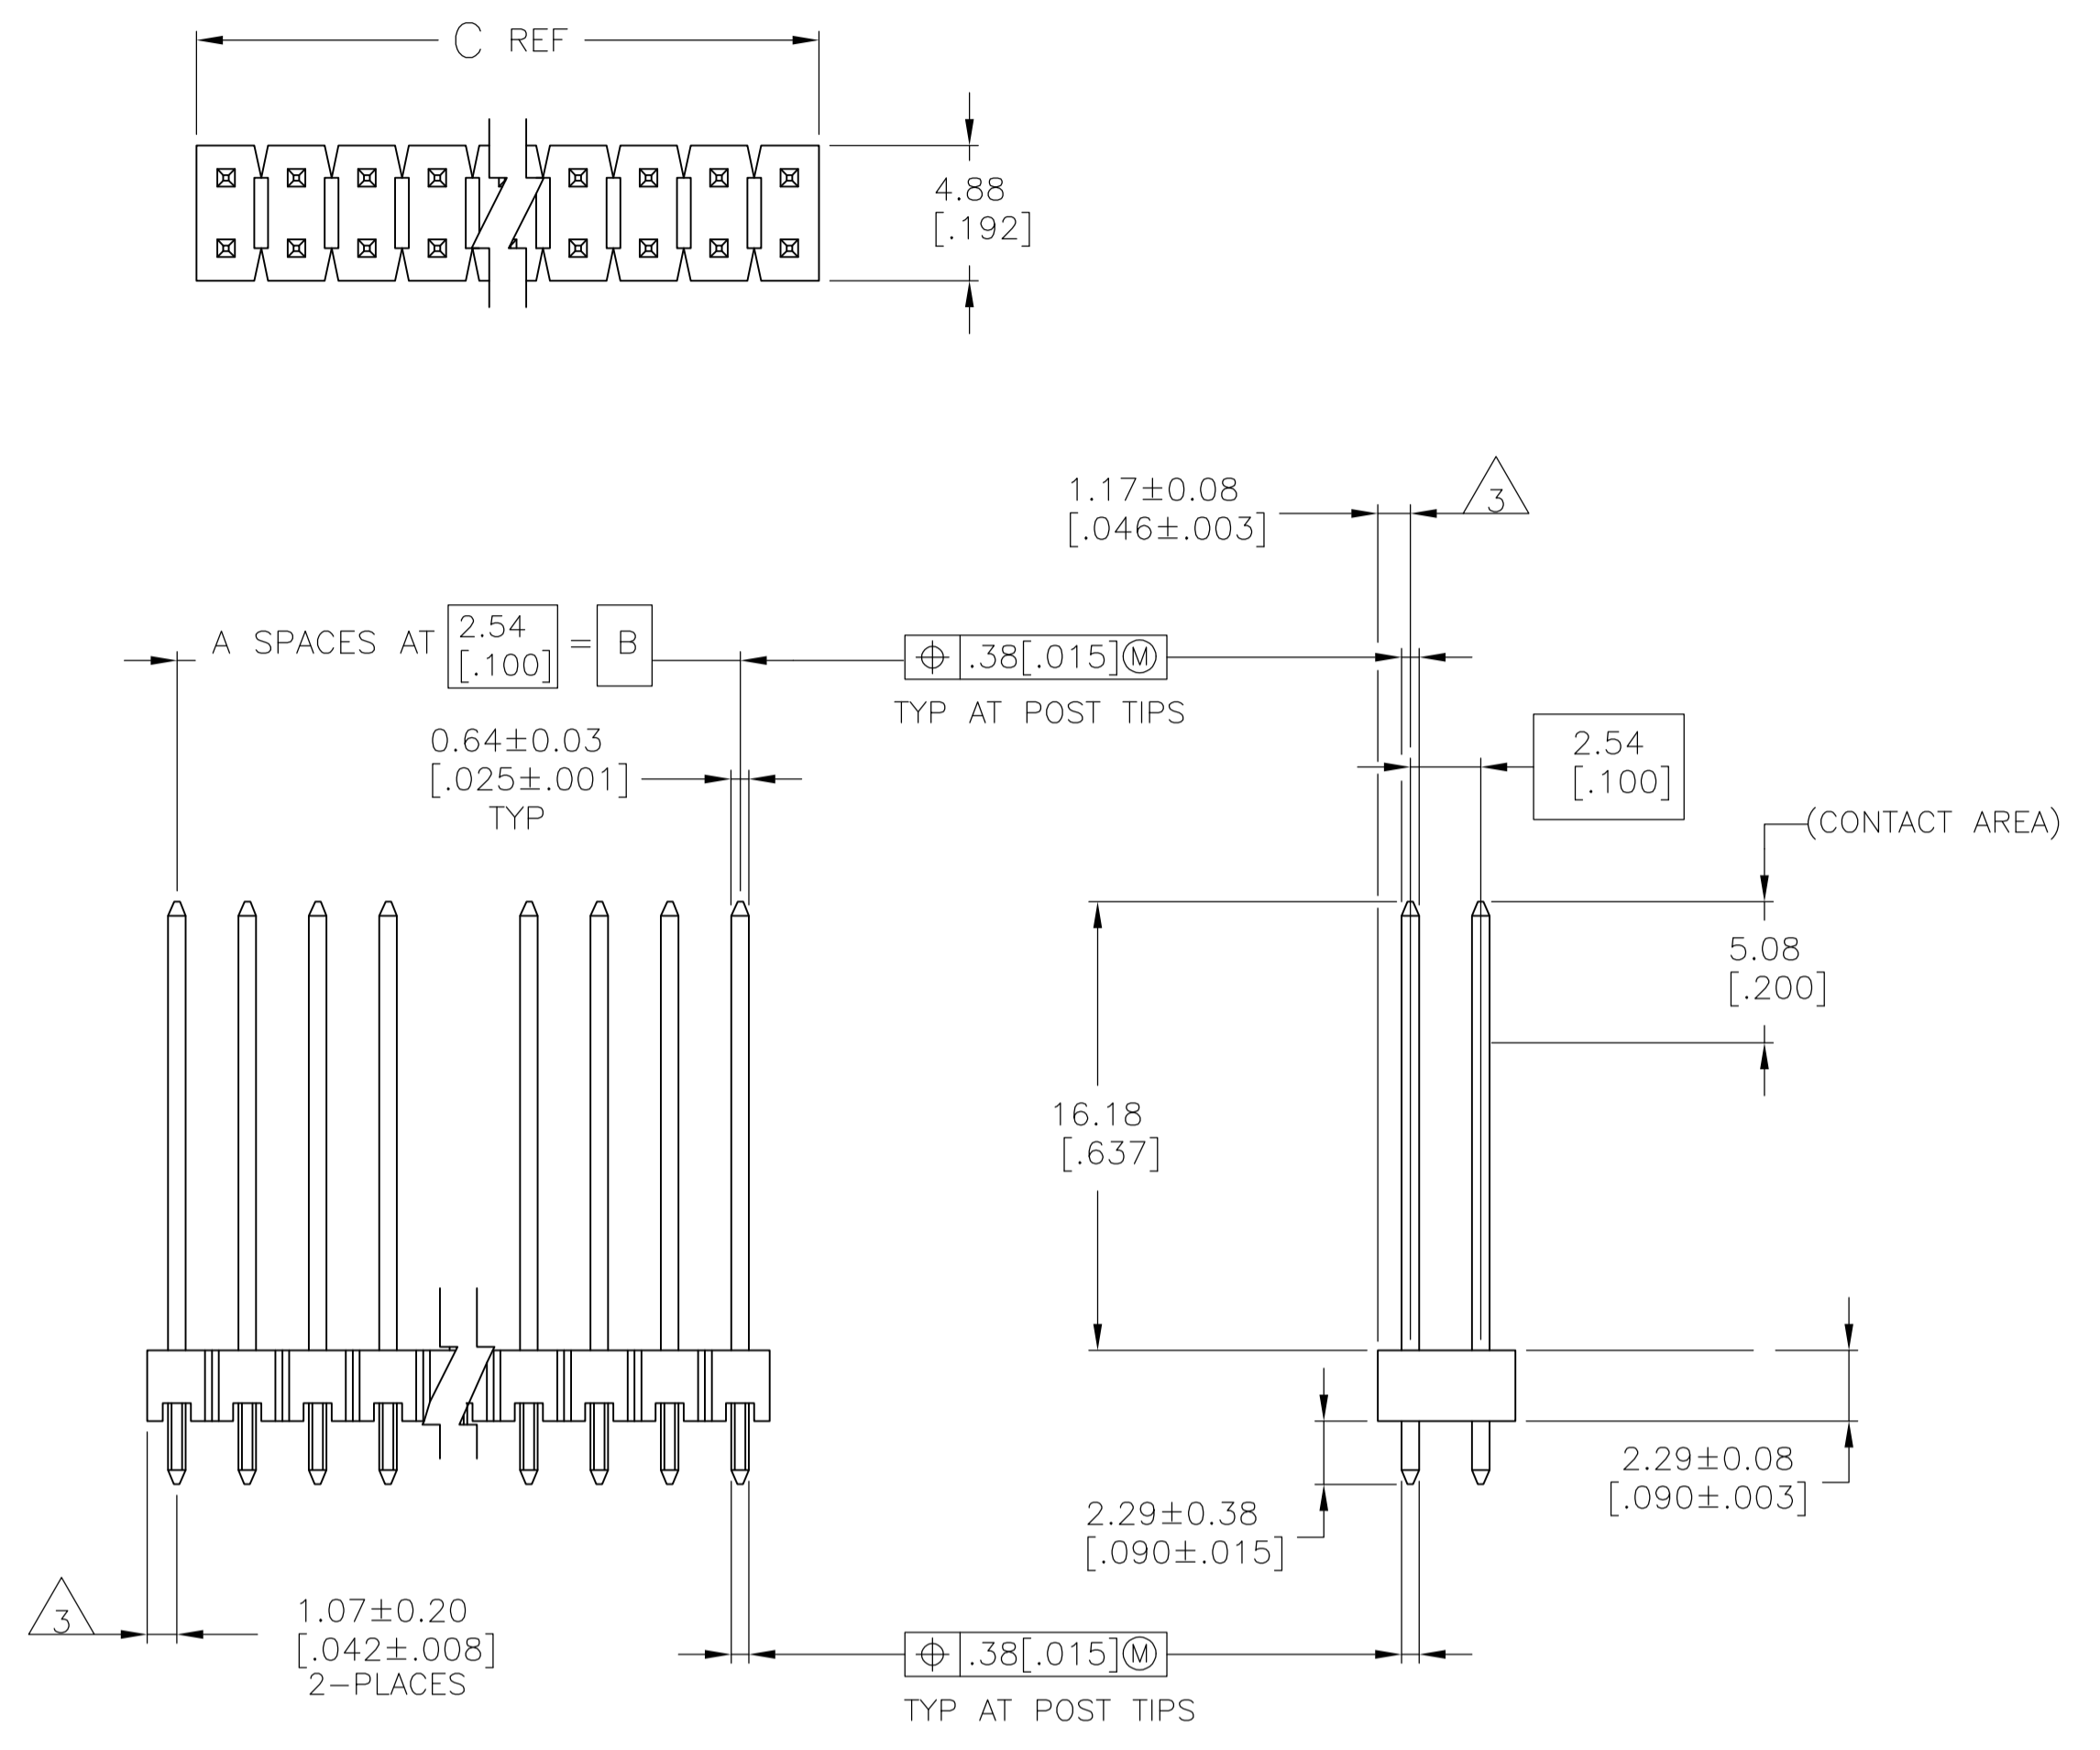

RECOMMENDED HOLE LAYOUT

6	5	101.19 [3.984]	99.06 [3.900]	39	80	5-146433-1
	4	101.19 [3.984]	99.06 [3.900]	39	80	146433-1
REMARKS	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN T. HOFFMAN 07-09-95	APVD G. DUBNICZKI 02-10-95	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± 0.51[.02]	3 PLC ± 0.127[.005]	4 PLC ± 0.0127[.0005]
ANGLES ± -				
MATERIAL: POST: COPPER ALLOY	FINISH: SEE TABLE	WEIGHT: -	SIZE: A1	00779 C=146433
CUSTOMER DRAWING		SCALE: 4:1	SHEET: 1 OF 1	REV: D

STE TE Connectivity

HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, VERTICAL, .025 SQ. POSTS