

# SPECIFICATION CONTROL DRAWING

**55A6696**


**TITLE** THREE CONDUCTOR CABLE, UNSHIELDED, UNJACKETED,  
600 VOLT

**DATE:**  
4-6-88

**REVISION:**  
A

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENTS - 55A6688-AWG

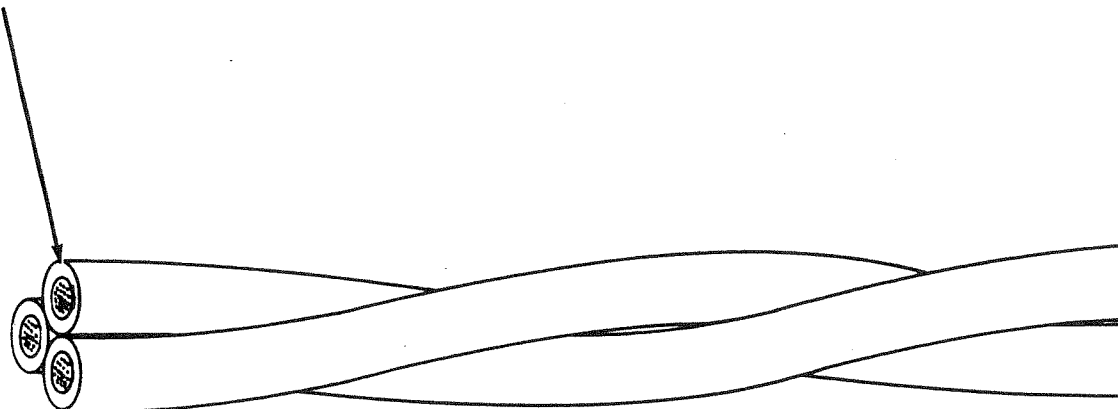

CABLE CONSTRUCTION DETAILS			
PART NUMBER	CONDUCTOR SIZE (AWG)	MAXIMUM OUTSIDE DIAMETER (inch)	MAXIMUM WEIGHT (lbs/1000 ft.)
55A6696-26-*	26	.068	4.2
55A6696-24-*	24	.084	6.1
55A6696-22-*	22	.097	8.7

### ADDITIONAL REQUIREMENTS

CABLE LAY: AWG 26, 0.75 inch (minimum), 1.1 inch (maximum)  
 AWG 24, 0.86 inch (minimum), 1.2 inch (maximum)  
 AWG 22, 1.0 inch (minimum), 1.5 inch (maximum)

Except as specified above, this construction shall meet all the requirements of Raychem Specification Sheet 55A0134.

**PART NUMBER:**

The "\*" in the part numbers above shall be replaced by color code designators with slashes separating component wire colors.

Example: AWG 26, white, black and red components: 55A6696-26-9/0/2

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

## **Raychem**

**Raychem Corporation**  
 300 Constitution Drive, Menlo Park, California 94025-1165  
 415) 361 3333 TWX 910 373 1728