


# Wireless External Dual-Band Antenna for 5.15 GHz & 5.85 GHz Applications

Pulse Part Number: W1028

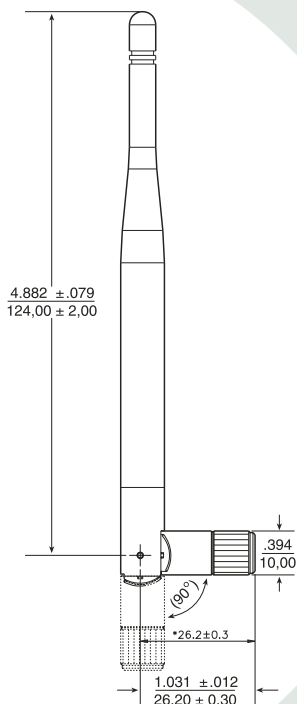

## Features

- High frequency and high gain antenna
- For WLAN devices using WiFi (802.11a) and ISM 5.8 GHz band
- Omni-directional radiation pattern provides broad 360° coverage
- One-quarter wavelength dipole configuration
- Connection and color options easily integrate with OEM design

## Color Options

- Black\*
- Gray (Pantone cool gray 8C)

## Connector Options

- Reverse SMA (Male)\*
- SMA (Male)

\* Default Configuration – Please contact Pulse Applications Engineering for assistance in ordering colors and connectors

Weight.....12.9 grams  
 Carton.....20/bag; 500/carton

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$

## Electrical Specifications @ 25 °C

Note: This part number is lead-free and RoHS compliant. No additional suffix or identifier is required.

Antenna Part No.	Frequency [GHz]	Gain [dBi]	Impedance [Nom]	VSWR	Polarization	Electrical Length	Radiation	Color
W1028	5.15 – 5.85	2.0	50 Ω	≤ 1.9	Vertical	1/4, dipole	Omni	Black

### Pulse Antennas

Takatie 6  
 90440 Kempele, Finland  
 Tel: +358 207 935 500  
 Fax: +358 207 935 501  
[www.pulseeng.com/antennas](http://www.pulseeng.com/antennas)

### External Antennas Sales Contacts

USA 858 674 8100  
 UK 44 1483 401 700  
 France 33 3 84 35 04 04  
 Singapore 65 6287 8998

Shanghai 86 21 32181071  
 China 86 769 5538070  
 Taiwan 886 2 26980228



# Wireless External Dual-Band Antenna for 5.15 GHz & 5.85 GHz Applications


Pulse Part Number: W1028

## Application Notes


Omni-directional antennas provide a uniform, donut-shaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be used for a variety of other applications within the specified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

## Gain Performance W1028

### Horizontal Position

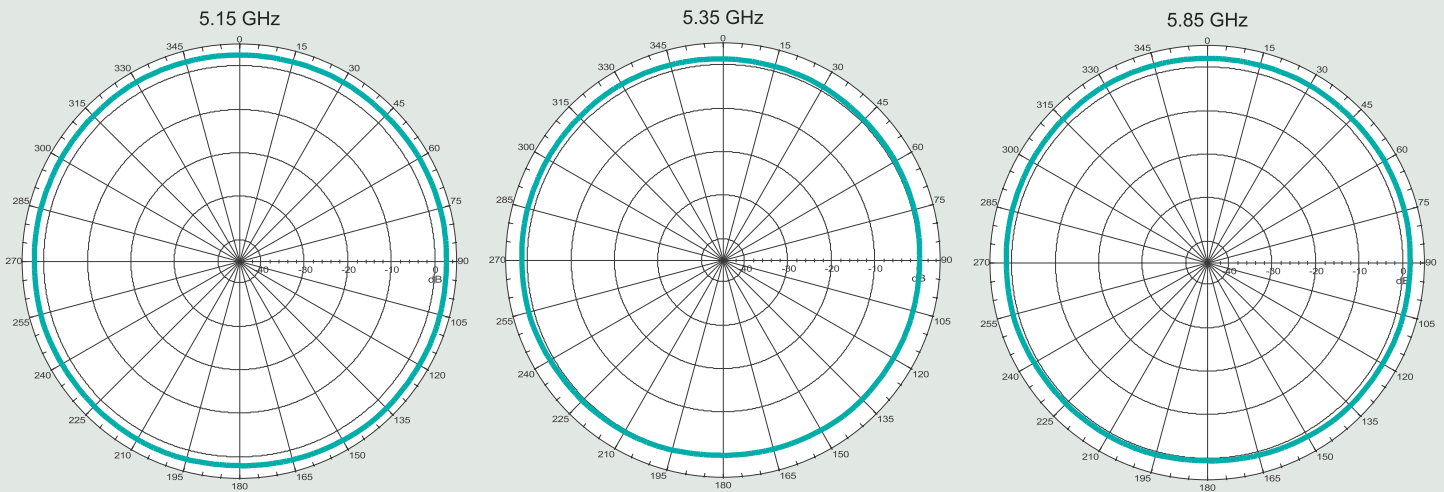

### Vertical Position

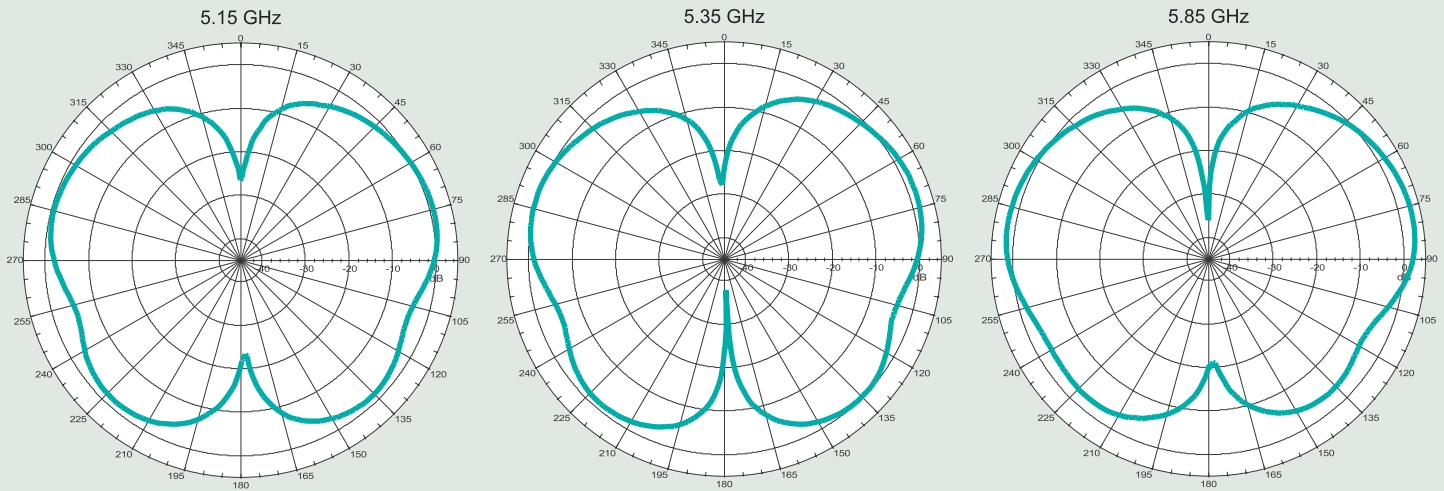

#### Pulse Antennas

Takatie 6

90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

[www.pulseeng.com/antennas](http://www.pulseeng.com/antennas)

#### External Antennas

##### Sales Contacts

USA 858 674 8100

UK 44 1483 401 700

France 33 3 84 35 04 04

Singapore 65 6287 8998

Shanghai 86 21 32181071

China 86 769 5538070

Taiwan 886 2 26980228

