
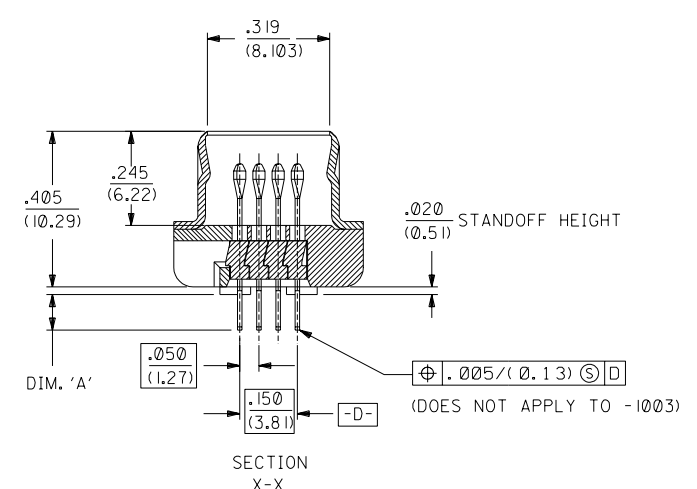
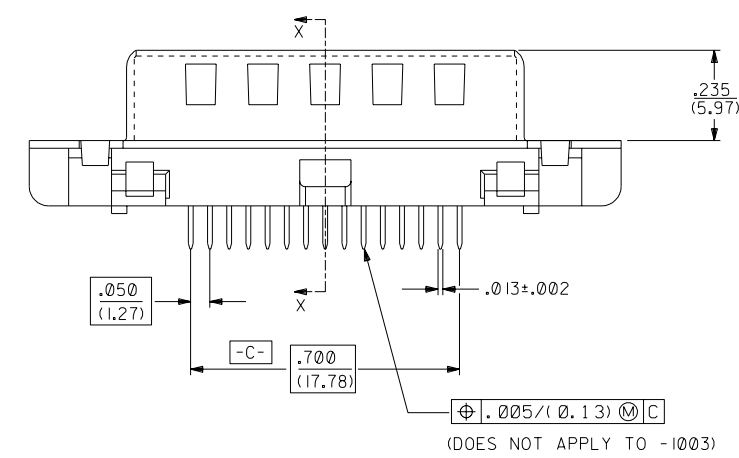


70929	4	3	2	1
ENGINEERING NUMBER	ORDERING NUMBER	DIM. 'A'	PACKAGING SPEC.	
A-70929-1001	15-92-2251	.092±.012 (2.34±0.30)	PK-70873-0226	
A-70929-1003	70929-1003	.570±.012 (14.48±0.30)	PK-70873-640	

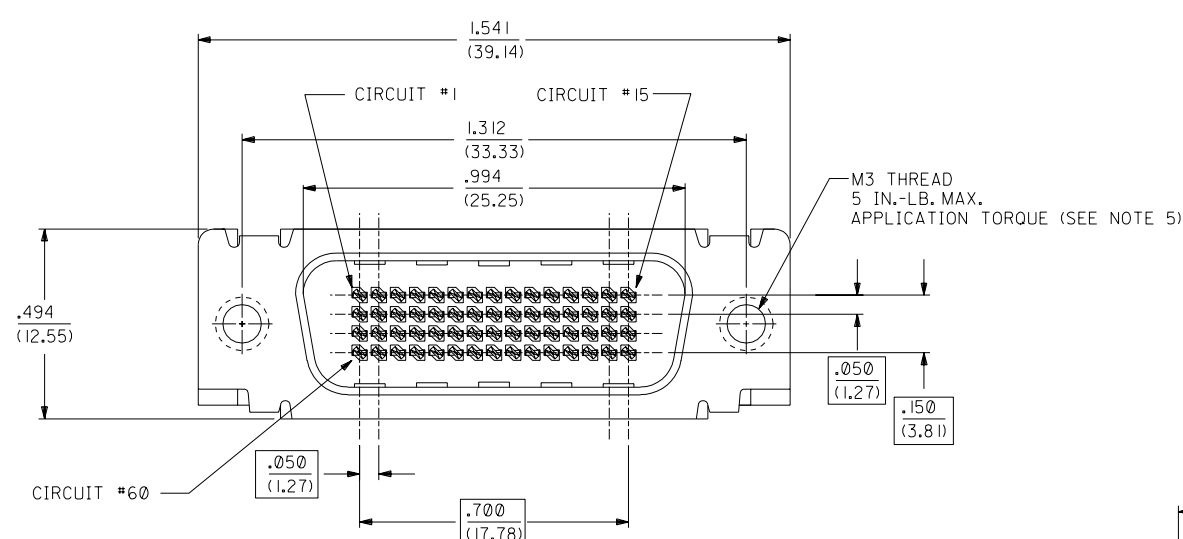

NOTES:

1) MATERIALS:  
 HOUSING: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, COLOR: BLACK.  
 MOLDED STICK: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, COLOR: BLACK.  
 MALE TERMINAL: PHOSPHOR BRONZE  
 OUTER SHELL: DEEP DRAWN STEEL.


2) PLATING :  
 TERMINAL: .000030/(0.000762) MINIMUM GOLD IN SELECTIVE AREA;  
 .000100/(0.00254) MINIMUM TIN IN SELECTIVE AREA;  
 OVER NICKEL UNDERPLATE OVERALL.

OUTER SHELL: .000100/(0.00254) MINIMUM BRIGHT NICKEL OVER COPPER FLASH (OPTIONAL).


NOTE FOR LEAD FREE CONVERSION:  
 THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

- 3) CONFORMS TO PRODUCT SPECIFICATION PS-70928.
- 4) PARTS TO BE PACKAGED PER CHART.
- 5) THREAD GAUGE MAY REQUIRE UP TO 1 IN.-LB. OF TORQUE DURING GAUGING PROCESS.

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM	
3 PLACE ± INCH METRIC		TITLE .050" PITCH LFH 60 CKT VERTICAL D-SUB SALES ASSY MALE	
2 PLACE ± INCH METRIC		MOLEX INCORPORATED SHEET NO. DATE LITSE,ILL. 60532 U.S.A. 1 OF 2 01/21/92	
1 PLACE --- ± INCH METRIC		PART NO. DRWG. NO. SEE CHART SDA-70929-1001	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FILE NAME 570929X2.DGN	
DRWG. BY: MOS	CHK'D. BY: CAB	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	
APP'D. BY: CAB	SCALE: 4: 1	DIV.:	SIZE: CD C
LTR.	REVISIONS	LTR.	REVISIONS

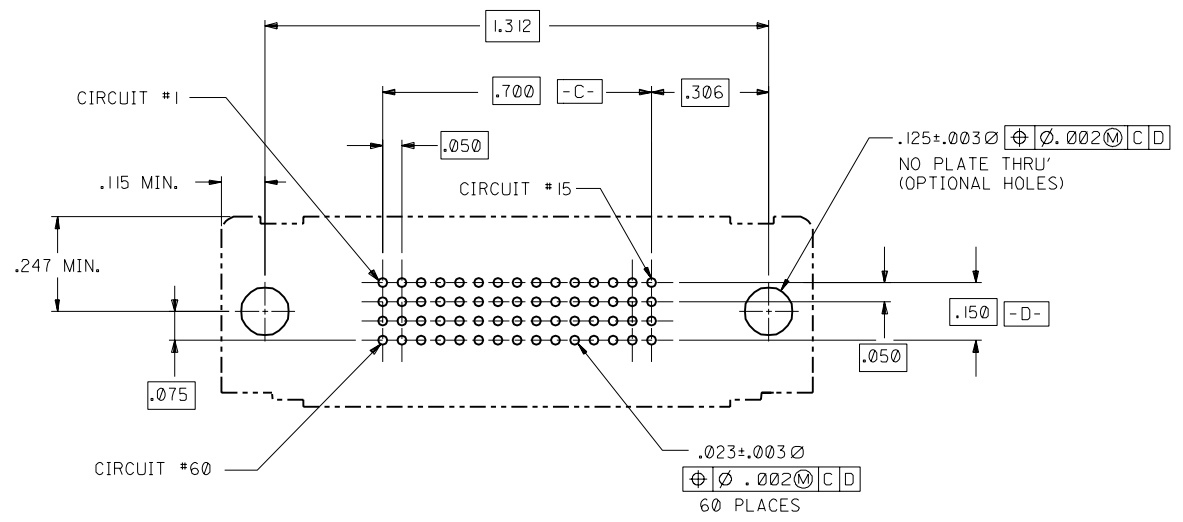

RECOMMENDED P.C.B. LAYOUT  
COMPONENT SIDE

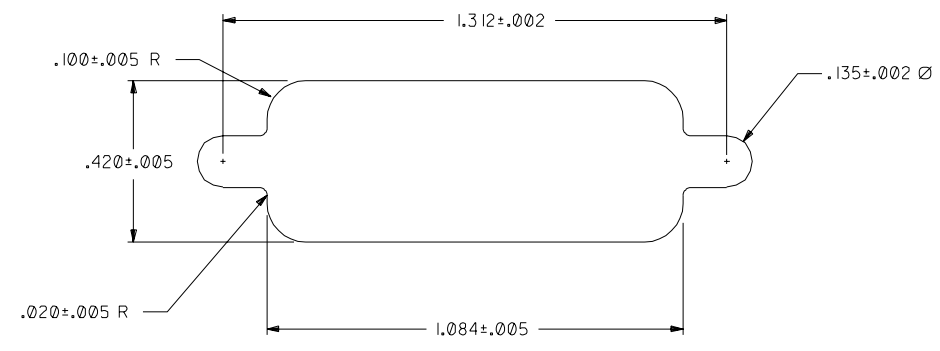

RECOMMENDED PANEL CUT-OUT

70929

MFG. SH. REV.

LTR.	REVISIONS	LTR.	REVISIONS
		D	SEE SHEET 1
		C1	SEE SHEET 1

DIMENSIONS SHOWN (METRIC) INCH	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°	
3 PLACE ±	---
2 PLACE ±	±
1 PLACE ---	±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
DRWG. BY: MOS	CHK'D. BY: CAB
APP'D. BY: CAB	SCALE: 4: 1

TITLE: .050" PITCH LFH 60 CKT VERTICAL D-SUB SALES ASSY MALE  
 MOLEX INCORPORATED  
 PART NO. 15-92-2251  
 SHEET NO. 2  
 DATE 01/21/92  
 U.S.A.  
 DRWG. NO. SDA-70929-1001  
 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.