

ITEM	MOLEX NO	DESCRIPTION	QTY	UOM
A,C	5055650201	1.25WTB SINGLE REC HSG 2CKT BLACK	2	PC
B	5054311000	1.25 ROBUST W/B CRIMP TERM.	4	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

CKT NO		WIRE #	COLOR	DESCRIPTION
From	To			
A1	C2	884530501	BLACK	1X26AWG DISC PVC BK 0.98MM UL1061 HOOKUP
A2	C1			

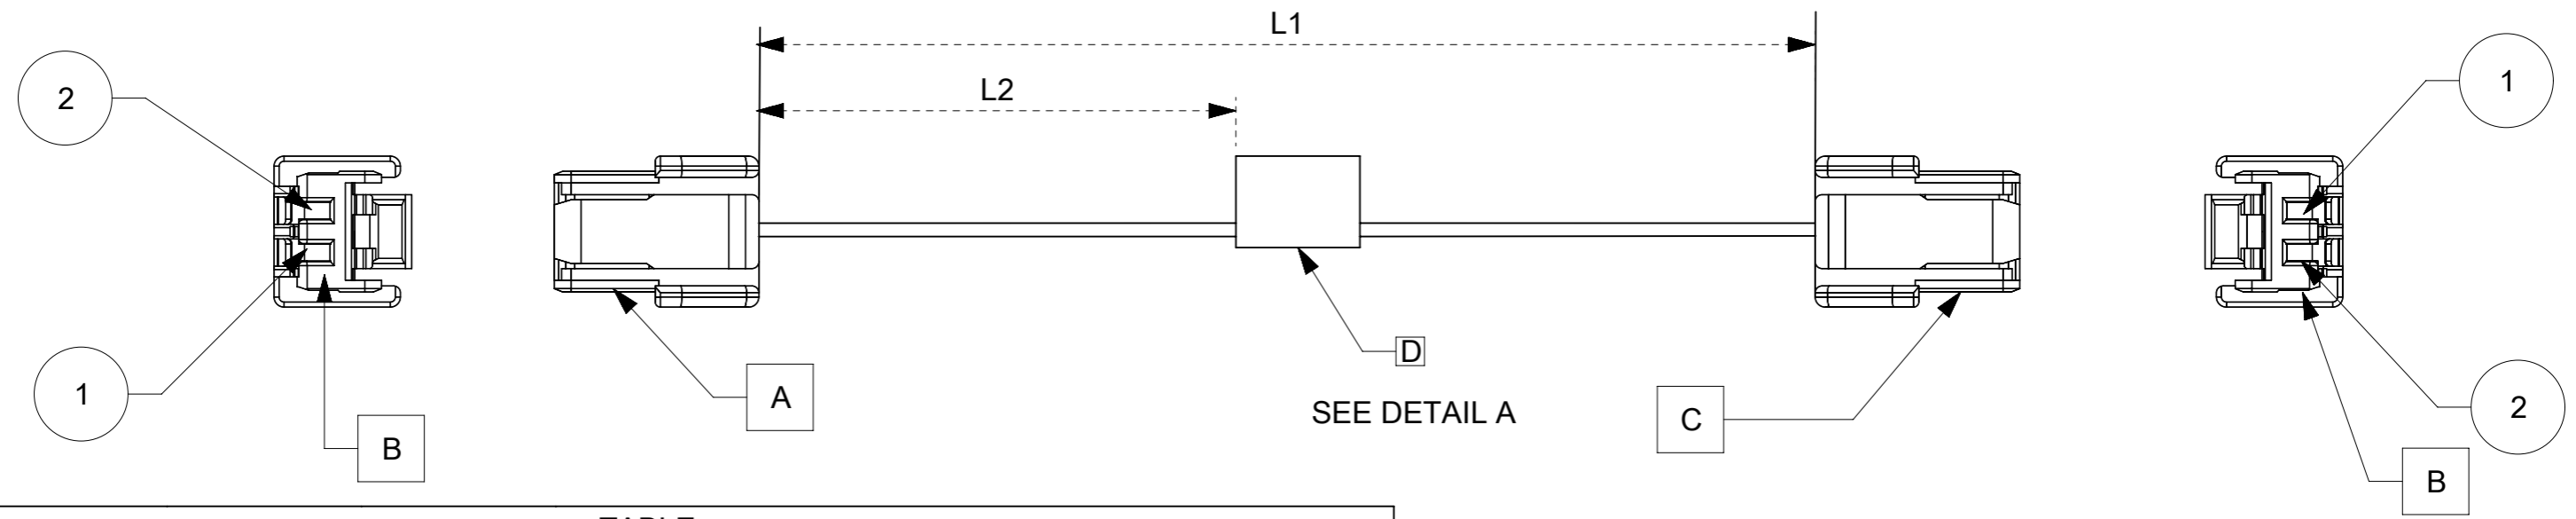


TABLE			
PART NUMBER	L1	L2	TITLE
451110200	50±5	18REF	Microlock Plus Cable Black 2-ckt 50MM
451110201	100±8	44REF	Microlock Plus Cable Black 2-ckt 100MM
451110202	150±10	69REF	Microlock Plus Cable Black 2-ckt 150MM
451110203	300±10	144REF	Microlock Plus Cable Black 2-ckt 300MM
451110205	450±15	219REF	Microlock Plus Cable Black 2-ckt 450MM
451110206	600±15	294REF	Microlock Plus Cable Black 2-ckt 600MM

NOTES

1. This product must meet 2011/65/EC ROHS compliance.
2. Cable assembly to be tested 100% for continuity and polarity.
3. Label text must be 2mm max. In height with Arial font.
4. Connector view shown is from mating side.

DATE	REV	DESCRIPTION	CHANGER
2017.07.11	A	INITIAL RELEASE.	RDESAI01
2017.10.16	B	Document type change from RSD to SD	RDESAI01

P/N:45111XXXX MOLEX PN
MOLEX
Batch WK/YR

DETAIL A

QUALITY SYMBOLS FA = 0 FE = 0 FB = 0 FV = 0 FC = 0 FX = 0 FS = 0 FT = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS: mm SCALE: NTS		
	EC NO: 123387 DRWN: RDESAI01 CHK'D: MNRAYAN01 APPR: MNRAYAN01	2017/10/16 2017/10/16	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	DRWN BY: RDESAI01 DATE: 2017/07/11 CHK'D BY: MNRAYAN01 DATE: 2017/07/14 APPR BY: MNRAYAN01 DATE: 2017/07/14	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: A3 THIRD ANGLE PROJECTION	PRODUCT CUSTOMER DRAWING		SERIES: 45111 MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET
RELEASE STATUS: P1 RELEASE DATE: 16.10.2017 10:32:10		DOCUMENT NUMBER: 451110200 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1			