

SPECIFICATION SHEET

55A6547

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED,
TWO CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT

7 October 1986

Revision B

150°C


(B)

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRES - 55A6543

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

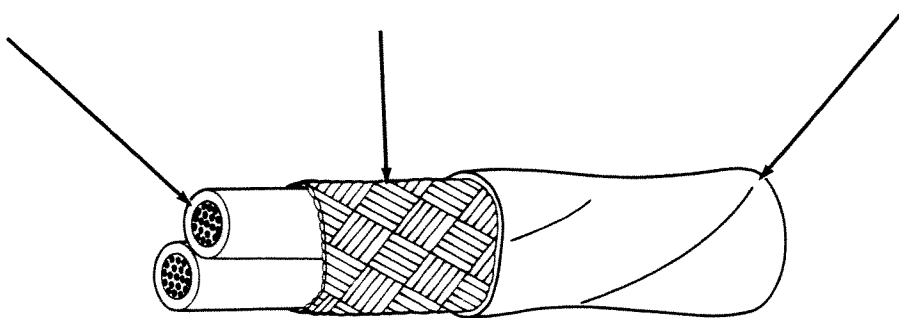

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
55A6547-24-*	24	38	.006	.008	.107	.113	9.5
55A6547-22-*	22	38	.006	.008	.119	.125	12.2
55A6547-20-*	20	38	.006	.008	.135	.141	16.5
55A6547-18-*	18	38	.006	.008	.155	.162	22.5
55A6547-16-*	16	38	.006	.008	.171	.178	27.3
55A6547-14-*	14	38	.006	.008	.205	.213	38.9
55A6547-12-*	12	38	.007	.009	.243	.251	54.7

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz
 FLAMMABILITY:
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);
 no flaming or facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 100% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts, 60 Hz (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test
 LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 THERMAL SHOCK: 300 ± 3°C for 6 hours
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a slash separating component wire colors and a dash separating the component wire colors from the jacket color.

Example:

AWG 20, white and black component wire colors;
 white jacket: 55A6547-20-9/0-9.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 415/ 361 3333 TWX 910 373 1205