

Pin strip - PST 1,3/ 9-5,0 - 1933257

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 9, Pitch: 5 mm, Color: Black, Contact surface: Tin, Assembly: Soldering, Voltage and current depend on the plug-in terminal block used. The value of the weaker component is always valid. Over 16 pos. upon request. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.




The figure shows a 10-position version of the product

Product Features

- Various pin lengths and pin geometries available on request
- Pin strip with pad pushed on for suction pipette for optional tape-on-reel packing
- 5.0 mm pitch
- Optimum pin geometry so as to not damage the plug
- Pin strip available in machine-capable packaging (tube magazine or tape)
- Reflow solderable pin strip, optimized for COMBICON compact plug-in connectors



Key commercial data

Packing unit	1 PCE
Minimum order quantity	50 PCE
GTIN	 4 017918 918743
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

Dimensions

Length	2.8 mm
Pitch	5 mm
Dimension a	40 mm
Pin dimensions	1,3 mm
Hole diameter	1.5 mm

Pin strip - PST 1,3/ 9-5,0 - 1933257

Technical data

General

Range of articles	PST 1,3/...-V
Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	12 A (depends on the plug used)
Maximum load current	12 A (depends on the plug used)
Insulating material	PA
Inflammability class according to UL 94	V0
Color	Black
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	16 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	10 A
Number of positions	9

Classifications

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432
UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701

Pin strip - PST 1,3/ 9-5,0 - 1933257

Classifications

eCl@ss

eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

Approvals

Approvals


Approvals


CSA / UL Recognized / SEV / cUL Recognized / GOST / CCA / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details


CSA 		
	B	D
Nominal current I _N	5 A	5 A
Nominal voltage U _N	300 V	300 V

UL Recognized 		
	B	D
Nominal current I _N	16 A	10 A
Nominal voltage U _N	300 V	300 V

Pin strip - PST 1,3/ 9-5,0 - 1933257

Approvals

SEV	
Nominal current IN	10 A
Nominal voltage UN	250 V

cUL Recognized 		
	B	D
Nominal current IN	16 A	10 A
Nominal voltage UN	300 V	300 V

GOST 	
--	--

CCA	
Nominal current IN	10 A
Nominal voltage UN	250 V


GOST 	
--	--

cULus Recognized 	
--	--


Drawings

Pin strip - PST 1,3/ 9-5,0 - 1933257


Drilling diagram

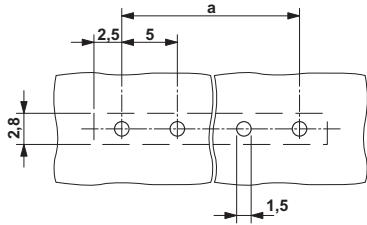


Diagram

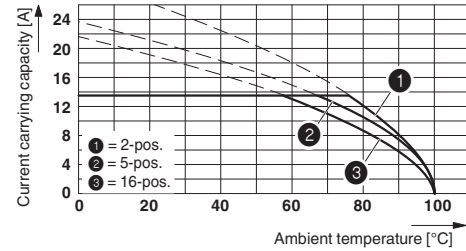

Diagram

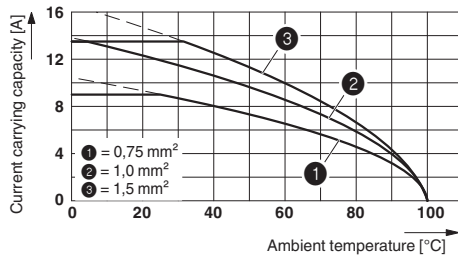

Diagram

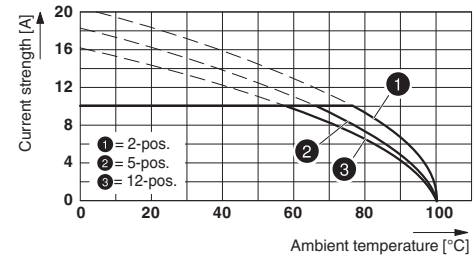

Type: PTS 1,5/...-PH-5,0 with PST 1,3/...-5,0

Dimensioned drawing

