



# FiT Families

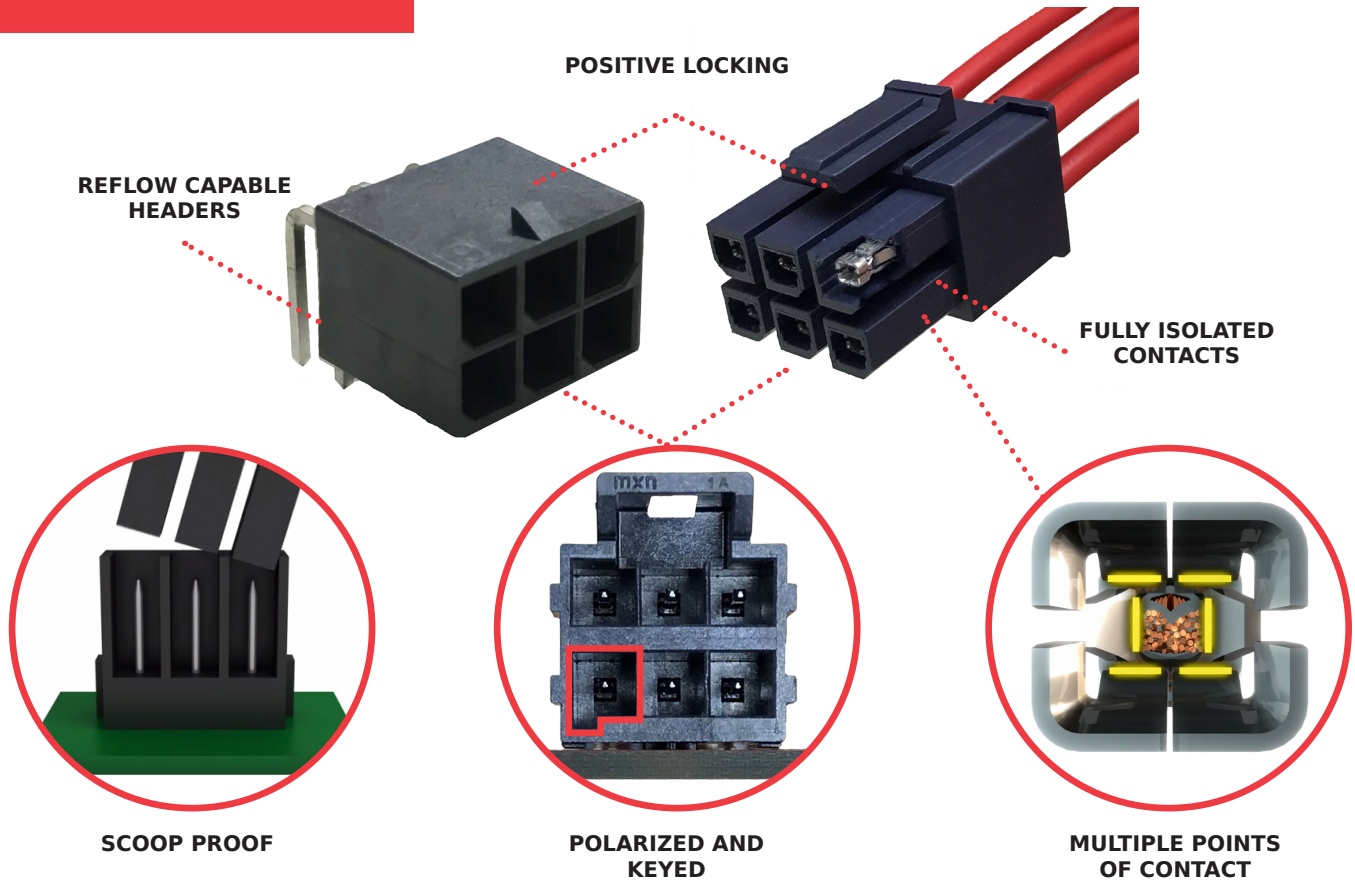

## FiT Families Comparison

	Nano-FiT™	Micro-FiT 3.0™	Ultra-FiT™	Mini-FiT®	Mega-FiT®
<b>Pitch</b>	2.50mm	3.00mm	3.50mm	4.20mm	5.70mm
<b>Style</b>	Wire-to-Board	Wire-to-Board Wire-to-Wire Board-to-Board	Wire-to-Board	Wire-to-Board Wire-to-Wire Board-to-Board	Wire-to-Board Wire-to-Wire
<b>AWG Range</b>	20-26 AWG	18-30 AWG	16-22 AWG	16-28 AWG	12-16 AWG
<b>Current (max.)</b>	6.5A	8.5A	14.0A	13.0A	23.0A
<b>Voltage (max.)</b>	250V	300V	400V	600V	600V
<b>Surface Mount</b>	Yes	Yes	No	No	No
<b>Glow Wire</b>	Yes	Yes	Yes	Yes	Yes
<b>UL 94V-0</b>	Yes	Yes	Yes	Yes	Yes
<b>TPA Retainer</b>	Yes	Yes	Yes	Yes	In Development
<b>Operating Temp (max.)</b>	+115°C	+105°C	+120°C	+105°C	+120°C
<b>Blind Mating</b>	No	Yes	No	Yes	No

## Dual-Row, Right-Angle - FiT Families Height and Width Comparison

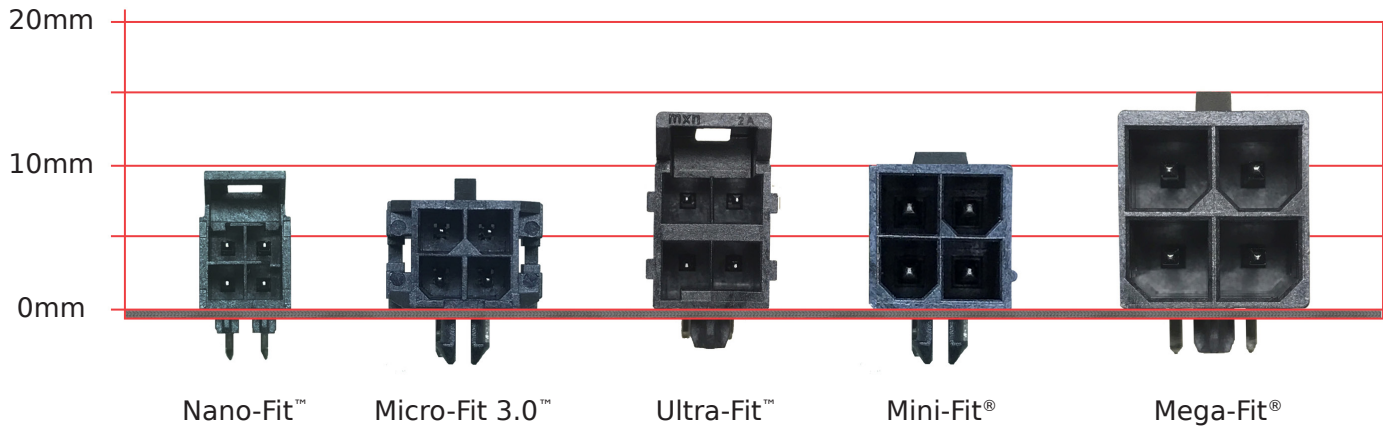

## Dual-Row, Vertical - FiT Families Mated Height Comparison

