
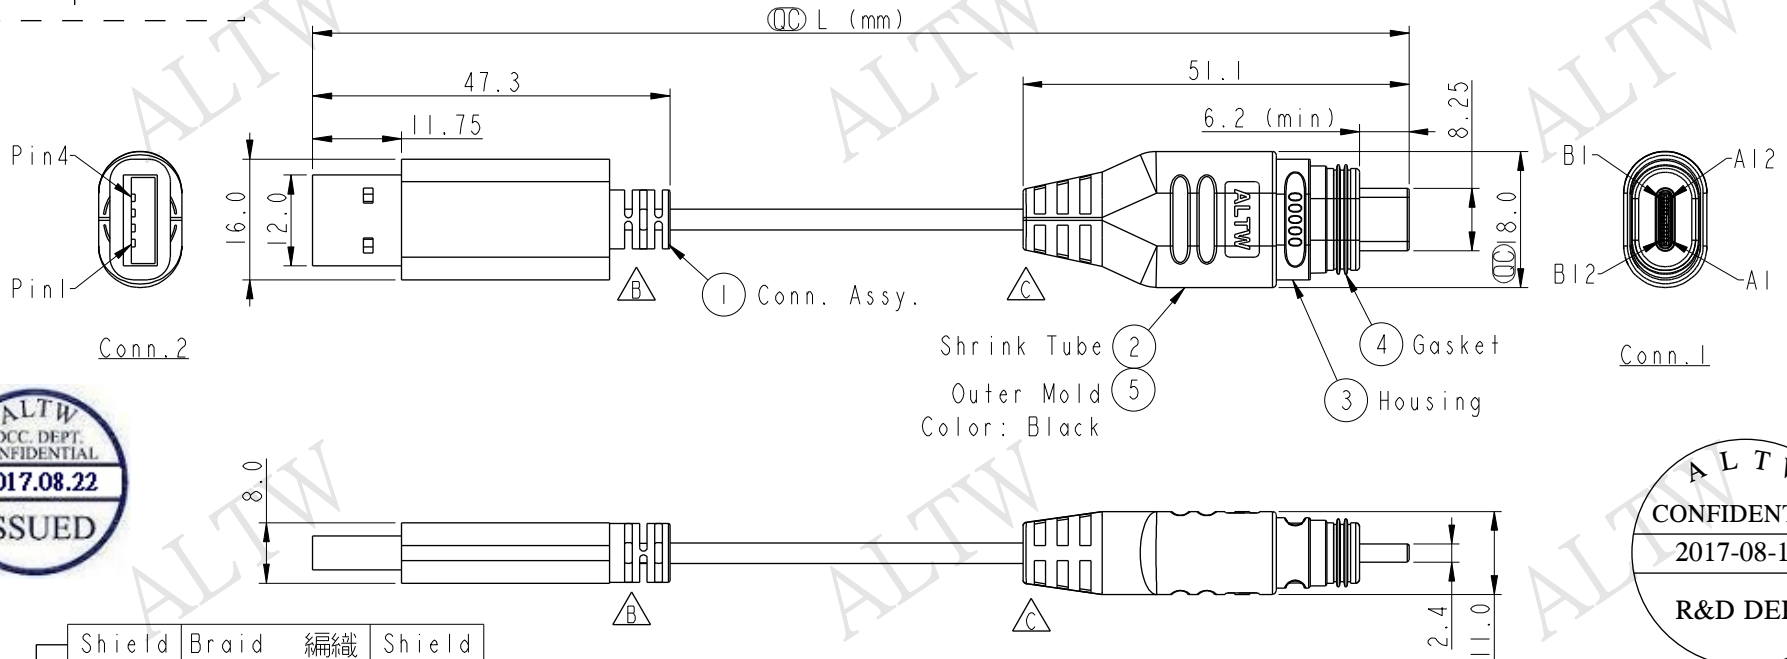


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial release	2016/05/18	Doreen	New item
B	LEN16B003I	2016/10/14	Cheng	Update SR of Conn.2 and note
C	LEN178113I	2018/08/15	Neo	Change SR in Conn.1

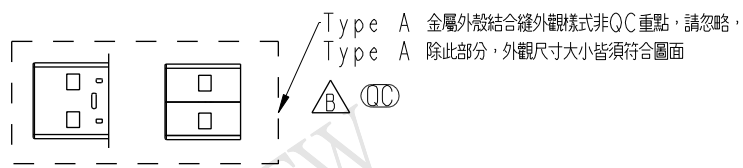

Shield	Braid	編織	Shield		
4	Black	黑	B12		
			B1		
			A12		
			A1		
3	Green	綠	A6		
			A7		
2	White	白	B9		
			B4		
1	Red	紅	A9		
			A4		
			Conn.2	Wire Color	Conn.1
			Pin Out		

Part Number: UC-20AMM-QA8AXX

Cable length--XX: 01~03 Meters  
 01: 1 Meter  
 02: 2 Meters  
 03: 3 Meters  
 Cable Length tolerance: 1~3M±50mm

- Note:
- \*  $\varnothing$  Important Dimension
  - \* Conn.1: USB Type C, Plug
  - \* Housing: PP, UL94 V-0, Black
  - \* Gasket: Silicone, Black  $\triangle$
  - \* Waterproof Rate: IP68(Mated)(under water, 1M, 24H)
  - \* Conn.2: USB Type A 2.0, Plug
  - \* Non-waterproof
  - \* Cable: UL2725 32AWG\*2C+24AWG\*1C+28AWG\*1C+D+A1/My+B PVC Jacket, OD=2.8mm, Black

UNIT:mm	
TOLERANCE	±0.5

TITLE USB TYPE C TO USB 2.0 TYPE A PLUG			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.15	$\varnothing$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Neo	DATE 2017/08/15
DWG NO UC-20AMM-QA8AXX	CHECKED BY Kris	DATE 2017/08/15
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/08/15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.